Panasonic®

Building Passion,
Building Solutions.
Panasonic Air Conditioning Systems

We face a time in which "quality air" differentiates business. It's a time for Panasonic to fully display its strengths. Our ability to assemble and build superior systems isn't just due to the rich resources we have as a comprehensive electronics manufacturer, but also to Panasonic's 100 years of tradition, where each person thinks and acts on their own initiative while working in a team to reach further heights. We do not compromise. Each of our independent selves is a one stop solution. We face our customers' challenges together with our customers and do all that we can to build effective systems. As a true partner for our customers, we strive to always be at the forefront of business.

- Please read the Installation Instructions carefully before installing the unit, and the Operating Instructions before using it.
- Specifications are subject to change without prior notice.
- The contents of this catalogue are accurate as of August 2023.
- Due to printing considerations, actual colours may vary slightly from those shown.
- All graphics are provided solely for the purpose of illustrating a point.

Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for damage or deterioration in safety due to usage of other refrigerant.

Authorised Dealer

FSV MALAYSIA_AUGUST_2023

Panasonic Air-Conditioning Malaysia (PACMY)

Care Line: +603-7932 4189
Address: Lot 10, Jalan 13/2, 46200 Petaling Jaya,
Selangor Darul Ehsan.

Panasonic

Connect with your smartphone using this QR.

Product information

Technical documents
Download from PRO CLUB

FSV VRF SYSTEMS 2023/2024





NEW FSV EX

COOLING ONLY



FSV

HEAT PUMP



nanoeX INVERTER

QUALITY AIR FOR LIFE


FSV-EX Advantages

The most efficient, powerful and quiet system in Panasonic's history.
There has never been a VRF system like it.
It's the story of a true game changer.



Extraordinary energy-saving performance

The FSV-EX marks a revolutionary step forward in VRF efficiency. A look at the incredible EER value clearly indicates that. What's more, this high EER value is achieved even during part load operation.
This shows the extraordinary energy-saving performance the FSV-EX is capable of providing.

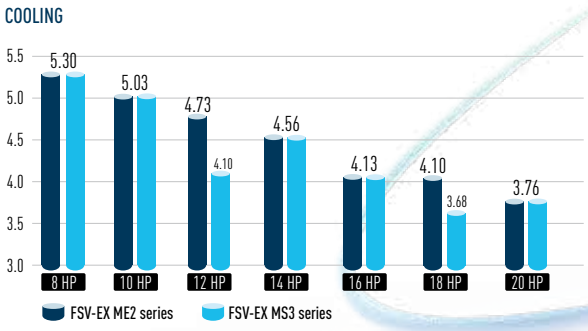


Extraordinary EER throughout the product range

Extraordinary EER in Part load throughout the product range

Extended operation range up to 52°C


The FSV-EX can provide cooling even when the outside temperature reaches a maximum of about 52°C.
And amazingly, it can still operate at 100% capacity when the outside temperature is as high as 43°C.
This high power capability enables reliable operation even under extremely high temperature conditions.

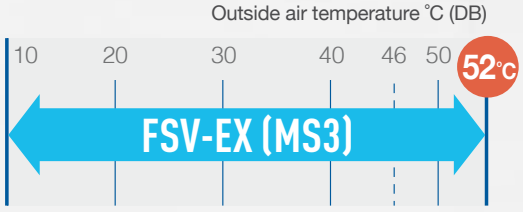



Low-noise operation


Numerous technological innovations, including an improved compressor and a newly designed bell mouth and larger fan, have dramatically reduced the outdoor noise level. The result is an even more comfortable building environment.

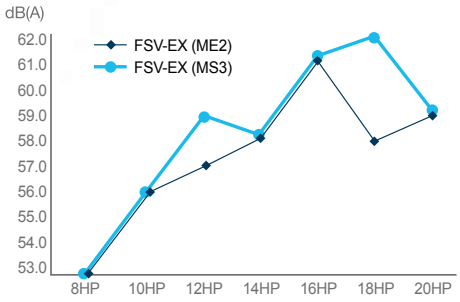

Multiple large-capacity all inverter twin rotary compressor


(more than 14HP)

Two independently controlled inverter compressors achieve high efficiency. Redesigned components in the body provide performance improvement especially in the rated cooling condition and EER performance.

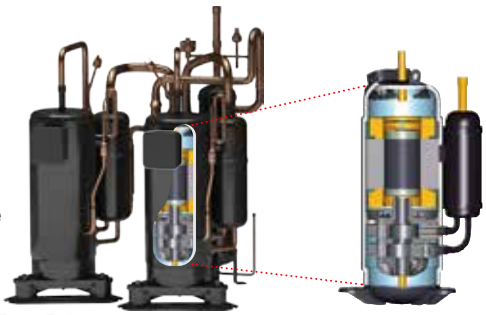

Enlarged heat exchanger surface area with triple surface*

The new heat exchanger features a triple-surface construction. Compared to the divided dual-surface construction in current models, there is no division of space and the area for heat exchange is larger. Also, highly efficient piping pattern increases heat exchange performance by 5%.

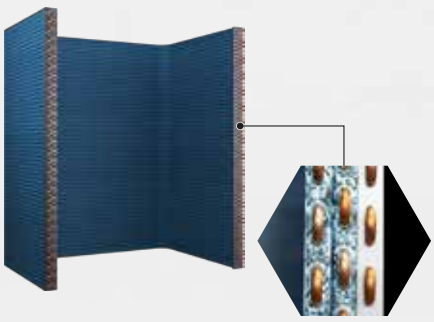


* For 8,10,12HP unit, the heat exchanger is 2 row design.

Panasonic VRF: Top In Comfort

Energy savings × Comfortable air conditioning ~Variable Evaporation Temperature (VET)~

Since 2006, all Panasonic VRF systems have included special VET technology, with variable refrigerant temperature, as standard. Our 'smart logic' system checks the temperature every 30 seconds, automatically adjusting the refrigerant temperature according to actual demand and outdoor conditions.

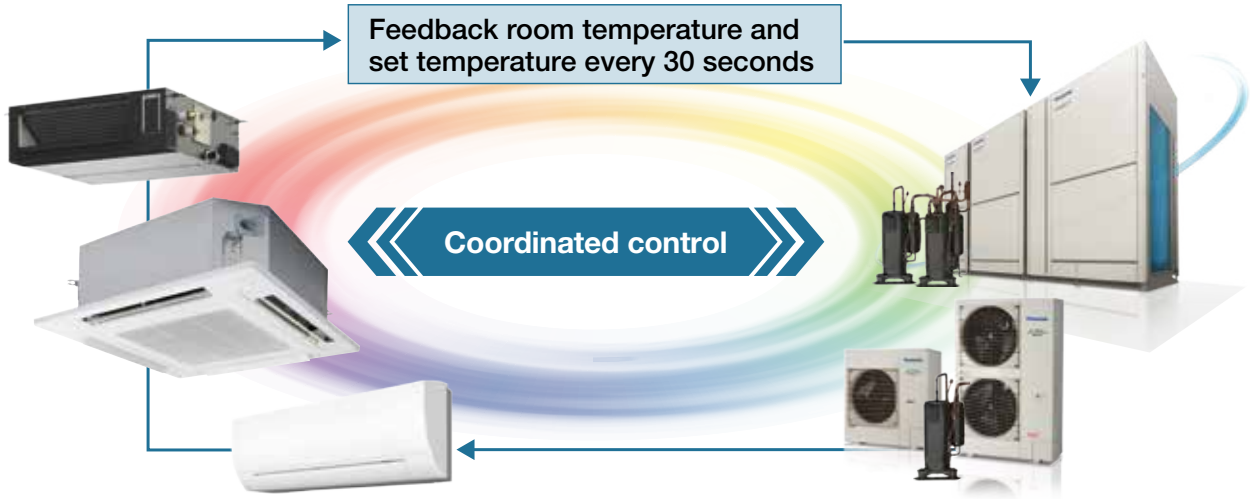

Calculate indoor refrigerant temperature and control the airflow automatically based on the difference between the setting temperature and actual indoor temperature.

* When fan speed is Auto.

Determine system refrigerant temperature and control compressor speed.


Achieves room-by-room comfort and overall system energy savings by controlling optimal refrigerant temperature and circulation volume based on all information of the entire system.

Outdoor unit


The evaporation temperature information required for all indoor units in the system is consolidated for optimal refrigerant temperature control.

Indoor unit

Based on the suction temperature, the amount of circulation refrigerant volume required for the cooling load is controlled by the expansion valve of each indoor unit.

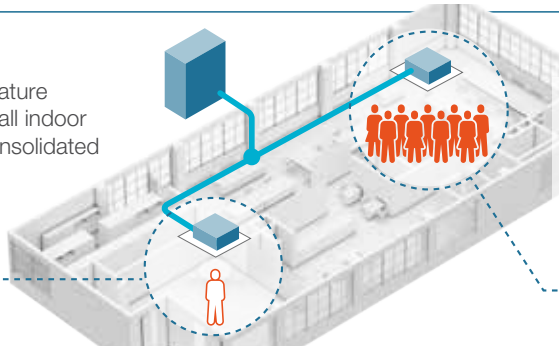


Cooling load : Low area

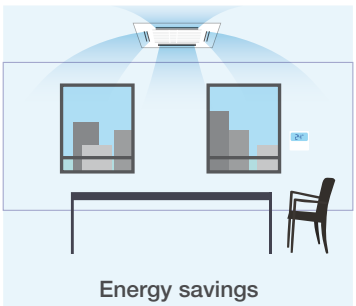

Energy savings

High	Refrigerant evaporation temp.	Low
Less	Circulation refrigerant volume	Many
High	Indoor unit discharge temp.	Low
Low	Indoor unit air flow	Powerful

Cooling load : High area

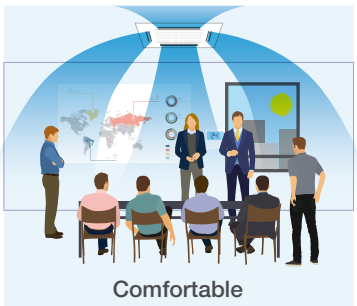


Comfortable


Combination of VET technology and inverter compressor achieves both energy savings and comfort by smoothly controlling the compressor to match the air conditioning load without stopping the compressor for optimum performance.

Image of room temperature change during cooling operation by scene.

1) Normal environment

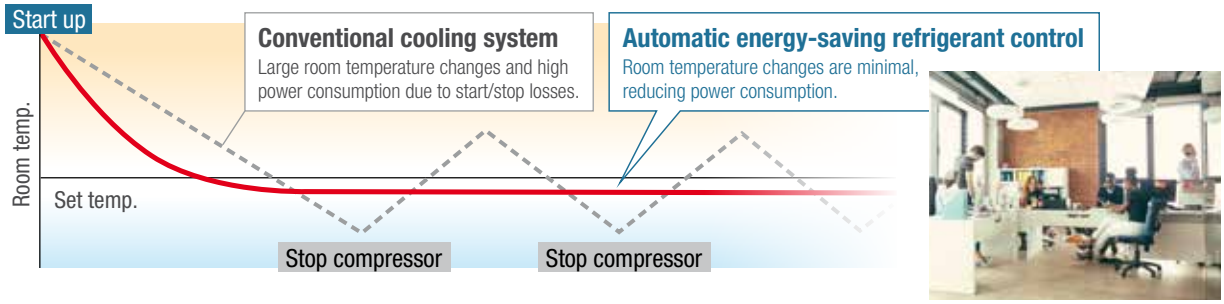

2) Environment with severe cooling load

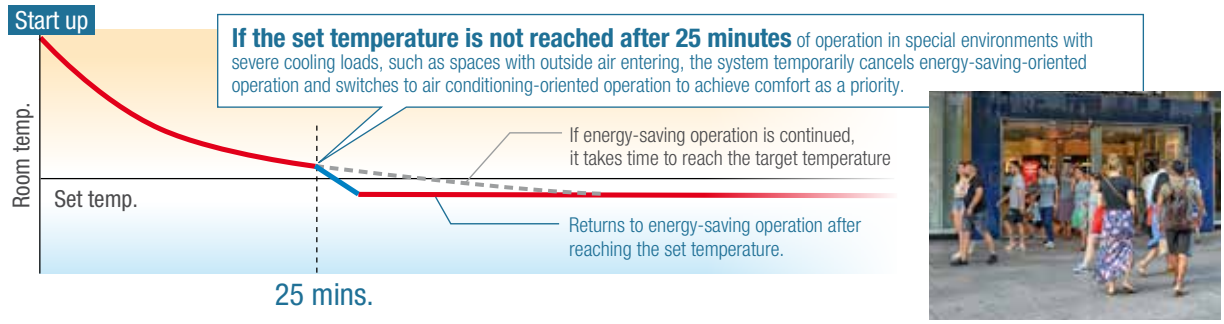



FSV-EX Advantages


Increased piping length for greater design flexibility

MS3

*1: 40 m if the outdoor unit is below the indoor unit. Elevation difference of Max. 90m in case of ODU is higher than IDU may be allowed following certain conditions.
*1, *2: Please consult with Panasonic sales engineers about the certain conditions in case of piping elevation of over 50m or level difference between indoor units over 15m is required.

Adaptable to various building types and sizes
Actual piping length : **200m**
(equivalent piping length : 210m)

Max. total piping length:1,000m

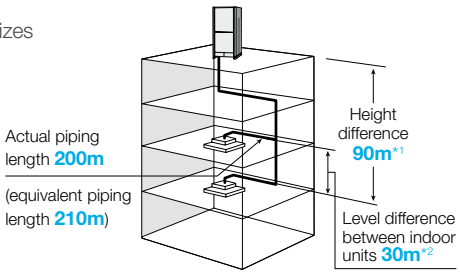

Connectable indoor/outdoor unit capacity ratio up to 130% *1

MS3

FSV systems attain maximum indoor unit connection capacity of up to 130 %*1 of the unit's connection range, depending on the outdoor and indoor models selected. So for a reasonable investment, FSV systems provide an ideal air conditioning solution for locations where full cooling/heating are not always required.

*1 82HP and above is equivalent to 80HP.

SYSTEM / HP	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52
SYSTEM / kW	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0	140.0	145.0
Maximum Number of Connectable Indoor Unit	13	16	19	23	26	29	33	36	40	43	46	50	53	56	59	63	64	64	64	64	64	64	64
Max Connectable IDU Capacity / kW : 130%	29.1	36.4	43.6	52.0	58.5	65.0	72.8	80.0	88.4	94.9	102.1	110.5	117.0	124.8	131.3	139.1	146.9	153.4	161.2	169.0	175.5	182.0	188.5
Max Connectable IDU Capacity / kW : 200%*2	44.8	56.0	67.0	80.0	90.0	100.0	112.0	123.0	136.0	146.0	157.0	170.0	180.0	192.0	202.0	214.0	226.0	236.0	248.0	260.0	270.0	280.0	290.0

SYSTEM / HP	54	56	58	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94	96
SYSTEM / kW	151.0	156.0	162.0	168.0	174.0	180.0	185.0	190.0	196.0	202.0	208.0	213.0	219.0	224.0	232.0	238.0	244.0	249.0	254.0	260.0	266.0	272.0
Maximum Number of Connectable Indoor Unit	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64
Max Connectable IDU Capacity / kW : 130%	196.3	202.8	210.6	218.4	226.2	234.0	240.5	247.0	254.8	262.6	270.4	276.9	284.7	291.2								
Max Connectable IDU Capacity / kW : 200%*2	302.0	312.0	324.0	336.0	348.0	360.0	370.0	380.0	392.0	404.0	416.0	426.0	438.0	448.0								

Note: If more than 100% indoor units are operated with a high load, the units may not perform at the rated capacity. For the details, please consult with an authorised Panasonic dealer

*2 If the following conditions are satisfied, the effective range is "Max connectable IDU capacity / kW (with below "condition) figures" written in above No.2.
i) Obey the limited number of connectable indoor units.
ii) Simultaneous operation is limited to less than "Max connectable IDU capacity / kW (without condition) figures" written in above No.1.


Wide operating range

MS3

- Cooling operation is possible when outdoor temperature as low as 10°C DB
- Cooling operation is possible when outdoor temperature as high as 52°C DB

The remote controller temperature can be set from 18°C up to 30°C (Cooling)

* Depending on the type of remote controller.

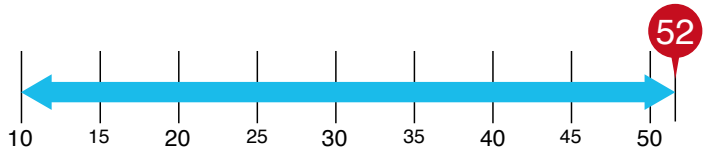

Cooling: 10°C DB ~ 52°C DB

* For further information please refer to the capacity tables in the Technical Data Book.


High external static pressure on condensers

MS3


With a newly designed fan, fan guard, motor, and casing, new models can be custom-installed on-site to provide up to 80 Pa of external static pressure. An air discharge duct prevents shortages of air circulation, allowing outdoor units to be installed on every floor of a building.



Fan




Fan Motor and Casing

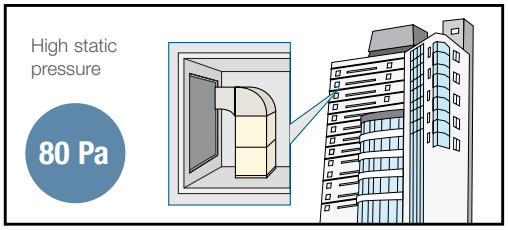

Prevents unit stoppages due to short circuits caused by geckos MS3

One of the common causes of failures of the outdoor unit is electrical short circuits caused by geckos, small animals such as rats and insects entering the unit. The unit eliminates gaps that prevent geckos from entering the internal PCB and thus prevent operation stoppages.


Change Slit

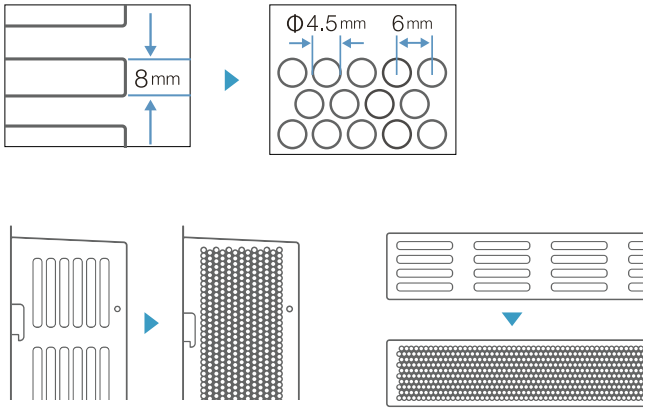



Excellent energy savings MS3

The operation efficiency has been improved using highly efficient R410A refrigerant, new DC inverter compressor, and new heat exchanger design.

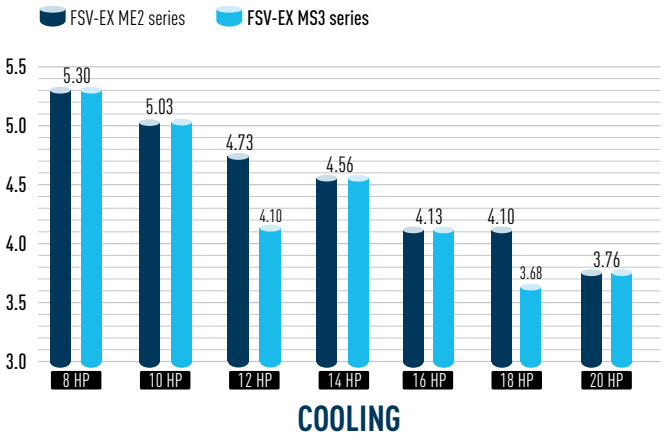

INDEX

2 FSV-EX Advantages
4 Panasoinc VRF: Top In Comfort
6 FSV-EX Advantages
8 Air Handling Unit Kit
10 CAC (Commercial Air Conditioning) Design Support Software
12 FSV Systems
14 2-WAY FSV-EX MS3 Series
20 2-WAY Mini-FSV LE Series
26 nanoe™ X
28 CONEX
30 Indoor Units
50 Smart Connectivity and Control Solutions
52 Panasonic Comfort Cloud
54 VRF Smart Connectivity+
58 Panasonic AC Smart Cloud
60 FSV Controllers
62 P-AIMS
63 Intelligent Controller
64 Panasonic VRF Global Project References

Air Handling Unit Kit

AHU Kit connects FSV-EX and FSV outdoor units to Air Handling Units System



If you require this fresh air solution, please contact an authorized Panasonic distributor.

Connect Air Handling Unit to your FSV-EX and FSV systems for a high efficiency operation.

Application: Hotels, offices, server rooms or all large buildings where air quality control such as humidity control and fresh air are needed.

Project References

Office

Hong Kong
Red Cross Headquaters



Air Conditioning System:
VRF 2-way FSV ME1 series:
2 systems
Indoor Units: 2 units
AHU Kit: 6 units
Cooling Capacity: 280 kW / 80 USRT



Residential + Commercial

Malaysia Utropolis, Glenmarie



Air Conditioning System:
VRF 2-way FSV ME1 series:
29 systems
Indoor Units: 168 units
AHU Kit: 9 units
Cooling Capacity: 3,077 kW / 875 USRT



Air Handling Unit Kit to connect to your ventilation system

AHU Connection Kit

PCB, Power trans, Terminal block



Remote control can be easily installed on the AHU Kit box.
(Remote control must be purchase separately.)



Expansion valve



Thermistor x2 (Refrigerant: E1, E3)



Thermistor x2 (Air: Tf, Tb)



Optional remote controller

Timer remote controller.
CZ-RTC4



Optional parts: Following functions are available by using different type of control accessories:

CZ-RTC4 Wired remote controller
- Operation-ON/OFF
- Mode select
- Temperature setting
  * Fan operation signal can be taken from the PCB.


T10 terminal
- Input signal= Operation ON/OFF
- Remote controller prohibition
- Output signal= Operating-ON status
- Alarm output (by DC12 V)

OPTION terminal, DC12V outlet
- Output signal= Cool / Heat/Fan status
- Defrost
- Thermostat-ON

CZ-CAPBC2 Seri-para I/O unit for each indoor unit
- Temperature setting by 0-10 V or 0-140 Ω input signal
- Room (inlet air) temp outlet by 4-20 mA
- Mode select or/and ON/OFF control
- Fan operation control
- Operation status output/ Alarm output


Technical Zoom
- Max. piping length: 100m (actual)/ 120m (equivalent)
- Difference between longest and shortest piping from first branch: 10m
- Max. length of branch tubing: 12m
  * Other conditions to be referred the standard piping design regulations.
- Available temperature range in Heating: -20 °C (WB)~15 °C (WB)
- Available temperature range for the suction air at AHU Kit: Cool: 18~32 °C / Heat: 16~30 °C

CZ-280MAH1 // CZ-560MAH1
- The system controlled by the suction air (or return air from room) temperature as same as standard indoor unit. (Selectable mode: Automatic / Cooling / Heating / Fan / Dry (but same as Cool)
- The discharge air temperature is also controlled to prevent too-low air discharge in Cooling or too-high air discharge in Heating. (in case of VRF system)
- Demand control (Forcible thermostat-OFF control by operating current)
- Defrost operation signal, Thermo-ON/OFF states output
- External target temperature setting via Indoor/Outdoor signal interface is available with CZ-CAPBC2. (Ex. 0 – 10 V)
- Connectable with P-LINK system

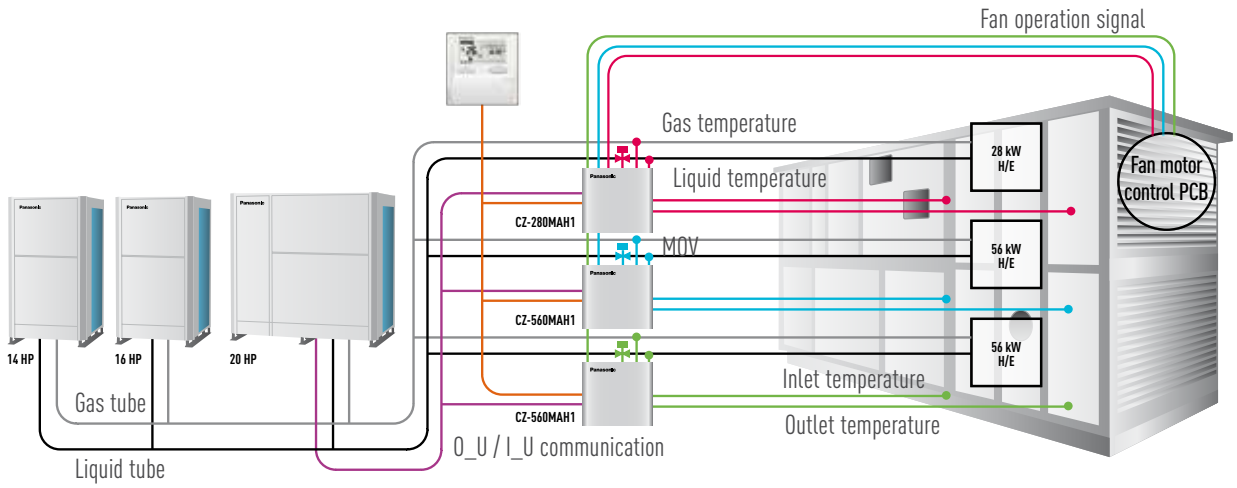

System and regulations. System overview

A: AHU Kit controller box (with control PCB)
B: AHU equipment (Field supplied)
C: Remote controller (option parts)
D: Outdoor unit
E: Gas piping (Field supplied)
F: Liquid piping (Field supplied)
G: Electronic expansion valve
H: Thermistor for gas pipe (E3)
I : Thermistor for liquid pipe (E1)
J : Thermistor for suction air (TA)
K: Thermistor for discharge air (BL)
L : Inter unit wiring
M: Magnetic relay for operating the blower (Field supplied)

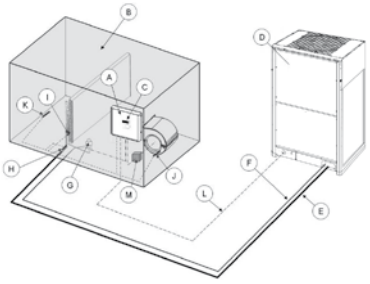

AHU Connection Kit / System Combination

	Capacity (HP)	Outdoor unit combination				AHU kit combination				
2-WAY FSV-EX MS3 Series (Space-saving Combination)	28.0 kW (10 HP)	U-10MS3H7				CZ-280MAH1				
	56.0 kW (20 HP)	U-20MS3H7				CZ-560MAH1				
	85.0 kW (30 HP)	U-12MS3H7	U-18MS3H7			CZ-560MAH1	CZ-280MAH1			
	113.0 kW (40 HP)	U-16MS3H7	U-24MS3H7			CZ-560MAH1	CZ-560MAH1			
	140.0 kW (50 HP)	U-8MS3H7	U-18MS3H7	U-24MS3H7		CZ-560MAH1	CZ-560MAH1	CZ-280MAH1		
	168.0 kW (60 HP)	U-12MS3H7	U-24MS3H7	U-24MS3H7		CZ-560MAH1	CZ-560MAH1	CZ-560MAH1		
	196.0 kW (70 HP)	U-22MS3H7	U-24MS3H7	U-24MS3H7		CZ-560MAH1	CZ-560MAH1	CZ-560MAH1	CZ-280MAH1	
	224.0 kW (80 HP)	U-8MS3H7	U-24MS3H7	U-24MS3H7	U-24MS3H7	CZ-560MAH1	CZ-560MAH1	CZ-560MAH1	CZ-560MAH1	
	252.0 kW (90HP)	U-18MS3H7	U-24MS3H7	U-24MS3H7	U-24MS3H7	CZ-560MAH1	CZ-560MAH1	CZ-560MAH1	CZ-560MAH1	CZ-280MAH1

* These are preliminary. Please consult with Panasonic sales engineers.


CAC Design Support Software

Panasonic VRF DESIGNER




Features the unique Drawing Capture Mode function providing More thorough spec-in and tender quotation support for easier, Faster completion of work.

Drawing Capture Mode Diagram

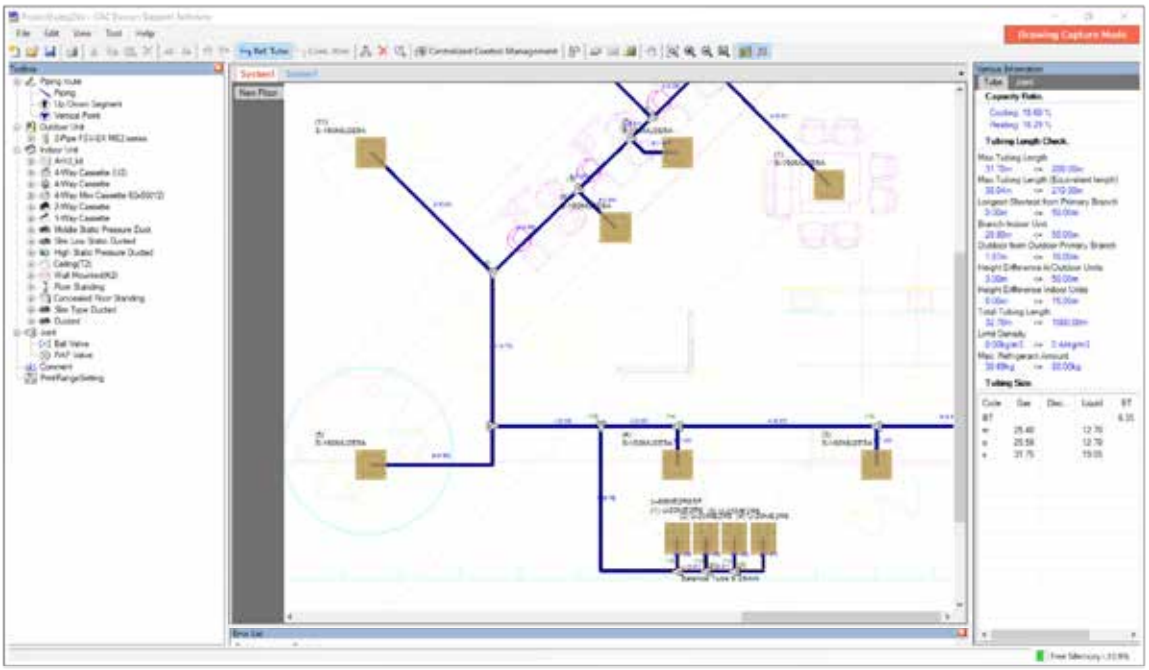



Schematic Mode Diagram

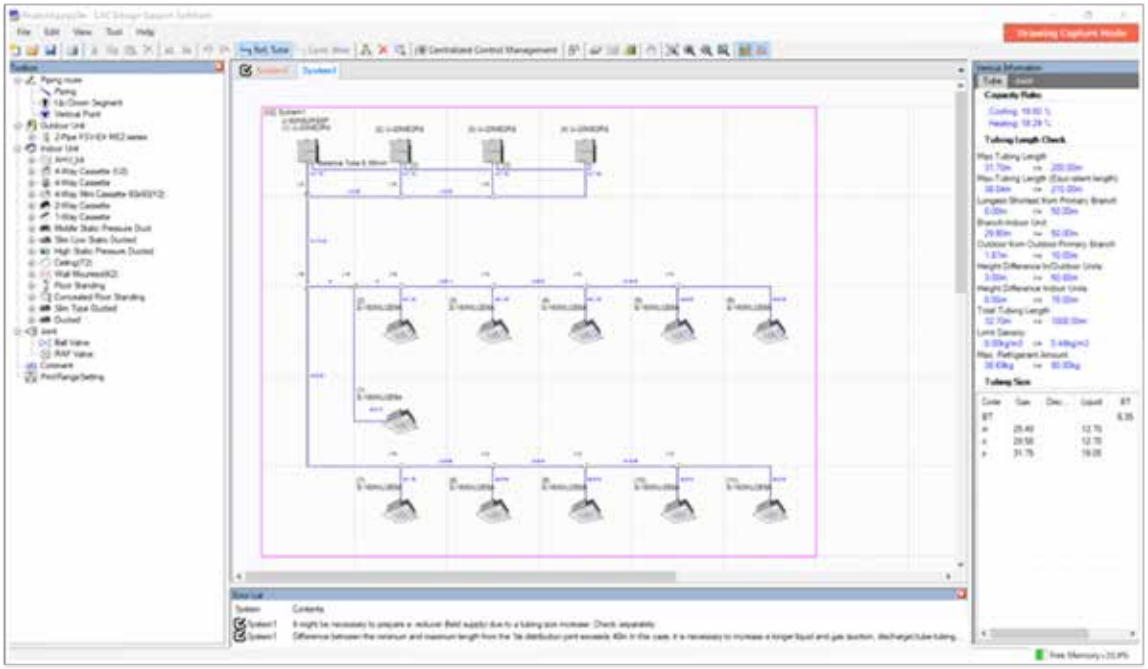


The Panasonic CAC Design Support software can be used for all Panasonic FSV

Panasonic has identified the importance of ever-increasing demands for fast and accurate responses to customer requests in our industry. More and more emphasis is being placed upon energy-efficiency in our marketplace. The ability to calculate cooling/heating loads and produce information of actual design conditions is a major advantage to any architect, consultant, contractor or end user. Panasonic understands the time-poor and demanding industry we are in and we are pleased to announce the launch of the next generation of our system design software program. The Panasonic CAC Design Support Software has been customized to make the selection and design process as quick and easy as possible. The design package utilizes system wizards and import tools to enable both simple and complex systems to be created. In addition, the system will allow outdoor and indoor units to be dragged on an interactive desktop. This allows users to create everything from realistic floor plans with detailed piping and wiring schematics to send out with quotations, through to installation guidance drawings.

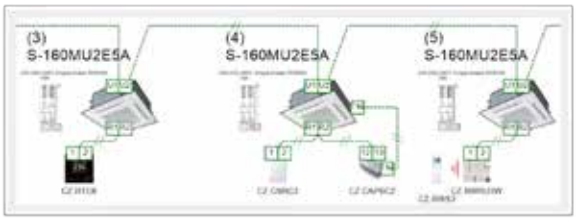

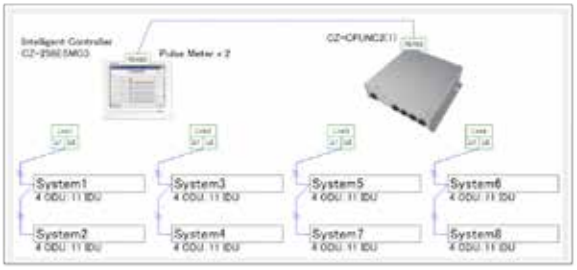

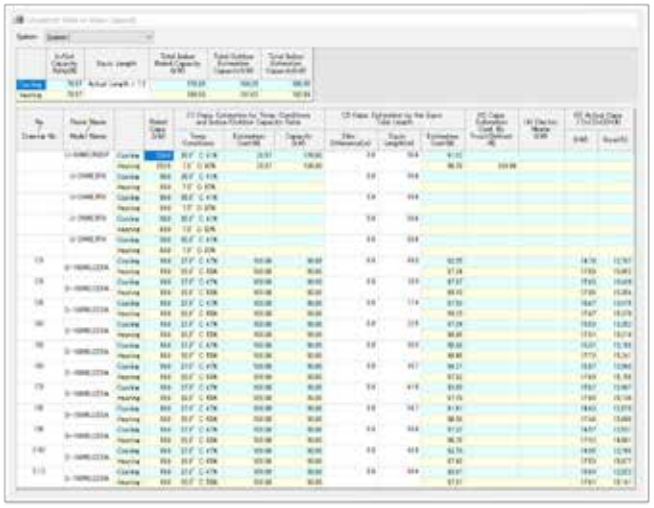

Features

- Drawing Capture mode
  Design selection from building floor drawing.
- Any kind of drawing format. (.pdf, .dxf, .dwg, etc.)
- Conventional Schematic diagram.
- Easy to use system wizards.
- Converted duties for conditions and pipework.
- Auto(CAD) [.dxf/.dwg], Excel and PDF export.
- Detailed wiring and pipework diagrams with advising terminal number.

FSV Systems

FSV systems are designed for energy savings, high efficiency, and high durability with strong cooling power even operating at high ambient temperature.
Panasonic continuously apply advanced technologies to meet the requirements of diverse situations and contribute to the creation of comfortable living spaces.

2-WAY FSV-EX MS3 Series

Cooling-only model with space-saving system and high capacity

NEW

Space-saving Combination Model

Cooling only Type

- Wide range of systems from 8HP to 96HP
- Class-leading EER of 5.3 (for 8HP model)
- Industry-leading low noise of 53.0 DB (8HP model)
- Cooling operation possible with outdoor temperature as high as 52°C (DB)
- Long maximum pipe length (up to 1,000 m)
- Up to 64 indoor units connectable
- External static pressure of 80 Pa



High Efficiency Combination Model

Cooling only Type

- Wide range of systems from 8HP to 64HP
- Class-leading EER of 5.3 (for 8HP model)
- Higher EER than the Space-saving Combination Model
  e.g., a combination of two 10HP units delivering 20HP reduces compressor load.





FSV INVERTER HEAT PUMP

Industry Top Class EER/COP

2-WAY Mini-FSV LE2 Series

For small-scale commercial and residential use

Cooling or Heating Type 1/3-phase

4/5/6 HP High-Durability Model

- High external static pressure 35Pa
- Wide operation range: Cooling: -10°C to 46°C DB, Heating at: -20°C to 18°C WB
- Refrigerant chargeless up to 50m
- Extraordinary energy saving: 5.08* EER for 4HP model
- Demand response (Peak cut) by optional parts.
- Maximum number of connectable indoor units : 9*
- Diversity ratio 50-130%
- DC inverter technology combined with R410A for excellent efficiency
- Demand response (Peak cut) by optional parts.
- One ampere starting current
- Full range of indoor units and control options
- Auto restart from outdoor unit
- Hi-durability outdoor unit model is available.
- Suitable for R22 renewal projects RENEWAL R22

* 6 HP only; 4 HP for 7 units, 5 HP for 8 units.



FSV INVERTER HEAT PUMP

Industry Top Class EER/COP

2-WAY Mini-FSV LE1 Series

For small-scale commercial and residential use

Cooling or Heating Type 3-phase

8/10 HP High-Durability Model

- High external static pressure 35Pa
- Wide operation range: Cooling: -10°C to 46°C DB, Heating at: -20°C to 18°C DB
- Maximum number of connectable indoor units : 13
- Diversity ratio 50-130%
- DC inverter technology combined with R410A for excellent efficiency
- Actual piping length: 150m (Total piping length: 300m)
- System difference of elevation:50m /40m (outdoor above/below)
- Difference in elevation between indoor units:15m
- Demand response (Peak cut) by optional parts.
- One ampere starting current
- Full range of indoor units and control options
- Auto restart from outdoor unit
- Hi-durability outdoor unit model is available.
- Suitable for R22 renewal project RENEWAL R22



2-WAY Cooling Only FSV-EX MS3 Series HIGH EFFICIENCY COMBINATION MODEL

Appearance											
HP				**8**	**10**	**12**	**14**	**16**	**18**	**20**	**22**	**24**
									U-18MS3H7HE	**U-20MS3H7HE**	**U-22MS3H7HE**	**U-24MS3H7HE**
Model name				**U-8MS3H7**	**U-10MS3H7**	**U-12MS3H7**	**U-14MS3H7**	**U-16MS3H7**	**U-8MS3H7 U-10MS3H7**	**U-10MS3H7 U-10MS3H7**	**U-10MS3H7 U-12MS3H7**	**U-12MS3H7 U-12MS3H7**
Power supply				380/400/415V/3-phase/50Hz 380/400V/3-phase/60Hz								
Capacity	Cooling		kW	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0
			BTU/h	76,500	95,600	114,300	136,500	153,600	170,600	191,100	209,900	232,100
EER / COP	Cooling		W/W	5.30	5.03	4.10	4.56	4.13	5.15	5.05	4.49	4.07
Dimensions	H x W x D		mm	1,842 x 770 x 1,000	1,842 x 770 x 1,000	1,842 x 770 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,600 x 1,000	1,842 x 1,600 x 1,000	1,842 x 1,600 x 1,000	1,842 x 1,600 x 1,000
Net weight			kg	210	210	210	313	313	420	420	420	420
Electrical ratings	Cooling	Running current	A	7.14 / 6.78 / 6.54	9.62 / 9.14 / 8.81	13.6 / 13.0 / 12.5	15.3 / 14.5 / 14.0	18.4 / 17.5 / 16.8	16.6 / 15.7 / 15.2	19.2 / 18.2 / 17.5	23. 1/ 22.0 / 21.2	27.9 / 26.5 / 25.5
		Power input	kW	4.23	5.57	8.17	8.77	10.9	9.70	11.1	13.7	16.7
Starting current			A	1	1	1	2	2	2	2	2	2
Air flow rate			m³/h	13,440	13,440	13,440	13,920	13,920	26,880	26,880	26,880	26,880
			L/s	3,733	3,733	3,733	3,867	3,867	7,467	7,467	7,467	7,467
Refrigerant amount at shipment			kg	5.6	5.6	5.6	8.3	8.3	11.2	11.2	11.2	11.2
External static pressure			Pa	80	80	80	80	80	80	80	80	80
Piping connections	Gas pipe		mm (inches)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)
	Liquid pipe		mm (inches)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
	Balance pipe		mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Ambient temperature operating range				Cooling: 10˚C (DB)~ +52˚C (DB)								
Sound pressure level	Normal mode		dB (A)	53.0	56.0	59.0	58.0	61.0	58.0	59.0	61.0	62.0
	Silent mode (2)		dB (A)	48.0	51.0	54.0	53.0	56.0	53.0	54.0	56.0	57.0
Sound power level	Normal mode		dB	74.0	77.0	80.0	79.0	82.0	79.0	80.0	82.0	83.0

Appearance										
HP				**54**	**56**	**58**	**60**	**62**	**64**	
				U-54MS3H7HE	**U-56MS3H7HE**	**U-58MS3H7HE**	**U-60MS3H7HE**	**U-62MS3H7HE**	**U-64MS3H7HE**	
Model name				**U-10MS3H7 U-12MS3H7 U-16MS3H7 U-16MS3H7**	**U-12MS3H7 U-12MS3H7 U-16MS3H7 U-16MS3H7**	**U-10MS3H7 U-16MS3H7 U-16MS3H7 U-16MS3H7**	**U-12MS3H7 U-16MS3H7 U-16MS3H7 U-16MS3H7**	**U-14MS3H7 U-16MS3H7 U-16MS3H7 U-16MS3H7**	**U-16MS3H7 U-16MS3H7 U-16MS3H7 U-16MS3H7**	
Power supply				380/400/415V/3-phase/50Hz 380/400/3-phase/60Hz						
Capacity	Cooling		kW	151.0	156.0	162.0	168.0	174.0	180.0	
			BTU/h	515,400	532,400	552,900	573,400	593,900	614,300	
EER / COP	Cooling		W/W	4.27	4.13	4.27	4.13	4.23	4.13	
Dimensions	H x W x D		mm	1,842 x 4,080 x 1,000	1,842 x 4,080 x 1,000	1,842 x 4,490 x 1,000	1,842 x 4,490 x 1,000	1,842 x 4,900 x 1,000	1,842 x 4,900 x 1,000	
Net weight			kg	1,046	1,046	1,149	1,149	1,252	1,252	
Electrical ratings	Cooling	Running current	A	59.8 / 56.8 / 54.7	63.8 / 60.6 / 58.4	64.0 / 60.8 / 58.6	68.7 / 65.3 / 62.9	70.2 / 66.7 / 64.2	73.6 / 69.9 / 67.4	
		Power input	kW	35.4	37.8	37.9	40.7	41.1	43.6	
Starting current			A	6	6	7	7	8	8	
Air flow rate			m³/h	54,720	54,720	55,200	55,200	55,680	55,680	
			L/s	15,200	15,200	15,333	15,333	15,467	15,467	
Refrigerant amount at shipment			kg	27.8	27.8	30.5	30.5	33.2	33.2	
External static pressure			Pa	80	80	80	80	80	80	
Piping connections	Gas pipe		mm (inches)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	
	Liquid pipe		mm (inches)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	
	Balance pipe		mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	
Ambient temperature operating range				Cooling: 10˚C (DB)~ +52˚C (DB)						
Sound pressure level	Normal mode		dB (A)	66.0	66.0	66.0	67.0	66.0	67.0	
	Silent mode (2)		dB (A)	61.0	61.0	61.0	62.0	61.0	62.0	
Sound power level	Normal mode		dB	87.0	87.0	87.0	88.0	87.0	88.0	

GLOBALREMARKS

Rated conditions:	Cooling
Indoor air temperature	27˚C DB / 19˚C WB
Outdoor air temperature	35˚C DB

These specifications are subject to change without notice.



U-8MS3H7
U-10MS3H7
U-12MS3H7



U-14MS3H7
U-16MS3H7


26	28	30	32	34	36	38	40	42	44	46	48	50	52
U-26MS3H7HE	U-28MS3H7HE	U-30MS3H7HE	U-32MS3H7HE	U-34MS3H7HE	U-36MS3H7HE	U-38MS3H7HE	U-40MS3H7HE	U-42MS3H7HE	U-44MS3H7HE	U-46MS3H7HE	U-48MS3H7HE	U-50MS3H7HE	U-52MS3H7HE
U-10MS3H7 U-16MS3H7	U-12MS3H7 U-16MS3H7	U-14MS3H7 U-16MS3H7	U-16MS3H7 U-16MS3H7	U-10MS3H7 U-12MS3H7 U-12MS3H7	U-12MS3H7 U-12MS3H7 U-12MS3H7	U-10MS3H7 U-12MS3H7 U-16MS3H7	U-12MS3H7 U-12MS3H7 U-16MS3H7	U-10MS3H7 U-16MS3H7 U-16MS3H7	U-12MS3H7 U-16MS3H7 U-16MS3H7	U-14MS3H7 U-16MS3H7 U-16MS3H7	U-16MS3H7 U-16MS3H7 U-16MS3H7	U-10MS3H7 U-12MS3H7 U-12MS3H7 U-16MS3H7	U-12MS3H7 U-12MS3H7 U-12MS3H7 U-16MS3H7
380/400/415V/3-phase/50Hz 380/400V/3-phase/60Hz													
73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0	140.0	145.0
249,100	267,900	290,100	307,200	327,600	344,700	365,200	385,700	402,700	423,200	443,700	460,800	477,800	494,900
4.42	4.11	4.31	4.13	4.30	4.09	4.31	4.09	4.31	4.11	4.25	4.13	4.27	4.12
1,842 x 2,010 x 1,000	1,842 x 2,010 x 1,000	1,842 x 2,420 x 1,000	1,842 x 2,420 x 1,000	1,842 x 2,430 x 1,000	1,842 x 2,430 x 1,000	1,842 x 2,840x 1,000	1,842 x 2,840 x 1,000	1,842 x 3,250 x 1,000	1,842 x 3,250 x 1,000	1,842 x 3,660 x 1,000	1,842 x 3,660 x 1,000	1,842 x 3,670 x 1,000	1,842 x 3,670 x 1,000
523	523	626	626	630	630	733	733	836	836	939	939	943	943
28.2 / 26.8 / 25.8	32.2 / 30.6 / 29.5	33.6 / 31.9 / 30.8	36.8 / 35.0 / 33.7	37.6 / 35.8 / 34.5	41.2 / 39.2 / 37.8	41.9 / 39.8 / 38.3	46.1 / 43.8 / 42.2	46.3 / 43.9 / 42.4	51.0 / 48.4 / 46.7	52.2 / 49.6 / 47.8	55.2 / 52.4 / 50.5	55.4 / 52.6 / 50.7	58.8 / 55.8 / 53.8
16.5	19.1	19.7	21.8	22.3	24.7	24.8	27.6	27.4	30.2	30.6	32.7	32.8	35.2
3	3	4	4	3	3	4	4	5	5	6	6	5	5
27,360	27,360	27,840	27,840	40,320	40,320	40,800	40,800	41,280	41,280	41,760	41,760	54,240	54,240
7,600	7,600	7,733	7,733	11,200	11,200	11,333	11,333	11,467	11,467	11,600	11,600	15,067	15,067
13.9	13.9	16.6	16.6	16.8	16.8	19.5	19.5	22.2	22.2	24.9	24.9	25.1	25.1
80	80	80	80	80	80	80	80	80	80	80	80	80	80
Ø34.92 (Ø1-3/8)	Ø34.92 (Ø1-3/8)	Ø34.92 (Ø1-3/8)	Ø34.92 (Ø1-3/8)	Ø34.92 (Ø1-3/8)	Ø41.28 (Ø1-5/8))	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8))	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)
Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)
Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Cooling: 10℃ (DB)~ +52℃ (DB)													
62.0	63.0	63.0	64.0	63.0	64.0	64.0	65.0	65.0	65.0	65.0	66.0	65.0	66.0
57.0	58.0	58.0	59.0	58.0	59.0	59.0	60.0	60.0	60.0	60.0	61.0	60.0	61.0
83.0	84.0	84.0	85.0	84.0	85.0	85.0	86.0	86.0	86.0	86.0	87.0	86.0	87.0

8 / 10 / 12 HP


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

A: (Installation hole pitch) For removing tube forward
B: (Installation hole pitch) For removing the downward
C: (Installation hole pitch)

Top view



Front view

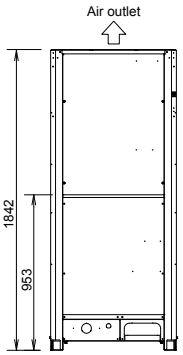


unit: mm

14 / 16 HP


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

A: (Installation hole pitch) For removing tube forward
B: (Installation hole pitch) For removing the downward
C: (Installation hole pitch)

Top view



Front view

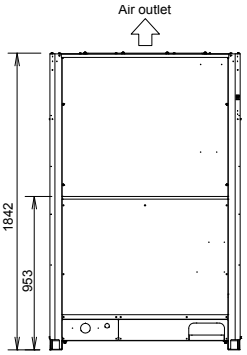

unit: mm

2-WAY Cooling Only FSV-EX MS3 Series

SPACE SAVING COMBINATION MODEL

Appearance												
HP				**8**	**10**	**12**	**14**	**16**	**18**	**20**	**22**	**24**
Model name				**U-8MS3H7**	**U-10MS3H7**	**U-12MS3H7**	**U-14MS3H7**	**U-16MS3H7**	**U-18MS3H7**	**U-20MS3H7**	**U-22MS3H7**	**U-24MS3H7**
Power supply				380/400/415V/3-phase/50Hz 380/400V/3-phase/60Hz								
Capacity	Cooling		kW	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0
			BTU/h	76,500	95,600	114,300	136,500	153,600	170,600	191,100	209,900	232,100
EER / COP	Cooling		W/W	5.30	5.03	4.10	4.56	4.13	3.68	3.76	3.60	3.42
Dimensions	H x W x D		mm	1,842 x 770 x 1,000	1,842 x 770 x 1,000	1,842 x 770 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,540 x 1,000	1,842 x 1,540 x 1,000	1,842 x 1,540 x 1,000
Net weight			kg	210	210	210	313	313	313	366	366	366
Electrical ratings	Cooling	Running current	A	7.14 / 6.78 / 6.54	9.62 / 9.14 / 8.81	13.6 / 13.0 / 12.5	15.3 / 14.5 / 14.0	18.4 / 17.5 / 16.8	23.0 / 21.8 / 21.0	24.6 / 23.4 / 22.5	28.2 / 26.8 / 25.9	32.8 / 31.2 / 30.1
		Power input	kW	4.23	5.57	8.17	8.77	10.9	13.6	14.9	17.1	19.9
Starting current			A	1	1	1	2	2	2	2	2	2
Air flow rate			m³/h	13,440	13,440	13,440	13,920	13,920	13,920	24,300	24,300	24,300
			L/s	3,733	3,733	3,733	3,867	3,867	3,867	6,750	6,750	6,750
Refrigerant amount at shipment			kg	5.6	5.6	5.6	8.3	8.3	8.3	9.5	9.5	9.5
External static pressure			Pa	80	80	80	80	80	80	80	80	80
Piping connections	Gas pipe		mm (inches)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)
	Liquid pipe		mm (inches)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
	Balance pipe		mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Ambient temperature operating range				Cooling: 10℃ (DB)~ +52℃ (DB)								
Sound pressure level	Normal mode		dB (A)	53.0	56.0	59.0	58.0	61.0	62.0	59.0	60.0	60.0
	Silent mode (2)		dB (A)	48.0	51.0	54.0	53.0	56.0	57.0	54.0	55.0	55.0
Sound power level	Normal mode		dB	74.0	77.0	80.0	79.0	82.0	83.0	80.0	81.0	81.0

Appearance												
HP				**50**	**52**	**54**	**56**	**58**	**60**	**62**	**64**	**66**
				U-50MS3H7SP	**U-52MS3H7SP**	**U-54MS3H7SP**	**U-56MS3H7SP**	**U-58MS3H7SP**	**U-60MS3H7SP**	**U-62MS3H7SP**	**U-64MS3H7SP**	**U-66MS3H7SP**
Model name				**U-8MS3H7 U-18MS3H7 U-24MS3H7**	**U-10MS3H7 U-18MS3H7 U-24MS3H7**	**U-12MS3H7 U-18MS3H7 U-24MS3H7**	**U-8MS3H7 U-24MS3H7 U-24MS3H7**	**U-10MS3H7 U-24MS3H7 U-24MS3H7**	**U-12MS3H7 U-24MS3H7 U-24MS3H7**	**U-14MS3H7 U-24MS3H7 U-24MS3H7**	**U-16MS3H7 U-24MS3H7 U-24MS3H7**	**U-18MS3H7 U-24MS3H7 U-24MS3H7**
Power supply				380/400/415V/3-phase/50Hz 380/400/3-phase/60Hz								
Capacity	Cooling		kW	140.0	145.0	151.0	156.0	162.0	168.0	174.0	180.0	185.0
			BTU/h	477,800	494,900	515,400	532,400	552,900	573,400	593,900	614,300	631,400
EER / COP	Cooling		W/W	3.72	3.75	3.65	3.63	3.64	3.55	3.65	3.59	3.50
Dimensions	H x W x D		mm	1,842 x 3,610 x 1,000	1,842 x 3,610 x 1,000	1,842 x 3,610 x 1,000	1,842 x 3,970 x 1,000	1,842 x 3,970 x 1,000	1,842 x 3,970 x 1,000	1,842 x 4,380 x 1,000	1,842 x 4,380 x 1,000	1,842 x 4,380 x 1,000
Net weight			kg	889	889	889	942	942	942	1,045	1,045	1,045
Electrical ratings	Cooling	Running current	A	62.8 / 59.6 / 57.5	64.6 / 61.4 / 59.2	69.1 / 65.7 / 63.3	71.0 / 67.5 / 65.0	73.5 / 69.8 / 67.3	78.1 / 74.2 / 71.5	79.6 / 75.7 / 72.9	82.9 / 78.8 / 75.9	87.4 / 83.0 / 80.0
		Power input	kW	37.6	38.7	41.4	43.0	44.5	47.3	47.7	50.2	52.9
Starting current			A	5	5	5	5	5	5	6	6	6
Air flow rate			m³/h	51,660	51,660	51,660	62,040	62,040	62,040	62,520	62,520	62,520
			L/s	14,350	14,350	14,350	17,233	17,233	17,233	17,367	17,367	17,367
Refrigerant amount at shipment			kg	23.4	23.4	23.4	24.6	24.6	24.6	27.3	27.3	27.3
External static pressure			Pa	80	80	80	80	80	80	80	80	80
Piping connections	Gas pipe		mm (inches)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)
	Liquid pipe		mm (inches)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)
	Balance pipe		mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Ambient temperature operating range				Cooling: 10℃ (DB)~ +52℃ (DB)								
Sound pressure level	Normal mode		dB (A)	64.0	65.0	65.0	63.0	64.0	64.0	64.0	65.0	66.0
	Silent mode (2)		dB (A)	59.0	60.0	60.0	58.0	59.0	59.0	59.0	60.0	61.0
Sound power level	Normal mode		dB	85.0	86.0	86.0	84.0	85.0	85.0	85.0	86.0	87.0


U-8MS3H7
U-10MS3H7
U-12MS3H7


U-14MS3H7
U-16MS3H7
U-18MS3H7


U-20MS3H7
U-22MS3H7
U-24MS3H7

											
26	**28**	**30**	**32**	**34**	**36**	**38**	**40**	**42**	**44**	**46**	**48**
U-26MS3H7SP	**U-28MS3H7SP**	**U-30MS3H7SP**	**U-32MS3H7SP**	**U-34MS3H7SP**	**U-36MS3H7SP**	**U-38MS3H7SP**	**U-40MS3H7SP**	**U-42MS3H7SP**	**U-44MS3H7SP**	**U-46MS3H7SP**	**U-48MS3H7SP**
U-8MS3H7 U-18MS3H7	U-10MS3H7 U-18MS3H7	U-12MS3H7 U-18MS3H7	U-8MS3H7 U-24MS3H7	U-10MS3H7 U-24MS3H7	U-12MS3H7 U-24MS3H7	U-14MS3H7 U-24MS3H7	U-16MS3H7 U-24MS3H7	U-18MS3H7 U-24MS3H7	U-20MS3H7 U-24MS3H7	U-22MS3H7 U-24MS3H7	U-24MS3H7 U-24MS3H7
380/400/415V/3-phase/50Hz 380/400V/3-phase/60Hz											
73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0
249,100	267,900	290,100	307,200	327,600	344,700	365,200	385,700	402,700	423,200	443,700	460,800
4.03	4.05	3.79	3.75	3.76	3.63	3.78	3.67	3.52	3.56	3.49	3.44
1,842 x 2,010 x 1,000	1,842 x 2,010 x 1,000	1,842 x 2,010 x 1,000	1,842 x 2,370 x 1,000	1,842 x 2,370 x 1,000	1,842 x 2,370 x 1,000	1,842 x 2,780 x 1,000	1,842 x 2,780 x 1,000	1,842 x 2,780 x 1,000	1,842 x 3,140 x 1,000	1,842 x 3,140 x 1,000	1,842 x 3,140 x 1,000
523	523	523	576	576	576	679	679	679	732	732	732
30.6 / 29.0 / 28.0	33.1 / 31.5 / 30.3	37.8 / 35.9 / 34.6	39.6 / 37.7 / 36.3	42.6 / 40.4 / 39.0	45.9 / 43.6 / 42.0	47.8 / 45.4 / 43.7	51.4 / 48.9 / 47.1	55.9 / 53.1 / 51.2	57.5 / 54.6 / 52.6	61.4 / 58.4 / 56.3	64.9 / 61.7 / 59.4
18.1	19.4	22.4	24.0	25.5	27.8	28.3	30.8	33.5	34.8	37.2	39.3
3	3	3	3	3	3	4	4	4	4	4	4
27,360	27,360	27,360	37,740	37,740	37,740	38,220	38,220	38,220	48,600	48,600	48,600
7,600	7,600	7,600	10,483	10,483	10,483	10,617	10,617	10,617	13,500	13,500	13,500
13.9	13.9	13.9	15.1	15.1	15.1	17.8	17.8	17.8	19.0	19.0	19.0
80	80	80	80	80	80	80	80	80	80	80	80
Ø34.92 (Ø1-3/8)	Ø34.92 (Ø1-3/8)	Ø34.92 (Ø1-3/8)	Ø34.92 (Ø1-3/8)	Ø34.92 (Ø1-3/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)
Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)
Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Cooling: 10˚C (DB)~ +52˚C (DB)											
63.0	63.0	64.0	61.0	61.0	63.0	62.0	64.0	64.0	63.0	63.0	63.0
58.0	58.0	59.0	56.0	56.0	58.0	57.0	59.0	59.0	58.0	58.0	58.0
84.0	84.0	85.0	82.0	82.0	84.0	83.0	85.0	85.0	84.0	84.0	84.0

											
68	**70**	**72**	**74**	**76**	**78**	**80**	**82**	**84**	**86**	**88**	**90**
U-68MS3H7SP	**U-70MS3H7SP**	**U-72MS3H7SP**	**U-74MS3H7SP**	**U-76MS3H7SP**	**U-78MS3H7SP**	**U-80MS3H7SP**	**U-82MS3H7SP**	**U-84MS3H7SP**	**U-86MS3H7SP**	**U-88MS3H7SP**	**U-90MS3H7SP**
U-20MS3H7 U-24MS3H7 U-24MS3H7	U-22MS3H7 U-24MS3H7 U-24MS3H7	U-24MS3H7 U-24MS3H7 U-24MS3H7	U-8MS3H7 U-18MS3H7 U-24MS3H7 U-24MS3H7	U-10MS3H7 U-18MS3H7 U-24MS3H7 U-24MS3H7	U-12MS3H7 U-18MS3H7 U-24MS3H7 U-24MS3H7	U-8MS3H7 U-24MS3H7 U-24MS3H7 U-24MS3H7	U-10MS3H7 U-24MS3H7 U-24MS3H7 U-24MS3H7	U-12MS3H7 U-24MS3H7 U-24MS3H7 U-24MS3H7	U-14MS3H7 U-24MS3H7 U-24MS3H7 U-24MS3H7	U-16MS3H7 U-24MS3H7 U-24MS3H7 U-24MS3H7	U-18MS3H7 U-24MS3H7 U-24MS3H7 U-24MS3H7
380/400/415V/3-phase/50Hz 380/400/3-phase/60Hz											
190.0	196.0	202.0	208.0	213.0	219.0	224.0	232.0	238.0	244.0	249.0	254.0
648,500	668,900	689,400	709,900	727,000	747,400	764,500	791,800	812,300	832,800	849,800	866,900
3.53	3.49	3.44	3.62	3.64	3.57	3.56	3.56	3.50	3.57	3.53	3.47
1,842 x 4,740 x 1,000	1,842 x 4,740 x 1,000	1,842 x 4,740 x 1,000	1,842 x 5,210 x 1,000	1,842 x 5,210 x 1,000	1,842 x 5,210 x 1,000	1,842 x 5,570 x 1,000	1,842 x 5,570 x 1,000	1,842 x 5,570 x 1,000	1,842 x 5,980 x 1,000	1,842 x 5,980 x 1,000	1,842 x 5,980 x 1,000
1,098	1,098	1,098	1,255	1,255	1,255	1,308	1,308	1,308	1,411	1,411	1,411
88.8 / 84.4 / 81.4	92.8 / 88.2 / 85.0	97.1 / 92.3 / 88.9	95.8 / 91.0 / 87.8	97.7 / 92.8 / 89.4	101.2 / 96.2 / 92.7	103.9 / 98.7 / 95.1	107.7 / 102.3 / 98.6	112.3 / 106.7 / 102.8	114.2 / 108.5 / 104.6	116.4 / 110.6 / 106.6	120.9 / 114.8 / 110.7
53.8	56.2	58.8	57.4	58.5	61.3	62.9	65.2	68.0	68.4	70.5	73.2
6	6	6	7	7	7	7	7	7	8	8	8
72,900	72,900	72,900	75,960	75,960	75,960	86,340	86,340	86,340	86,820	86,820	86,820
20,250	20,250	20,250	21,100	21,100	21,100	23,983	23,983	23,983	24,117	24,117	24,117
28.5	28.5	28.5	32.9	32.9	32.9	34.1	34.1	34.1	36.8	36.8	36.8
80	80	80	80	80	80	80	80	80	80	80	80
Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø53.98 (Ø2-1/8)*	Ø53.98 (Ø2-1/8)*	Ø53.98 (Ø2-1/8)*	Ø53.98 (Ø2-1/8)*	Ø53.98 (Ø2-1/8)*	Ø53.98 (Ø2-1/8)*	Ø53.98 (Ø2-1/8)*	Ø53.98 (Ø2-1/8)*	Ø53.98 (Ø2-1/8)*	Ø53.98 (Ø2-1/8)*
Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)
Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Cooling: 10˚C (DB)~ +52˚C (DB)											
64.0	65.0	65.0	66.0	66.0	66.0	65.0	65.0	66.0	66.0	66.0	67.0
59.0	60.0	60.0	61.0	61.0	61.0	60.0	60.0	61.0	61.0	61.0	62.0
85.0	86.0	86.0	87.0	87.0	87.0	86.0	86.0	87.0	87.0	87.0	88.0

* Additional 30 cc/m oil charge is necessary.

2-WAY Cooling Only FSV-EX MS3 Series

SPACE SAVING COMBINATION MODEL

Appearance						
HP				**92**	**94**	**96**
Model name				**U-92MS3H7SP**	**U-94MS3H7SP**	**U-96MS3H7SP**
				U-20MS3H7 U-24MS3H7 U-24MS3H7 U-24MS3H7	**U-22MS3H7 U-24MS3H7 U-24MS3H7 U-24MS3H7**	**U-24MS3H7 U-24MS3H7 U-24MS3H7 U-24MS3H7**
Power supply				380/400/415V/3-phase/50Hz 380/400/3-phase/60Hz		
Capacity	Cooling		kW	260.0	266.0	272.0
			BTU/h	887,400	907,800	928,300
EER / COP	Cooling		W/W	3.49	3.45	3.42
Dimensions	H x W x D		mm	1,842 x 6,340 x 1,000	1,842 x 6,340 x 1,000	1,842 x 6,340 x 1,000
Net weight			kg	1,464	1,464	1,464
Electrical ratings	Cooling	Running current	A	123.0 / 116.9 / 112.7	127.2 / 120.8 / 116.4	131.3 / 124.7 / 120.2
		Power input	kW	74.5	77.0	79.5
Starting current			A	8	8	8
Air flow rate			m³/h	97,200	97,200	97,200
			L/s	27,000	27,000	27,000
Refrigerant amount at shipment			kg	38.0	38.0	38.0
External static pressure			Pa	80	80	80
Piping connections	Gas pipe		mm (inches)	Ø53.98 (Ø2-1/8)*	Ø53.98 (Ø2-1/8)*	Ø53.98 (Ø2-1/8)*
	Liquid pipe		mm (inches)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)
	Balance pipe		mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Ambient temperature operating range				Cooling: 10℃ (DB)~ +52℃ (DB)		
Sound pressure level	Normal mode		dB (A)	66.0	66.0	66.0
	Silent mode (2)		dB (A)	61.0	61.0	61.0
Sound power level	Normal mode		dB	87.0	87.0	87.0

* Additional 30 cc/m oil charge is necessary.

GLOBALREMARKS

Rated conditions:	Cooling
Indoor air temperature	27℃ DB / 19℃ WB
Outdoor air temperature	35℃ DB


These specifications are subject to change without notice.

8 / 10 / 12 HP


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

A: (Installation hole pitch) For removing tube forward
B: (Installation hole pitch) For removing the downward
C: (Installation hole pitch)

Top view

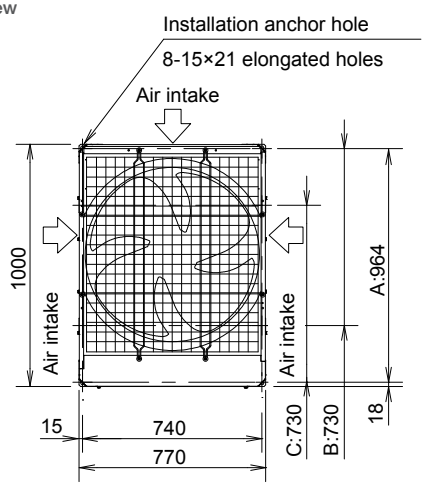

Front view

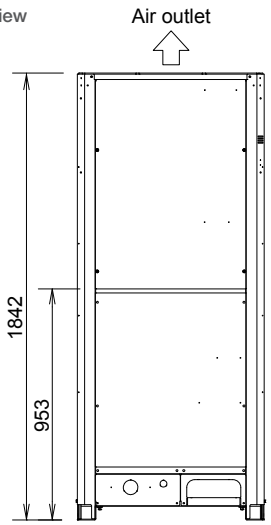

unit: mm



U-8MS3H7
U-10MS3H7
U-12MS3H7



U-14MS3H7
U-16MS3H7
U-18MS3H7




U-20MS3H7
U-22MS3H7
U-24MS3H7

14 / 16 / 18 HP


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

A: (Installation hole pitch) For removing tube forward
B: (Installation hole pitch) For removing the downward
C: (Installation hole pitch)

Top view

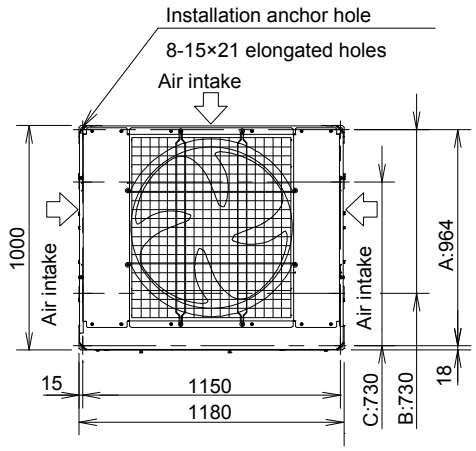

Front view

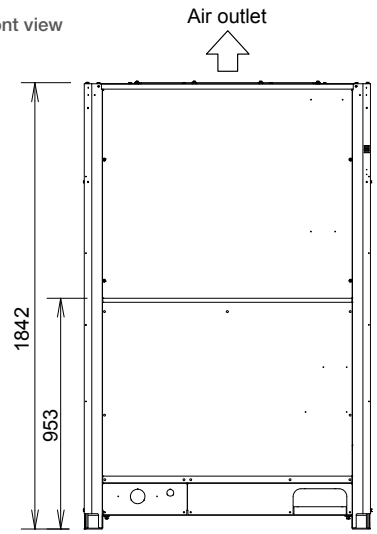


unit: mm

20 / 22 / 24 HP


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

A: (Installation hole pitch) For removing tube forward
B: (Installation hole pitch) For removing the downward
C: (Installation hole pitch)

Top view

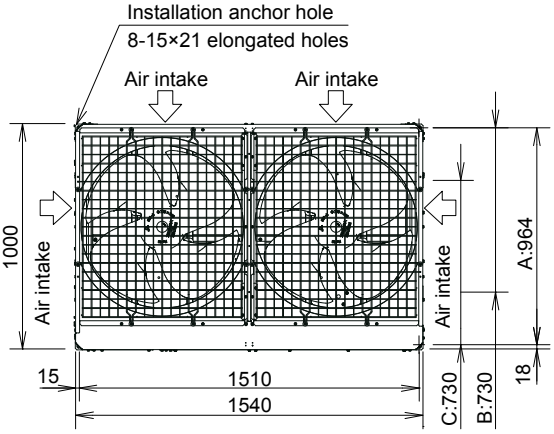


Front view

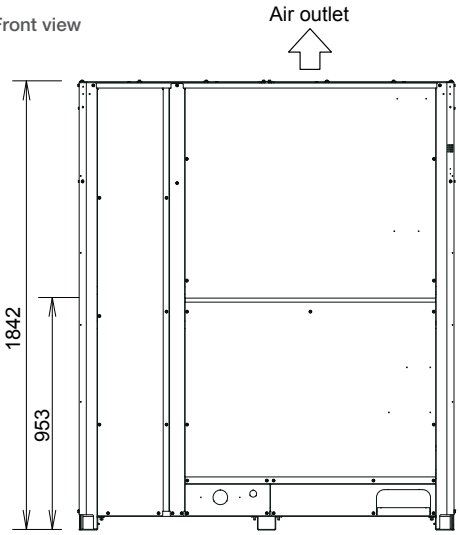

unit: mm

2-WAY Mini-FSV LE Series

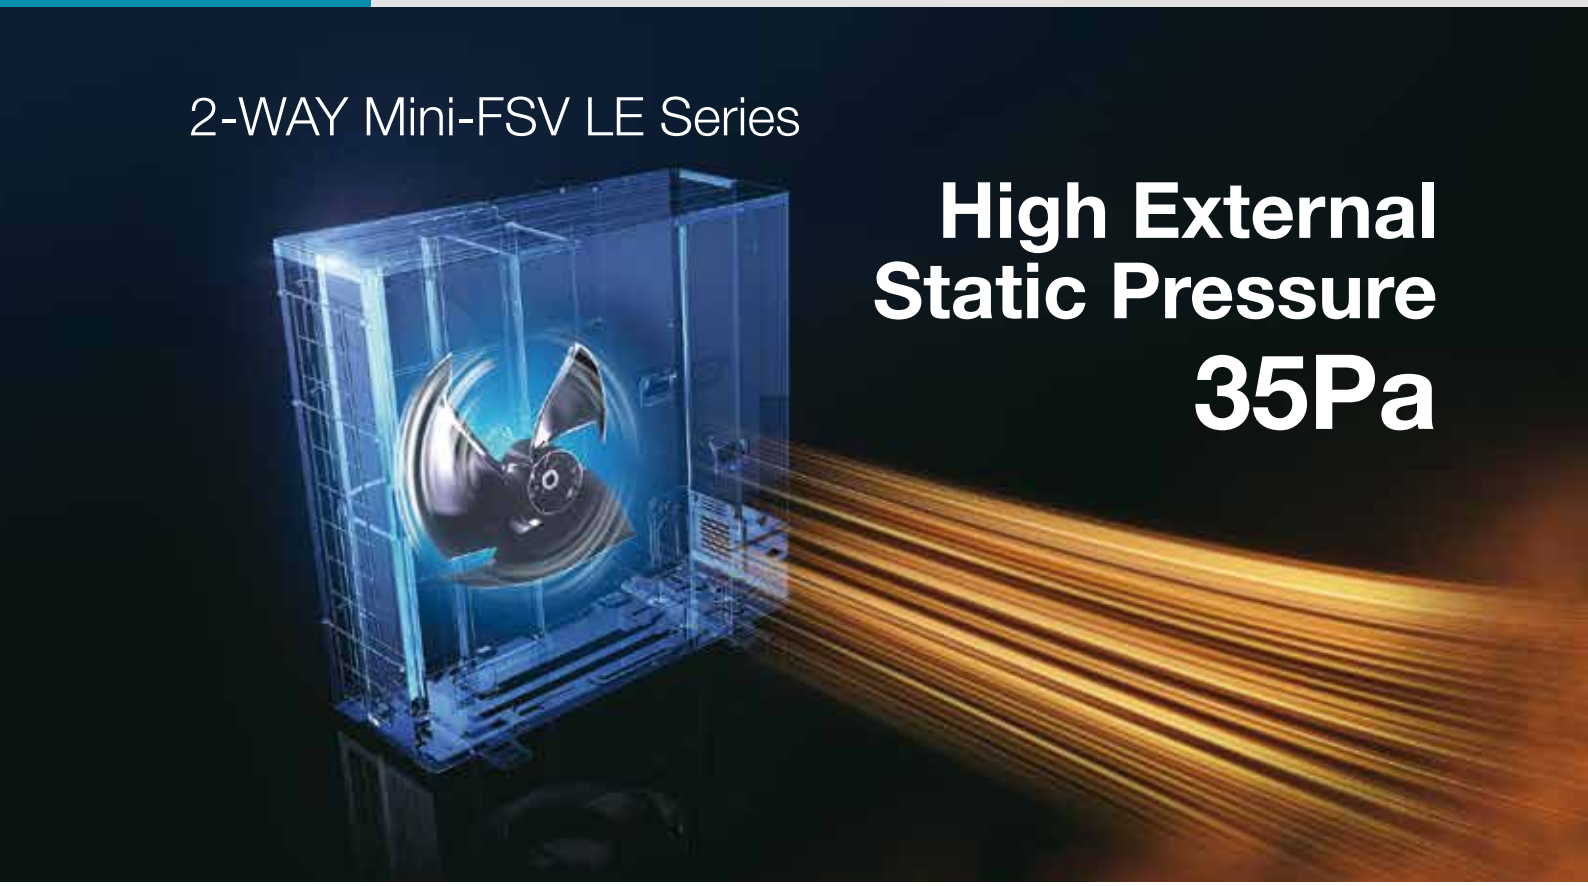

High External Static Pressure 35Pa

High external static pressure 35Pa


LE1 LE2

When unit is installed on a narrow balcony and exposed to the sun, the fence at the front side would restrict hot air from being discharged. Heat accumulated in an enclosure can cause over-heating. This could potentially result in damage or shorten the product's life span. A high external static pressure sends the air further away from the outdoor unit and through the fence. This provides better air circulation and distribution.




Previous model - Low pressure

When the pressure is low, hot air will accumulate in the unit thus affecting its work performance and of the unit above it as well.

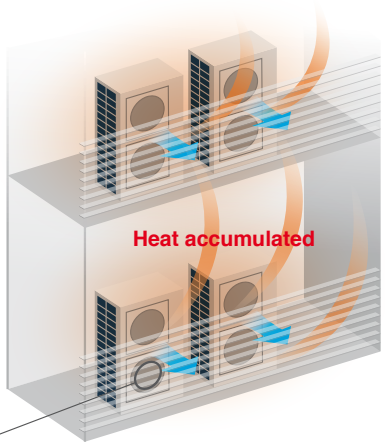

LE series - High pressure

But with a high pressure of 35Pa, hot air is sent further away preventing overheating inside the outdoor unit enclosure.

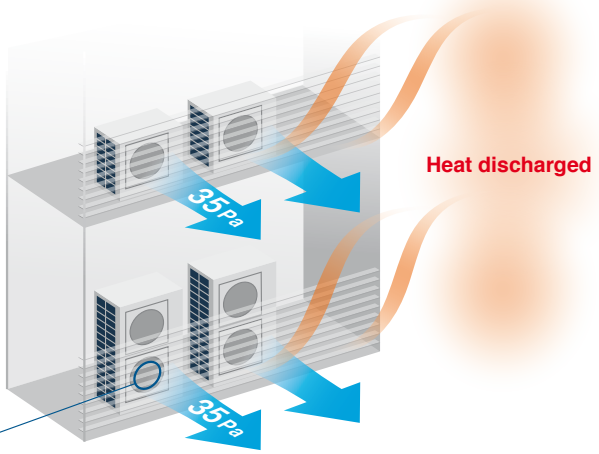

Previous fan

High electrostatic pressure disrupted the airflow of the previous fan, lowering the air pressure and preventing hot air from being discharged far enough.



LE series fan


The new LE Series fan has ribs extending near the blade tips, in a structure that resists deformation. During high electrostatic pressure, this blade shape suppresses disruptions in the airflow, and a high air pressure of 35 Pa discharges the hot air a sufficient distance.



Long piping design length for greater design flexibility

LE1 LE2

Adaptable to various building types and sizes

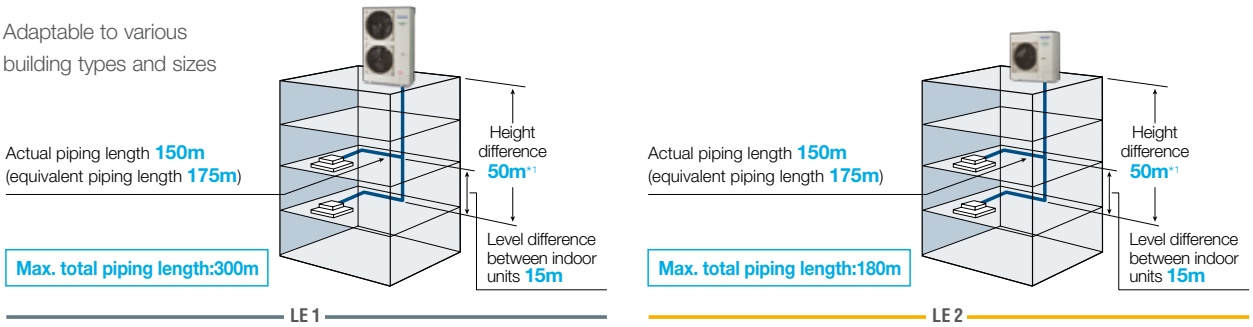

*1: 40m if the outdoor unit is below the indoor unit.

Refrigerant chargeless up to 50m

LE2


Up to 50m of piping without additional gas charging makes installation flexible, easy and hassle-free.

A 50m pipe length is sufficient for most residential and small business buildings. When total piping length exceeds 50m, additional refrigerant charge is required.

Chargeless
Max. total piping length: 50m

Charge
Max. total piping length: 180m
(Actual length: 150m)


[Sample piping lay-out]



Compact design

LE1 LE2

Also, since Mini VRF LE Series is a single unit, it is possible to install the unit in more various places compared to the Single Split system.

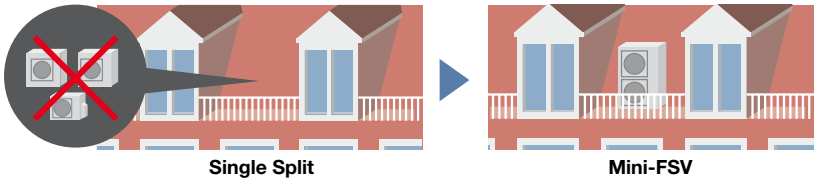

Single Split　　Mini-FSV


Short height of 996mm

LE2

In addition to raising efficiency, we have made the outdoor unit more compact. It can now be installed in places that were previously too small.



Can be installed in the small space

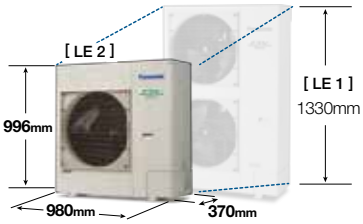

Up to 13 indoor units connectable

LE1 LE2

An expansion from Panasonic VRF line up, the Mini FSV is compatible with the same indoor units and controls as the rest of the FSV range.




* Use any of the 22 type indoor models. Depending on the size or type of indoor unit, tubing size shall be changed. Please refer manuals for details.
* Diversity ratio 50-130%
* 6 HP only; 4 HP for 7 units, 5 HP for 8 units.


2-WAY Mini-FSV LE Series

High efficiency

LE1 LE2


The operation efficiency has been improved using highly efficient R410A refrigerant, a DC Inverter compressor, DC motor and a heat exchanger design.

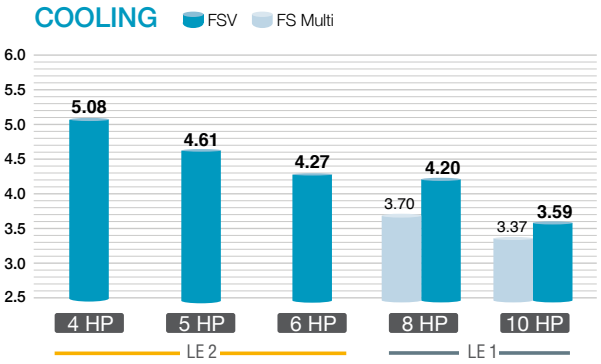

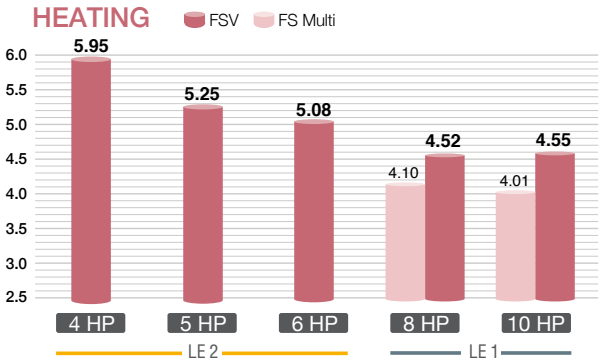

Energy savings design

LE1 LE2

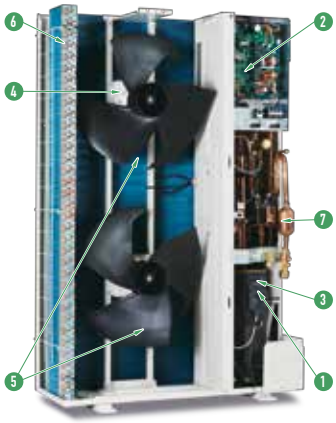

❶ Panasonic Inverter Compressor	A large-capacity inverter compressor has been adopted. The inverter compressor is superior in performance with improved partial-load capacity.
❷ Printed Circuit Board	The number of PCB is 2 pieces for making maintenance easier.
❸ Accumulator	A large accumulator has been adopted to maintain compressor reliability because of the increased refrigerant quantity, which allows an extended max piping length.
❹ DC Fan Motor	Checking load and outside temperature, the DC motor is controlled for optimum air volume.
❺ Newly Designed Fan	The newly designed fan blades have been developed to inhibit air turbulence and to increase efficiency. As fan diameter has been increased its size, the air volume has been increased whilst maintaining a same sound level.
❻ Heat Exchanger & Copper Tubes	The heat exchanger size and the copper tube sizes in the heat exchanger have been redesigned to increase efficiency.
❼ Oil Separator	A centrifugal separator has been adopted to improve oil separation efficiency and reduce refrigerant pressure loss.


Flexible demand response with the optional terminal block

LE1 LE2

Demand Response

Featuring inverter control technology, all Panasonic Mini FSV systems are Demand Response Management (DRM) ready. With this control, power consumption at times of peak load can be set in three steps to deliver optimum performance. This helps to reduce annual power consumption with minimal loss in comfort.


*Terminal block supplied as optional kit. (CZ-CAPDC3) Please ask you dealer.

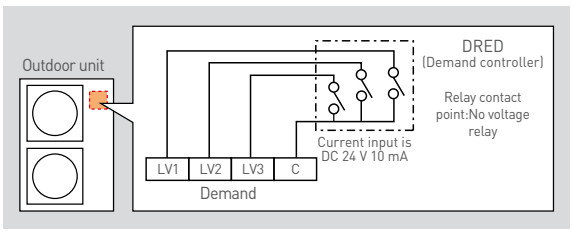

Flexible Demand Response with the CZ-CAPDC2*1

Setting is possible as 0% or in the range from 40 to 100% (in steps of 5%). At the time of shipping, setting has been done to the three steps of 0%, 70% and 100%.

*1 An outdoor Seri-Para I/O unit (CZ-CAPDC2) is required for demand input signal.
* Demand timer setting for high spec remote controller is available.

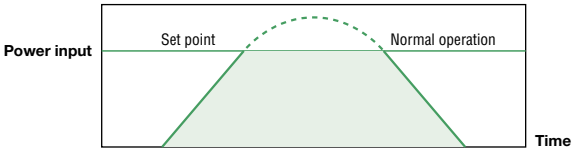

	Power input	
Level 1	100% (Preset)	Possible to change 40-100%
Level 2	70% (Preset)	
Level 3	0% (Always in stop condition)	


Wide operating range

LE1 LE2

- Cooling operation is possible even when outdoor temperature is as low as -10°C DB.
- Cooling operation is possible even when outdoor temperature is as high as 46°C DB.
- Heating operation is possible even when outdoor temperature is as low as -20°C WB.

The remote controller temperature can be set from 18°C up to 30°C (Cooling), 16°C up to 30°C (Heating)*1.

*1 Depending on the type of remote controller.

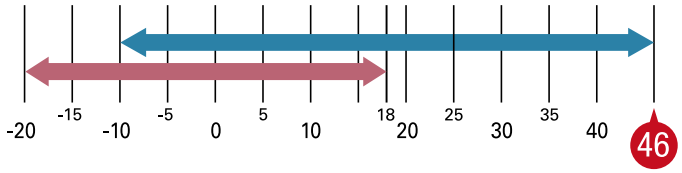


Cooling: -10°C DB ~ 46°C DB Heating: -20°C WB ~ 18°C WB

* For further information please refer to the capacity tables in the Technical Data Book.

Blue fin condenser

LE1 LE2

The anti-corrosion Blue Fin treatment of the heat exchanger provides greater resistance against corrosion. All models are equipped with Blue Fin condenser.

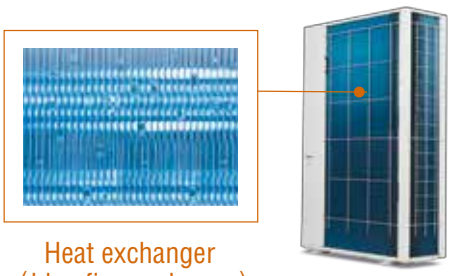

Heat exchanger (blue fin condenser)

[Rear view]

High durability outdoor unit


LE1 LE2

Corrosion-resistance treated for high resistance to rust and salty air to assure long-lasting performance.

Note: Selecting this unit does not completely eliminate the possibility of rust developing. For details concerning unit installation and maintenance, please consult an authorised dealer.

* Specific model with suffix “E” has this treatment.



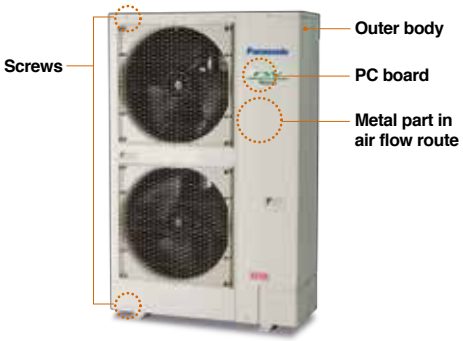

Quiet operation mode

LE1 LE2

- Quiet operation mode reduces outdoor unit operating sound down to 7dB than rating.
- 3-step set point is available.
- External input signal is also available.

* Timer setting of quiet operation mode is available in High-spec Remote Controller (CZ-RTC5B/CZ-RTC6 series).



2-WAY Mini-FSV LE2 Series

HP				4			4			5			5			6			6		
Model name				**U-4LE2H4**			**U-4LE2H7**			**U-5LE2H4**			**U-5LE2H7**			**U-6LE2H4**			**U-6LE2H7**		
Power supply				220/230/240V/ 1-phase/50Hz 220/230V/1-phase/60Hz			380/400/415V/ 3-phase/50Hz 380/400V/3-phase/60Hz			220/230/240V/ 1-phase/50Hz 220/230V/1-phase/60Hz			380/400/415V/ 3-phase/50Hz 380/400V/3-phase/60Hz			220/230/240V/ 1-phase/50Hz 220/230V/1-phase/60Hz			380/400/415V/ 3-phase/50Hz 380/400V/3-phase/60Hz		
Voltage				220V	230V	240V	380V	400V	415V	220V	230V	240V	380V	400V	415V	220V	230V	240V	380V	400V	415V
Capacity	Cooling		kW	12.1			12.1			14.0			14.0			15.5			15.5		
			BTU/h	41,300			41,300			47,800			47,800			52,900			52,900		
	Heating		kW	12.5			12.5			16.0			16.0			16.5			16.5		
			BTU/h	42,700			42,700			54,600			54,600			56,300			56,300		
EER/COP	Cooling		W/W	5.08			5.08			4.61			4.61			4.27			4.27		
	Heating		W/W	5.95			5.95			5.25			5.25			5.08			5.08		
Dimensions	H x W x D		mm	996 x 980 x 370			996 x 980 x 370			996 x 980 x 370			996 x 980 x 370			996 x 980 x 370			996 x 980 x 370		
Net weight			kg	106			106			106			106			106			106		
Electrical ratings	Cooling	Running current	A	11.90	11.40	10.90	3.89	3.69	3.56	15.20	14.50	13.90	4.91	4.67	4.50	18.10	17.30	16.60	5.87	5.57	5.37
		Power input	kW	2.38	2.38	2.38	2.38	2.38	2.38	3.04	3.04	3.04	3.04	3.04	3.04	3.63	3.63	3.63	3.63	3.63	3.63
	Heating	Running current	A	10.60	10.10	9.70	3.47	3.29	3.18	15.20	14.60	14.0	4.93	4.68	4.51	16.20	15.50	14.90	5.25	4.99	4.81
		Power input	kW	2.10	2.10	2.10	2.10	2.10	2.10	3.05	3.05	3.05	3.05	3.05	3.05	3.25	3.25	3.25	3.25	3.25	3.25
Starting current			A	1			1			1			1			1			1		
Air flow rate			m^3/ min	69			69			72			72			74			74		
			L/s	1,150			1,150			1,200			1,200			1,233			1,233		
Refrigerant amount at shipment			kg	R410A 6.70			R410A 6.70			R410A 6.70			R410A 6.70			R410A 6.70			R410A 6.70		
Piping connection	Gas pipe		mm (inches)	Ø15.88 (Ø5/8)			Ø15.88 (Ø5/8)			Ø15.88 (Ø5/8)			Ø15.88 (Ø5/8)			Ø15.88 (Ø5/8)			Ø15.88 (Ø5/8)		
	Liquid pipe		mm (inches)	Ø9.52 (Ø3/8)			Ø9.52 (Ø3/8)			Ø9.52 (Ø3/8)			Ø9.52 (Ø3/8)			Ø9.52 (Ø3/8)			Ø9.52 (Ø3/8)		
Ambient temperature operating range				Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB			Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB			Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB			Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB			Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB			Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB		
Sound pressure level (Cooling)	Normal mode		dB(A)	52.0			52.0			53.0			53.0			54.0			54.0		
	Silent mode (3)		dB(A)	45.0			45.0			46.0			46.0			47.0			47.0		
Sound power level (Cooling)	Normal mode		dB	69.0			69.0			71.0			71.0			73.0			73.0		


Global remarks	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB	7°C DB / 6°C WB

These specifications are subject to change without notice.


Dimensions

U-4LE2H4 / U-4LE2H7
U-5LE2H4 / U-5LE2H7
U-6LE2H4 / U-6LE2H7




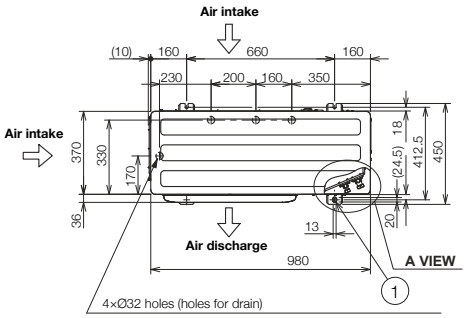



①	Mounting hole (4-R6.5), anchor bolt : M10
②	Refrigerant tubing (liquid tube), flared connection (Ø9.52)
③	Refrigerant tubing (gas tube), flared connection (Ø15.88)
④	Refrigerant tubing port
⑤	Electrical wiring port (Ø13)
⑥	Electrical wiring port (Ø22)
⑦	Electrical wiring port (Ø27)
⑧	Electrical wiring port (Ø35)



A VIEW

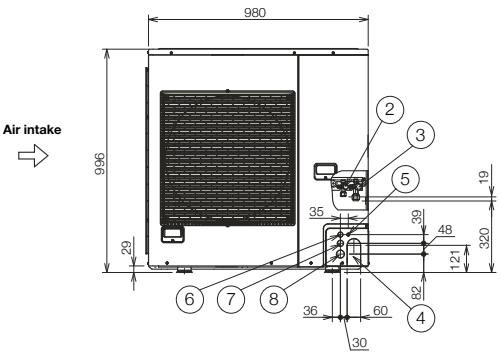





Z VIEW

Unit: mm

2-WAY Mini-FSV LE1 Series

HP				8			10		
Model name				**U-8LE1H7**			**U-10LE1H7**		
Power supply				380/400/415V/3-phase/50Hz 380/400V/3-phase/60Hz			380/400/415V/3-phase/50Hz 380/400V/3-phase/60Hz		
Voltage				380V	400V	415V	380V	400V	415V
Capacity	Cooling		kW	22.4			28.0		
			BTU/h	76,500			95,600		
	Heating		kW	25.0			28.0		
			BTU/h	85,300			95,600		
EER/COP	Cooling		W/W	4.20			3.59		
	Heating		W/W	4.52			4.55		
Dimensions	H x W x D		mm	1,500 x 980 x 370			1,500 x 980 x 370		
Net weight			kg	132			133		
Electrical ratings	Cooling	Running current	A	8.70	8.25	7.95	12.7	12.1	11.7
		Power input	kW	5.33	5.33	5.33	7.80	7.80	7.80
	Heating	Running current	A	9.05	8.60	8.25	10.0	9.55	9.20
		Power input	kW	5.53	5.53	5.53	6.15	6.15	6.15
Starting current			A	1			1		
Air flow rate			m^3 / min	150			160		
			L/s	2,500			2,667		
Refrigerant amount at shipment			kg	R410A 6.30			R410A 6.60		
Piping connection	Gas pipe		mm (inches)	Ø19.05 (Ø3/4)			Ø22.22 (Ø7/8)		
	Liquid pipe		mm (inches)	Ø9.52 (Ø3/8)			Ø9.52 (Ø3/8)		
Ambient temperature operating range				Cooling:-10°CDB~+46°CDB, Heating:-20°CWB~+18°CWB			Cooling:-10°CDB~+46°CDB, Heating:-20°CWB~+18°CWB		
Sound pressure level (Cooling)	Normal mode		dB(A)	59.0			62.0		
	Silent mode (3)		dB(A)	52.0			55.0		
Sound power level (Cooling)	Normal mode		dB	80.0			83.0		


Global remarks	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB	7°C DB / 6°C WB

These specifications are subject to change without notice.

Dimensions


U-8LE1H7 / U-10LE1H7



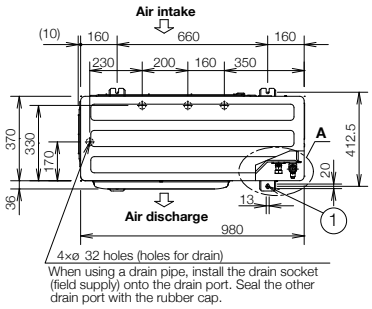



①	Mounting hole (4-R6.5), anchor bolt : M10
②	Refrigerant tubing (liquid tube), flared connection (ø9.52) for 8-10 HP finally.
③	Refrigerant tubing (gas tube), flared connection (ø19.05)
④	Refrigerant tubing port
⑤	Electrical wiring port (ø13)
⑥	Electrical wiring port (ø22)
⑦	Electrical wiring port (ø27)
⑧	Electrical wiring port (ø35)


For U-10LE1H7
The tubing of the gas main has a diameter of ø22.22, but the connection to the service valve of the outdoor unit has a diameter of ø19.05, so a flare has to be used. Consequently, be sure to use the enclosed joint tube B and joint tube A in making connections (braze).



A VIEW

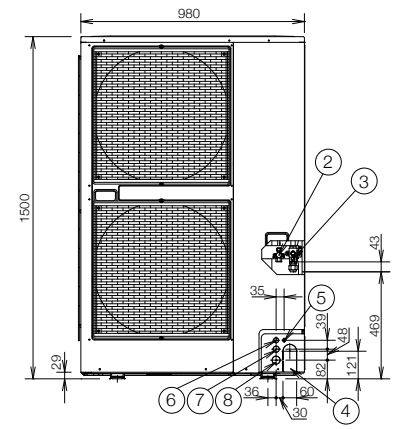

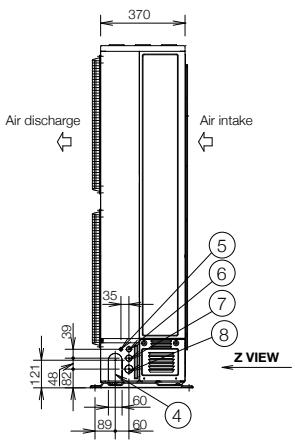



Z VIEW

Unit: mm

24-hour nanoe™ X Air Purification*

While the general filters in air purifiers are effective against airborne bacteria and viruses, nanoe™X also works to inhibit longer-living, adhered bacteria and viruses. As well as this, the Panasonic Comfort Cloud and WLAN smart adaptor (CZ-CAPWFC1) gives you access to your air conditioner anywhere, anytime, so you can turn nanoe™X on even while you're out and enjoy 24-hour quality air.



*Unit must be constantly turned on and operating in the air purification mode - nanoe™ X.
** https://www.businessinsider.com/coronavirus-lifespan-on-surfaces-graphic-2020-3

24-hour nanoe™ X air Purification, anywhere, anytime



Get 24 hr Quality Air for you and your loved ones by turning nanoe™ X on using Panasonic Comfort Cloud even when you're out. nanoe™ X functions in both cooling and heating modes and is maintenance-free, helping you keep your costs down with cleaner air.

- nanoe™ X functions in cooling as well as fan mode after business hours.
- Cleans indoor air even when the space is not in use.
- No need to consume excessive electricity to clean the air.

Please refer to the nanoe™ X website.

Business Hours

•Simulated image



nanoe ON, Cooling ON (Cooling Mode)

nanoe™ X cleans indoor air while maintaining a comfortable temperature when people are present.

After Business Hours

•Simulated image



nanoe ON, Cooling OFF (Fan Mode)




After business hours, nanoe™ X keeps cleaning indoor air in fan mode.

*In case of using 2.2 kW~7.3 kW 4 way cassette models with fan tap L, flap position 5, standard panel. Energy consumption may vary depending on models.


nanoe™ X device evolution

Evolved Discharge System → **Dramatically Increased Release of Hydroxyl Radicals**

Higher Concentration of nanoe™ X in the Space → **Faster nanoe™ X Effects**

	nanoe™	nanoe™ X Generator Mark 1	nanoe™ X Generator Mark 2	nanoe™ X Generator Mark 3
Hydroxyl radicals				
		10x times	20x times	100x times
	0.48 Trillion* hydroxyl radicals/sec	**4.8** Trillion* hydroxyl radicals/sec	**9.6** Trillion* hydroxyl radicals/sec	**48 Trillion*** hydroxyl radicals/sec
Device status				
		Electrostatic atomisation **Multi-leader discharge**		Electrostatic atomisation **Circular discharge**

Differences in discharge systems

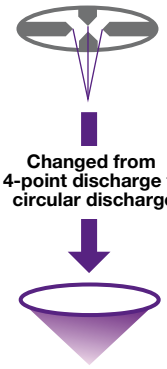


* Measured using the ESR (Electron Spin Resonance) method (amount of hydroxyl radicals immediately after release from the generator). (Source: Panasonic internal research)

nanoe™ X technology inhibits novel coronavirus

Our nanoe™ X technology has shown to suppress the activity of viurses & bacteria. Enjoy cleaner and quality air at home. Stay safer indoors with nanoe™ X.

Test result

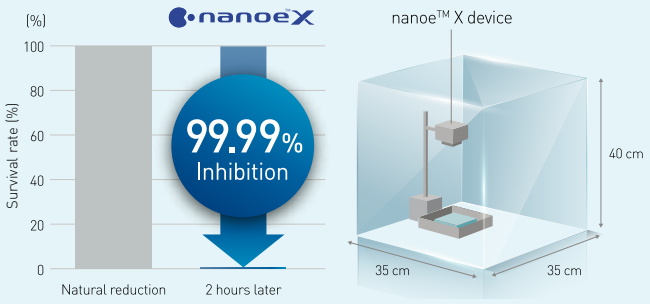


Overview

The objective of this test was to determine if nanoe™ X inhibit the activity of the SARS-CoV-2 virus. Gauze saturated with SARS-CoV-2 virus solution was exposed to a generator of nanoe™ X from a distance of 15 cm in a 45-liter box for 2 hours. Over 99.99%* of the activity of the SARS-CoV-2 virus was inhibited.

Device type: 10 x nanoe™ X (Mark 1)
Subject: Novel coronavirus (SARS-CoV-2)
Test Institute: TEXCELL (France) Test duration: 2 hours

How nanoe™ X inhibits viruses

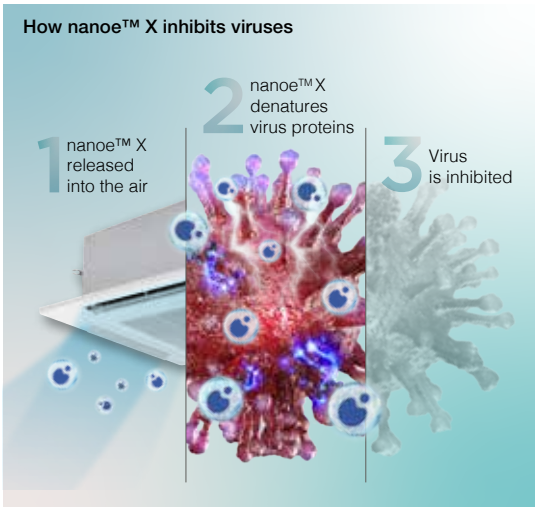


Notes: 1) The virus infectious titer was measured and used to calculate the inhibition rate. 2) This verification was designed to generate basic research data on the effects of nanoe™ X on the novel coronavirus in laboratory conditions. It was not designed to evaluate product performance.

nanoe™ X Mark 3 achieves virus inhibition in a larger space in a shorter time

Mark 3 (100 x) Device: 4-Way Cassette Large-Space Test for Adherent Virus (Bacteriophage)
In a large space of 139 m³ (56 m²), a 98.81% inhibition rate was achieved in 4 hours.

[nanoe™ X Mark 3]
139 m³, 98.81% with 4 hours (56 m², approx. 34 tatami mats, ceiling height 2.48 m)

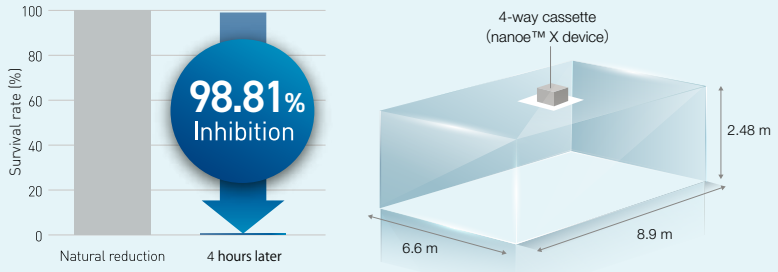

Please refer to the nanoe™ X website for the Mark 3 information.

Device type: nanoe ™ X Generator Mark 3
Subject: Adhesive virus (coliphage)
Indoor unit: 4-way cassette
Test Institute: SGS Inc
Test duration: 4 hours
Report No.: SHES210901902584

Smart comfort with CONEX

CONEX goes beyond simple remote control to combine sophistication with simplicity, offering IoT integration that connects directly to a variety of apps for next-generation solutions.



Simple and sophisticated design in-and-out

User friendly interface with stylish design measuring just 86 x 86 mm, CONEX is an extremely compact remote controller which perfectly matches with all kinds of modern building.



(CZ-RTC6W/CZ-RTC6WBL)



(CZ-RTC6/CZ-RTC6BL)

CONEX

Easy control and access for end users and installers with just one remote

User-friendly day day-to-day operation for end users and simplified set up for installers.





A next-generation remote control solution optimised for usability

H&C Control App

▸ End user ▸ Installer

- Easy setting of timers and scheduling as well as monitoring power consumption.
- Fine tune the equipment to the environment.

Panasonic

Download on the App Store

GET IT ON Google Play

Scan QR code to download free Panasonic H&C Control App



(CZ-RTC6WBL/CZ-RTC6BL)

True-comfort for end user and installer – H&C Control App

H&C Control App makes complex initial set-up visually touch and feel easy and respond swiftly to clients' requests via Bluetooth using a smartphone or tablet.





Advantages

Comfort day-to day operations

It's now simpler than ever for end users to further customize settings to meet their needs and perform operations including basic settings.

Intuitive operation for easy configuration

Simplifies initial controller configuration as well as access to comprehensive settings including weekly timers and maintenance.

Straightforward suggestions to clients

Share a single screen with your customer and together tailor everything to meet their needs, from basic setup to weekly timers, all in real time.

Quicker configuration for multiple controllers

Save time and copy templates for weekly timers and settings to multiple remote controllers.





FSV Indoor Units Range

Wide choice of models depending on the indoor requirements

Class	22	28	36	45	56	60	73	90
Capacity	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating
Type / kW / BTU/h	2.2/2.5 7,500/8,500	2.8/3.2 9,600/10,900	3.6/4.2 12,300/14,300	4.5/5.0 15,400/17,100	5.6/6.3 19,100/21,500	6.0/7.1 20,500/24,200	7.3/8.0 24,900/27,300	9.0/10.0 30,700/34,100
nanoe™X Generator Mark3 F3 type ECONAVI **Mid Static Adaptive Ducted**	NEW  S-22MF3E5AN	NEW  S-28MF3E5AN	NEW  S-36MF3E5AN	NEW  S-45MF3E5AN	NEW  S-56MF3E5AN	NEW  S-60MF3E5AN	NEW  S-73MF3E5AN	NEW  S-90MF3E5AN
M1 type ECONAVI **Slim Low Static Ducted**	 S-22MM1E5A	 S-28MM1E5A	 S-36MM1E5A	 S-45MM1E5A	 S-56MM1E5A			
Z1 type ECONAVI **Slim Low Static Ducted Twenty Series**	 S-22MZ1H4A	 S-28MZ1H4A	 S-36MZ1H4A	 S-45MZ1H4A	 S-56MZ1H4A	 S-60MZ1H4A	 S-73MZ1H4A	
E2 type **High Static Ducted / Energy Saving High-Fresh Air Ducted**								
H1 type **High Fresh Air Ducted**								
K2 type ECONAVI **Wall Mounted**	 S-22MK2E5A	 S-28MK2E5A	 S-36MK2E5A	 S-45MK2E5A	 S-56MK2E5A		 S-73MK2E5A	
nanoe™X Generator Mark3 U2 type ECONAVI ** **4-Way Cassette** Panel No. CZ-KPU3H Panel No. CZ-KPU3A	NEW  S-22MU2E5BN	NEW  S-28MU2E5BN	NEW  S-36MU2E5BN	NEW  S-45MU2E5BN	NEW  S-56MU2E5BN	NEW  S-60MU2E5BN	NEW  S-73MU2E5BN	NEW  S-90MU2E5BN
nanoe™X Generator Mark3 Y3 type ECONAVI **4-Way Mini Cassette** Panel No. CZ-KPY4	 S-22MY3E	 S-28MY3E	 S-36MY3E	 S-45MY3E	 S-56MY3E			
L1 type **2-Way Cassette** Panel No. CZ-02KPL2 Panel No. CZ-03KPL2 (Only for S-73ML1E5)	 S-22ML1E5	 S-28ML1E5	 S-36ML1E5	 S-45ML1E5	 S-56ML1E5		 S-73ML1E5	
D1 type **1-Way Cassette** Panel No. CZ-KPD2		 S-28MD1E5	 S-36MD1E5	 S-45MD1E5	 S-56MD1E5		 S-73MD1E5	
T2 type ECONAVI **Ceiling**			 S-36MT2E5A	 S-45MT2E5A	 S-56MT2E5A		 S-73MT2E5A	
P1 type **Floor Standing**	 S-22MP1E5	 S-28MP1E5	 S-36MP1E5	 S-45MP1E5	 S-56MP1E5		 S-71MP1E5	
R1 type **Concealed Floor Standing**	 S-22MR1E5	 S-28MR1E5	 S-36MR1E5	 S-45MR1E5	 S-56MR1E5		 S-71MR1E5	

* High flesh air system is not allowed for 18 kW model.
** Only for CZ-KPU3A

106	112	140	160	180	224	280	Wireless remote control		
Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Type with built-in sensor	Type with separately installed sensor	Functions
10.6/11.4 36,200/38,900	11.02/12.5 38,200/42,700	14.0/16.0 47,800/54,600	16.0/18.0 54,600/61,400	18.0/20.0 61,400/68,200	22.4/25.0 76,400/85,300	28.0/31.5 95,500/107,500			
	NEW  S-112MF3E5AN	NEW  S-140MF3E5AN	NEW  S-160MF3E5AN					●	self-diagnosis, Auto fan, Dry mode, Auto restart, Drain pump, DC motor
								●	self-diagnosis, Auto fan, Dry mode, Auto restart, Drain pump, DC motor
								●	self-diagnosis, Auto fan, Dry mode, Auto restart, DC motor
				 S-180ME2E5 *	High Fresh Air  S-224ME2E5	High Fresh Air  S-280ME2E5		●	self-diagnosis, Auto fan, Dry mode, Auto restart, DC motor
		High Fresh Air  S-140MH1H5			High Fresh Air  S-224MH1H5	High Fresh Air  S-280MH1H5		●	self-diagnosis, Auto fan, Auto restart
 S-106MK2E5A							●		self-diagnosis, Auto fan, Dry mode, Auto flap, Auto restart, Air swing, Drain pump
	NEW  S-112MU2E5BN	NEW  S-140MU2E5BN	NEW  S-160MU2E5BN					●	self-diagnosis, Auto fan, Dry mode, Auto flap, Auto restart, Air swing, Drain pump, DC motor
								●	self-diagnosis, Auto fan, Dry mode, Auto flap, Auto restart, Air swing, Drain pump, DC motor
								●	self-diagnosis, Auto fan, Dry mode, Auto flap, Auto restart, Air swing, Drain pump
								●	self-diagnosis, Auto fan, Dry mode, Auto flap, Auto restart, Air swing, Drain pump, DC motor
 S-106MT2E5A		 S-140MT2E5A						●	self-diagnosis, Auto fan, Dry mode, Auto flap, Auto restart, Air swing, DC motor
								●	self-diagnosis, Auto fan, Dry mode, Auto restart
								●	self-diagnosis, Auto fan, Dry mode, Auto restart

Self-diagnosis function
Automatic fan operation
Dry mode
Intelligent auto flap control
Automatic restart function for power failure
Air swing
Built-in drain pump
DC motor

NEW

F3 TYPE Mid Static Adaptive Ducted

DC motor

Control all aspects of your environment with exceptional performance and quiet operation. Vertical installation flexibility offers the perfect solution when ceiling heights are restricted.



S-22MF3E5AN / S-28MF3E5AN / S-36MF3E5AN
S-45MF3E5AN / S-56MF3E5AN




S-60MF3E5AN / S-73MF3E5AN
S-90MF3E5AN

Technical focus

- 4 installation possibilities with horizontal and vertical mounting and selectable rear or bottom air inlet
- DC fan motor for variable external static pressure control
- Industry-leading horizontal/vertical design with 250 mm height
- Powerful 150 Pa static pressure in a compact unit.
- Leading-class low sound levels from 20 dB(A)
- Improved drain pan suitable for both horizontal / vertical installation
- nanoe™ X : 100x for CAC (100 times more nanoe™ particle for wide commercial space)
- Possible to control discharge air temperature for accurate room temperature control.

Powerful 150 Pa external static pressure in an industry-leading horizontal/vertical installation design

Delivering static pressure up to 150 Pa external static pressure, the industry-leading horizontal/vertical design offers the power you need in a compact form factor.

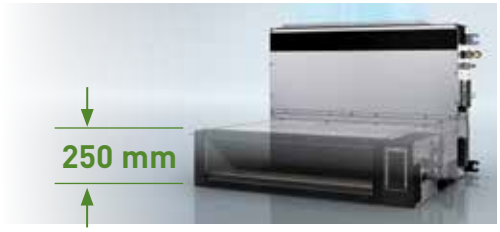

Improved drain pan design


Drain pan is shared in both cases horizontal and vertical installation. No need to alternate anymore.



Superior Air Quality

Combined with the strong static pressure this model ensures pristine nanoe™ X air travels unaffected even through multiple duct shapes at lengths of 10 m, as well as making them ideal for use in larger spaces.

nanoe™X

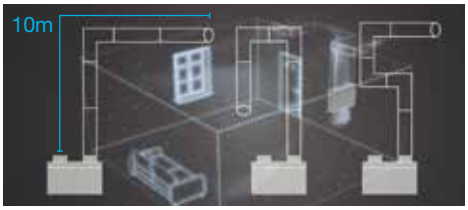

As the experiments demonstrate; even with a total ductwork length of up to 10 m, effectiveness of nanoe™ X is maintained.

Model Name			S-22MF3E5AN	S-28MF3E5AN	S-36MF3E5AN	S-45MF3E5AN	S-56MF3E5AN
Power source			220/230/240 V, 1 phase - 50/60 Hz				
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6
		BTU/h	7,500	9,600	12,300	15,400	19,100
Heating capacity		kW	2.5	3.2	4.2	5.0	6.3
		BTU/h	8,500	10,900	14,300	17,100	21,500
Power input	Cooling	kW	0.06/0.06/0.06	0.06/0.06/0.06	0.06/0.06/0.06	0.06/0.06/0.06	0.089/0.089/0.089
	Heating	kW	0.06/0.06/0.06	0.06/0.06/0.06	0.06/0.06/0.06	0.06/0.06/0.06	0.089/0.089/0.089
Running current	Cooling	A	0.46/0.45/0.44	0.46/0.45/0.44	0.46/0.45/0.44	0.46/0.45/0.44	0.65/0.63/0.61
	Heating	A	0.46/0.45/0.44	0.46/0.45/0.44	0.46/0.45/0.44	0.46/0.45/0.44	0.65/0.63/0.61
Fan motor	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Cooling Air flow rate (H/M/L)	m³/h	768/660/480	768/660/480	840/720/480	840/720/480	960/840/600
		L/s	213/183/133	213/183/133	233/200/133	233/200/133	267/233/167
	Heating Air flow rate (H/M/L)	m³/h	840/720/480	840/720/480	840/720/480	840/720/480	960/840/600
		L/s	233/200/133	233/200/133	233/200/133	233/200/133	267/233/167
	Output	kW	0.107	0.107	0.107	0.107	0.107
	External static pressure	Pa	30 (10-150)	30 (10-150)	30 (10-150)	30 (10-150)	30 (10-150)
Sound power level (H/M/L)		dB	54/51/43	54/51/43	54/51/43	54/51/43	58/55/47
Sound pressure sound (H/M/L)		dB(A)	31/28/20	31/28/20	31/28/20	31/28/20	35/32/24
Dimensions	H x W x D	mm	250 x 800 x 730	250 x 800 x 730	250 x 800 x 730	250 x 800 x 730	250 x 800 x 730
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)
	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20
Net weight		kg	26	26	26	26	26

nanoe™ X Generator Mark3

Please refer to the nanoe™ X website for the Mark 3 information.



S-106MF3E5AN / S-140MF3E5AN / S-160MF3E5AN

Optional accessory

ECONAVI ready



CZ-RTC6W
CZ-RTC6WBL
CZ-RTC6WBLW



CZ-RTC6
CZ-RTC6BL
CZ-RTC6BLW



CZ-CENSC1



CZ-RTC5B



CZ-RWS3
Remote controller




CZ-RWRC3
Receiver

Built-in Drain pump (DC motor pump)

External electrical equipment box makes maintenance easy

Space saving height of 250 mm for all models


250 mm standardised height provides easy and uniform installation for models with different capacities, especially when ceiling heights are restricted.

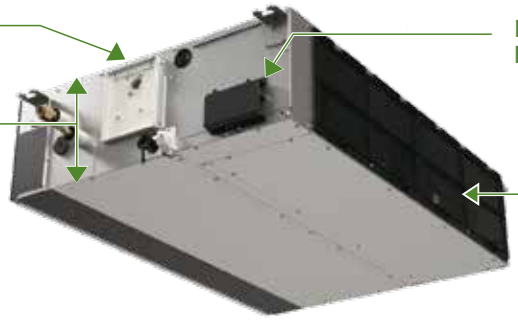

Built-in filter


Selectable air inlet position

A removable panel allows air inlet position to be adjusted to enable rear or bottom entry, depending on ductwork installation.

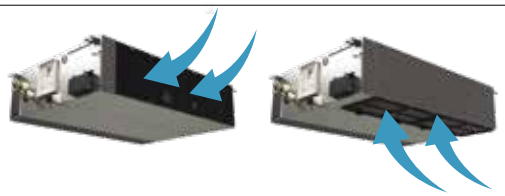


System example

An inspection port (450 mm x 450 mm or larger) is required at the lower side of the indoor unit body.

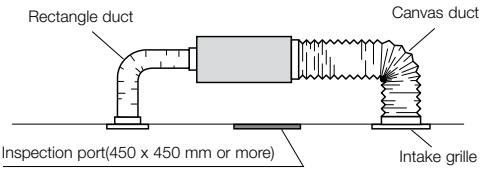

More powerful drain pump

Using a high-lift built-in drain pump, drain piping can be elevated up to 690 mm from the base of the unit.

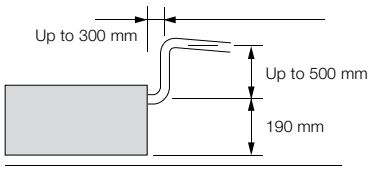

S-60MF3E5AN	S-73MF3E5AN	S-90MF3E5AN	S-112MF3E5AN	S-140MF3E5AN	S-160MF3E5AN
220/230/240 V, 1 phase - 50/60 Hz					
6.0	7.3	9.0	11.2	14.0	16.0
20,500	24,900	30,700	38,200	47,800	54,600
7.1	8.0	10.0	12.5	16.0	18.0
24,200	27,300	34,100	42,700	54,600	61,400
0.079/0.079/0.079	0.079/0.079/0.079	0.136/0.136/0.136	0.265/0.265/0.265	0.265/0.265/0.265	0.330/0.330/0.330
0.079/0.079/0.079	0.079/0.079/0.079	0.136/0.136/0.136	0.265/0.265/0.265	0.265/0.265/0.265	0.330/0.330/0.330
0.53/0.52/0.51	0.53/0.52/0.51	0.92/0.90/0.88	1.80/1.76/1.72	1.80/1.76/1.72	2.22/2.14/2.09
0.53/0.52/0.51	0.53/0.52/0.51	0.92/0.90/0.88	1.80/1.76/1.72	1.80/1.76/1.72	2.22/2.14/2.09
Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
1,260/1,080/900	1,260/1,080/900	1,500/1,380/960	2,220/1,920/1,560	2,220/1,920/1,560	2,400/2,040/1,680
350/300/250	350/300/250	417/383/267	617/533/433	617/533/433	667/567/467
1,260/1,080/900	1,260/1,080/900	1,500/1,380/960	2,220/1,920/1,560	2,220/1,920/1,560	2,400/2,040/1,680
350/300/250	350/300/250	417/383/267	617/533/433	617/533/433	667/567/467
0.165	0.165	0.165	0.259	0.259	0.259
30 (10-150)	30 (10-150)	40 (10-150)	50 (10-150)	50 (10-150)	50 (10-150)
54/51/46	54/51/46	58/56/48	64/59/55	64/59/55	66/60/56
31/28/23	31/28/23	35/33/25	41/36/32	41/36/32	43/37/33
250 x 1,000 x 730	250 x 1,000 x 730	250 x 1,000 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730
Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
31	31	31	40	40	40

GLOBAL REMARKS

Rated conditions: Cooling
Indoor air temperature 27°C DB / 19°C WB
Outdoor air temperature 35°C DB / 24°C WB
Rated conditions: Heating
Indoor air temperature 20°C DB
Outdoor air temperature 7°C DB / 6°C WB

Specifications are subject to change without notice.

M1 TYPE Slim Low Static Ducted

DC motor

Concealed duct



S-22MM1E5A
S-28MM1E5A
S-36MM1E5A
S-45MM1E5A
S-56MM1E5A

Optional accessory

ECONAVI
ECONAVI ready



CZ-RTC6W
CZ-RTC6WBL



CZ-RTC6
CZ-RTC6BL



CZ-CENSC1



CZ-RTC5B



CZ-RWS3
Remote controller



CZ-RWRC3
Receiver

Technical focus

- Ultra-slim profile: 200 mm for all models
- DC fan motor greatly reduces power consumption
- Ideal for hotel application with very narrow false ceilings
- Easy maintenance and service by external electrical box
- 40 Pa static pressure enables ductwork to be fitted.
- Includes drain pump
- Includes built in filter


Ultra-slim profile for all models

200 mm height for all models allows installation in very narrow ceilings.



Drain pump with increased power

Using the built-in high-lift drain pump, the drain piping rise height can be increased to 653 mm from the lower surface of the body.

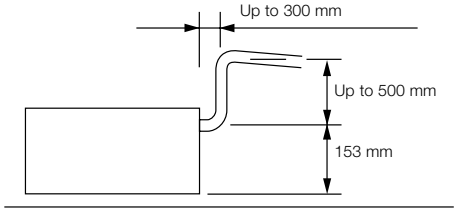

Model Name			S-22MM1E5A	S-28MM1E5A	S-36MM1E5A	S-45MM1E5A	S-56MM1E5A
Power source			220/230/240 V, 1 phase - 50 / 60 Hz				
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6
		BTU/h	7,500	9,600	12,300	15,400	19,100
Heating capacity		kW	2.5	3.2	4.2	5.0	6.3
		BTU/h	8,500	10,900	14,300	17,100	21,500
Power input	Cooling	kW	0.036/0.036/0.036	0.040/0.040/0.040	0.042/0.042/0.042	0.049/0.049/0.049	0.064/0.064/0.064
	Heating	kW	0.026/0.026/0.026	0.030/0.030/0.030	0.032/0.032/0.032	0.039/0.039/0.039	0.054/0.054/0.054
Running current	Cooling	A	0.26/0.26/0.26	0.30/0.30/0.30	0.31/0.31/0.31	0.37/0.37/0.37	0.48/0.48/0.48
	Heating	A	0.23/0.23/0.23	0.27/0.27/0.27	0.28/0.28/0.28	0.34/0.34/0.34	0.45/0.45/0.45
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m^3/h	480/420/360	510/450/390	540/480/420	630/570/480	750/690/600
		L/s	133/117/100	142/125/108	150/133/117	175/158/133	208/192/167
	Motor output	kW	0.06	0.06	0.06	0.06	0.06
	External static pressure	Pa	10 (30)*	15 (30)*	15 (40)*	15 (40)*	15 (40)*
Sound power level (H/M/L)		dB	43/42/40	45/44/42	47/45/43	49/47/45	50/48/46
Sound pressure level (H/M/L)		dB(A)	28/27/25 (30/29/27)*	30/29/27 (32/31/29)*	32/30/28 (34/32/30)*	34/32/30 (36/34/32)*	35/33/31 (37/35/32)*
Dimensions	H x W x D	mm	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)
	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20
Net weight		kg	19	19	19	19	19

Global remarks	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

* With booster cable.

Z1 TYPE Slim Low Static Ducted Twenty Series

DC motor

Concealed duct



S-73MZ1H4A

S-22MZ1H4A / S-28MZ1H4A / S-36MZ1H4A
S-45MZ1H4A / S-56MZ1H4A / S-60MZ1H4A

Optional accessory

ECONAVI

ECONAVI ready



CZ-RTC6W
CZ-RTC6WBL



CZ-RTC6
CZ-RTC6BL



CZ-CENSC1



CZ-RTC5B



CZ-RWS3
Remote controller



CZ-RWRC3
Receiver

Technical focus

- Ultra-slim profile: 200 mm for all models
- DC fan motor greatly reduces power consumption
- Ideal for hotel application with very narrow false ceilings
- Easy maintenance and service by external electrical box
- 29 Pa static pressure enables ductwork to be fitted.
- Drain pump (optional)

Ultra-slim profile for all models

200 mm height for all models allows installation in very narrow ceilings.



Drain pump with increased power (optional)

Using the optional high-lift drainage pump, the drain piping rise height can be increased up to 1,000 mm from the drain pipe port.



CZ-73DMZ1

Model Name			S-22MZ1H4A	S-28MZ1H4A	S-36MZ1H4A	S-45MZ1H4A	S-56MZ1H4A	S-60MZ1H4A	S-73MZ1H4A
Power source			220/230/240 V, 1 phase - 50 / 60 Hz						
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6	6.0	7.3
		BTU/h	7,500	9,500	12,200	15,300	19,100	20,500	24,900
Heating capacity		kW	2.5	3.2	4.2	5.1	6.4	7.1	8.0
		BTU/h	8,500	10,900	14,300	17,400	21,800	24,200	27,300
Power input	Cooling	kW	0.075/0.075/0.075	0.080/0.080/0.080	0.085/0.085/0.085	0.095/0.095/0.095	0.100/0.100/0.100	0.100/0.100/0.100	0.125/0.125/0.125
	Heating	kW	0.075/0.075/0.075	0.080/0.080/0.080	0.085/0.085/0.085	0.095/0.095/0.095	0.100/0.100/0.100	0.100/0.100/0.100	0.125/0.125/0.125
Running current	Cooling	A	0.50/0.47/0.45	0.55/0.52/0.50	0.60/0.57/0.55	0.70/0.68/0.65	0.75/0.72/0.70	0.75/0.72/0.70	0.80/0.78/0.75
	Heating	A	0.50/0.47/0.45	0.55/0.52/0.50	0.60/0.57/0.55	0.70/0.68/0.65	0.75/0.72/0.70	0.75/0.72/0.70	0.80/0.78/0.75
Fan	Type		Sirroco fan	Sirroco fan	Sirroco fan	Sirroco fan	Sirroco fan	Sirroco fan	Sirroco fan
	Air flow rate (H/M/L)	m³/h	480/420/360	600/540/420	600/540/420	690/630/510	720/660/540	870/750/630	1,080/840/660
		L/s	133/117/100	167/150/117	167/150/117	192/175/142	200/183/150	242/208/175	300/233/183
	Motor output	kW	0.06	0.06	0.06	0.06	0.06	0.06	0.06
	External static pressure	Pa	10-30	10-30	10-30	10-30	10-30	10-30	10-30
Sound power level (H/M/L)		dB	50/49/47	52/51/49	54/52/50	56/54/52	57/55/53	60/57/55	62/60/58
Sound pressure level (H/M/L)		dB(A)	28/27/25	30/29/27	32/30/28	34/32/30	35/33/31	38/35/33	40/38/36
Dimensions	H x W x D	mm	200×830×500	200×830×500	200×830×500	200×830×500	200×830×500	200×830×500	200x1,050×550
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
	Drain piping		VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
Net weight		kg	17	17	18	18	18	18	24

Global remarks	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

E2 TYPE High Static Ducted

DC motor

Concealed duct / Air conditioning mode



S-180ME2E5
S-224ME2E5
S-280ME2E5

Optional accessory



CZ-RTC6W
CZ-RTC6WBL



CZ-RTC6
CZ-RTC6BL



CZ-RTC5B



CZ-RWS3
Remote controller




CZ-RWRC3
Receiver

Technical focus

- Design flexibility thanks to high static pressure and large air volume
- DC motor equipped
- Power input 45% less (compared to E1 type)
- Discharge air temperature control to reduce cold drafts during heating operation
- Configurable air temperature control
- Available Fresh Air Intake mode (See page 29)

3-step static pressure set up

You can select between the three Static Pressure modes of 270 Pa/140 Pa/60 (72*) Pa for extra installation flexibility.



* 28 kW model

Max. 270 Pa static pressure setting


A maximum static pressure setting of a high 270 Pa enables the use of long ducts for installation in a wide range of spaces. Ideal for large-scale offices, restaurants and other facilities.

Sensible cooling 5-10% improved

New heat exchanger with ϕ7 mm pipe that increases the heat transfer surface to improve sensible cooling (5-10% improvement)

Discharge air temperature control

- Equipped with 4 sensors (Intake/ Discharge)
- Able to control discharge air temperature for accurate room temperature control.
- Possible to reduce cold drafts during heating operation.

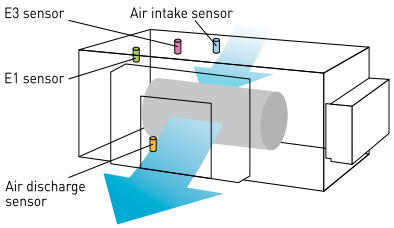

Model Name			S-180ME2E5	S-224ME2E5	S-280ME2E5
Power source			220/230/240V, 1 Phase-50 Hz, 220/230V, 1 Phase-60Hz		
Cooling capacity		kW	18.0	22.4	28.0
		BTU/h	61,400	76,400	95,500
Heating capacity		kW	20.0	25.0	31.5
		BTU/h	68,200	85,300	107,500
Power input	Cooling	kW	0.400	0.440	0.715
	Heating	kW	0.400	0.440	0.715
Running current	Cooling	A	2.40 / 2.30 / 2.20	2.55 / 2.45 / 2.35	3.95 / 3.85 / 3.70
	Heating	A	2.40 / 2.30 / 2.20	2.55 / 2.45 / 2.35	3.95 / 3.85 / 3.70
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m^3/h	2,940 / 2,640 / 2,340	3,360 / 3,060 / 2,640	4,320 / 3,780 / 3,180
		L/s	817 / 733 / 650	933 / 850 / 733	1,200 / 1,050 / 883
	Motor output	kW	0.560 x 2	0.560 x 2	0.750 x 2
	External static pressure	Pa	140 (60/270)	140 (60/270)	140 (72/270)
Sound power level (H/M/L)		dB	76 / 74 / 72	77 / 75 / 73	81 / 79 / 75
Sound pressure level (H/M/L)		dB(A)	44 / 42 / 40	45 / 43 / 41	49 / 47 / 43
Dimensions	H x W x D	mm	479 x 1,453 x 1,205	479 x 1,453 x 1,205	479 x 1,453 x 1,205
Pipe connections	Liquid	mm (inches)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas	mm (inches)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø22.22 (7/8)
	Drain piping		VP-25	VP-25	VP-25
Net weight		kg	102	102	106

Global remarks	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

E2 TYPE Energy Saving High Fresh Air Ducted

DC motor

Concealed duct high-static pressure



S-224ME2E5
S-280ME2E5

Optional accessory



CZ-RTC6W
CZ-RTC6WBL



CZ-RTC6
CZ-RTC6BL



CZ-RTC5B



CZ-RWS3
Remote controller



CZ-RWRC3
Receiver


Technical focus

- 100% fresh air intake for ventilation purpose
- Design flexibility with high static pressure and large air volume
- DC motor equipped
- Power input 45% less (compared to H1 type)
- Discharge air temperature control to reduce cold drafts during heating operation
- Configurable air temperature control

High fresh system

High Fresh System enables delivery of fresh outside air at almost the same temperature and humidity as indoor air without putting a burden on air conditioning.

* Capable of treating outdoor air only. Indoor air conditioner units are required to adjust indoor air temperature.

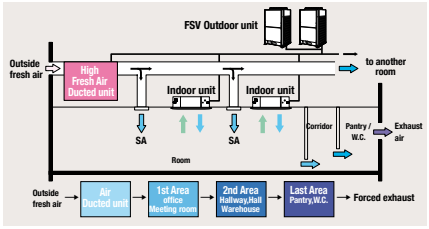


Mix operation unit with standard indoor units

Possible to combine High Fresh Air ducted indoor unit and standard air ducted indoor units.
When other indoor units are connected in same circuit, keep following capacity ratio.
E2 type/Outdoor unit < 30%, and Total of indoors(incl. E2)/outdoor <100%

Discharge air temperature control

- Equipped with 4 sensors (Intake/ Discharge)
- Able to control discharge air temperature for accurate room temperature control.
- Possible to reduce cold drafts during heating operation.



Model Name			S-224ME2E5	S-280ME2E5
Power source			220/230/240V, 1 Phase-50 Hz, 220/230V, 1 Phase-60Hz	
Cooling capacity		kW	22.4	28.0
		BTU/h	76,400	95,500
Heating capacity		kW	21.2	26.5
		BTU/h	72,300	90,400
Power input	Cooling	kW	0.290	0.350
	Heating	kW	0.290	0.350
Running current	Cooling	A	1.90/1.85/1.80	2.30/2.20/2.10
	Heating	A	1.90/1.85/1.80	2.30/2.20/2.10
Fan	Type		Sirocco fan	Sirocco fan
	Air flow rate	m^3/h	1,700	2,100
		L/s	472	583
	Motor output	kW	0.560 x 2	0.750 x 2
	External static pressure	Pa	200	200
Sound power level		dB	75	76
Sound pressure level		dB(A)	43	44
Dimensions	H x W x D	mm	479 x 1,453 x 1,205	479 x 1,453 x 1,205
Pipe connections	Liquid	mm (inches)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)
	Drain piping		VP-25	VP-25
Net weight		kg	102	106

Global remarks	Rated conditions:	Cooling	Heating
	Outdoor air temperature	33°C DB / 28°C WB	0°C DB / -2.9°C WB

H1 TYPE High-Fresh Air Ducted

Concealed duct

High static and large airflow ducted for exceptional installation flexibility.

Self-diagnosing Function

Automatic Fan Operation


Automatic Restart Function

Technical focus

- 100% fresh Air intake for ventilation purpose
- Design flexibility thanks to high static pressure and large air volume
- Discharge air temperature control to reduce cold drafts during heating operation
- Configurable air temperature control

High Fresh System

High Fresh system enables delivery of fresh outside air at almost the same temperature and humidity as indoor air without putting a burden on air conditioning.
* Capable of treating outdoor air only. Indoor air conditioner units are required to adjust indoor air temperature.

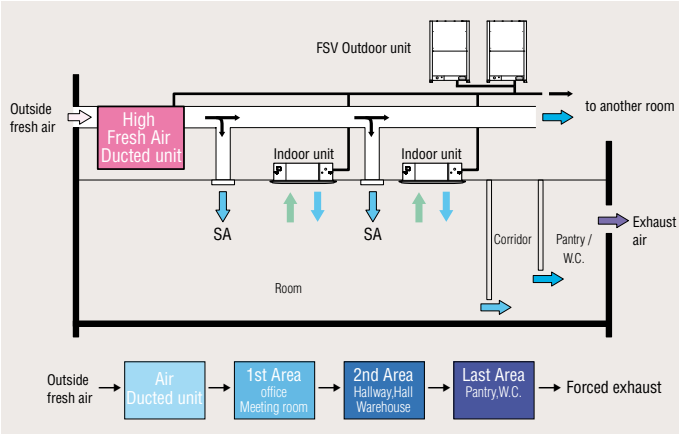

Mix operation unit with standard indoor units

Possible to combine High Fresh Air ducted indoor unit and standard air ducted indoor units.

When other indoor units are connected in same circuit, keep following capacity ratio.
H1 type/Outdoor unit < 30%, and Total of indoors(incl. H1)/outdoor <100%

Remark For High Static Ducted Series

Model	Operation	Rap valve kit **CZ-P160RVK2**	3way control PCB **CZ-CAPE2**	3way valve kit **CZ-P160HR3**	Distribution Joint kit <2pipes> **CZ-P160BK2** for 22.4kW unit or less **CZ-P680BK2** for more than 22.4kW	Distribution Joint kit <3pipes> **CZ-P224BH2** for 22.4kW unit **CZ-P680BH2** for 28.0kW unit
H1 Type **High-Fresh Air Ducted**	Cooling Only	-	-	-	-	-
	Cool or Heat	2pcs	-	-	2pcs	-
	Heat Recovery	-	-	2pcs	1pc	1pc



Optional accessory


CZ-RTC6W
CZ-RTC6WBL


CZ-RTC6
CZ-RTC6BL


CZ-RTC5B


CZ-RWS3
Remote controller


CZ-RWRC3
Receiver

Model Name			S-140MH1H5	S-224MH1H5	S-280MH1H5
Power source			220/230/240 V, 1 phase - 50 Hz		
Cooling capacity		kW	14.0	22.4	28.0
		BTU/h	47,800	76,400	95,500
Heating capacity		kW	13.2	21.2	26.5
		BTU/h	45,000	72,300	90,400
Power input	Cooling	kW	0.430/0.430/0.430	0.670/0.670/0.670	0.730/0.730/0.730
	Heating	kW	0.430/0.430/0.430	0.670/0.670/0.670	0.730/0.730/0.730
Running current	Cooling	A	2.0/1.9/1.9	3.2/3.1/3.0	3.6/3.4/3.3
	Heating	A	2.0/1.9/1.9	3.2/3.1/3.0	3.6/3.4/3.3
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate	m^3/h	1,560	1,800	2,100
		L/s	433	500	583
	Motor output	kW	0.3	0.38	0.38
	External static pressure	Pa	185/190/195	230/260/290	220/240/260
Sound power level (H/M/L)		dB	75/76/76	78/79/79	79/80/80
Sound pressure level (H/M/L)		dB(A)	43/44/44	46/47/47	47/48/48
Dimensions	H x W x D	mm	420 x 1,065 x 620	479 x 1,428 x 1,230	479 x 1,428 x 1,230
Pipe connections	Liquid	mm (inches)	Ø9.52 (Ø3/8)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)
	Gas	mm (inches)	Ø15.88 (Ø5/8)	Ø25.4 (Ø1)	Ø25.4 (Ø1)
	Drain piping		VP-25	VP-25	VP-25
Net weight		kg	50	110	110


GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Outdoor air temperature	33°C DB / 28°C WB	0°C DB / -2.9°C WB

Specifications are subject to change without notice.


H1TYPE HIGH-FRESH AIR DUCTED Dimensions

1 Refrigerant liquid line
2 Refrigerant gas line
3 Power supply entry
4 Drain connection
5 Duct connection for suction
6 Duct connection for discharge

SIZE 140

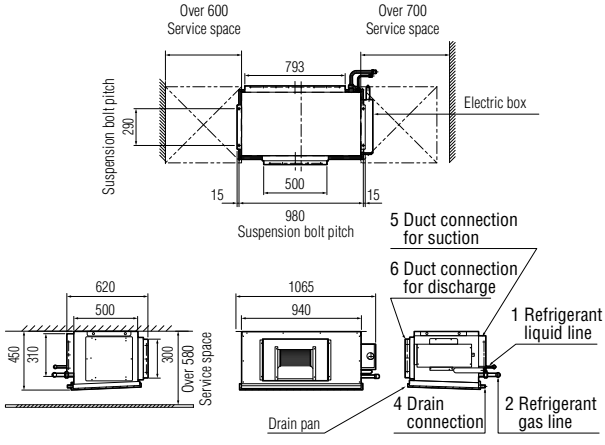

SIZE 224-280

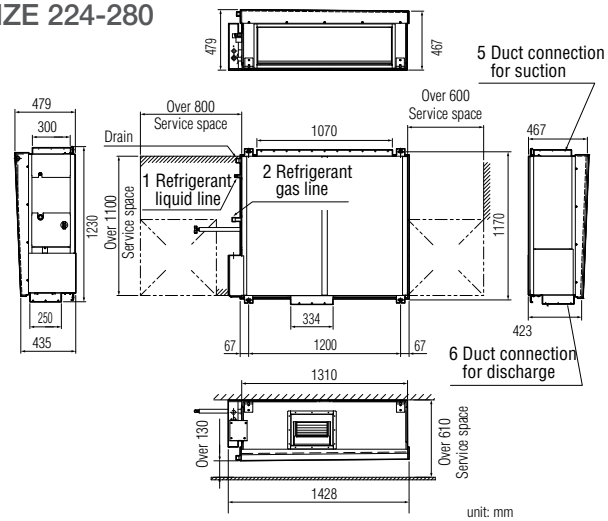

K2 TYPE Wall Mounted

DC motor



S-22MK2E5A / S-28MK2E5A
S-36MK2E5A



S-45MK2E5A / S-56MK2E5A
S-73MK2E5A / S-106MK2E5A

Optional accessory

ECONAVI

ECONAVI ready



CZ-RTC6W
CZ-RTC6WBL



CZ-RTC6
CZ-RTC6BL



CZ-CENSC1



CZ-RTC5B



CZ-RWS3
*Remote controller

*Receiver is included in the wall mounted indoor unit.

Technical focus

- Closed discharge port when not in use
- Lighter and smaller units make installation easy
- Quiet operation
- Smooth and durable design
- Piping outlet in six directions
- Washable front panel
- Air distribution is automatically altered depending on the operational mode of the unit

Noise reducing external valve kit

To reduce noise level of expansion valve.
(Optional accessory)



CZ-P56SVK2 (for 22 - 56 type)
CZ-P160SVK2 (for 73* - 106 type)

*When the pipe diameter is (Liquid) Ø6.35- (Gas) Ø12.7, please use CZ-P56SVK2.

Closed discharge port


When the unit is turned off, the flap closes completely to prevent entry of dust into the unit and to keep the equipment clean.

Model Name			S-22MK2E5A	S-28MK2E5A	S-36MK2E5A	S-45MK2E5A
Power source			220/230/240 V, 1 phase - 50 / 60 Hz			
Cooling capacity		kW	2.2	2.8	3.6	4.5
		BTU/h	7,500	9,600	12,300	15,400
Heating capacity		kW	2.50	3.20	4.20	5.0
		BTU/h	8,500	10,900	14,300	17,100
Power input	Cooling	kW	0.025/0.025/0.025	0.025/0.025/0.025	0.030/0.030/0.030	0.030/0.030/0.030
	Heating	kW	0.025/0.025/0.025	0.025/0.025/0.025	0.030/0.030/0.030	0.030/0.030/0.030
Running current	Cooling	A	0.21	0.23	0.25	0.33/0.32/0.31
	Heating	A	0.21	0.23	0.25	0.33/0.32/0.31
Fan	Type		Cross-flow fan	Cross-flow fan	Cross-flow fan	Cross-flow fan
	Air flow rate (H/M/L)	m^3/h	540/450/390	570/498/390	654/540/390	870/750/600
		L/s	150/125/108	158/138/108	182/150/108	242/208/167
	Motor output	kW	0.03	0.03	0.03	0.054
Sound power level (H/M/L)		dB	51/48/44	52/49/44	55/51/44	53/50/48
Sound pressure level (H/M/L)		dB(A)	36/33/29	37/34/29	40/36/29	38/35/33
Dimensions	H x W x D	mm	290 x 870 x 214	290 x 870 x 214	290 x 870 x 214	302 x 1,120 x 236
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)
	Drain piping	mm	Ø18	Ø18	Ø18	Ø18
Net weight		kg	9	9	9	13

Global remarkszz	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

Compact indoor units make the installation easy

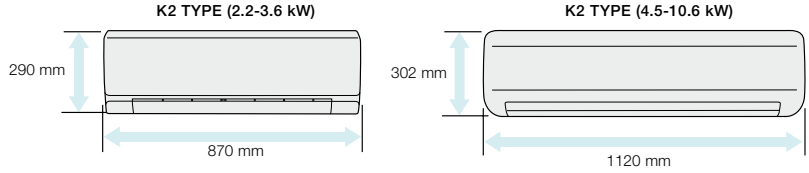

Quiet operation

Low operating noise level makes these units ideal for hotels and hospital applications.

Smooth and durable design

The smooth cover means these units match most modern interiors.
Their compact size enables them to blend in, even in small spaces.

Piping outlet in six directions

Piping outlet is possible in the six directions of right, right rear, right bottom, left, left rear, left bottom, making installation easier.


Washable front panel

The indoor unit's front panel can be easily removed and washed for trouble-free maintenance.



Air distribution is automatically adjusted depending on the operational mode of the unit

Air outlet angle is automatically adjusted for cooling and heating operation.



Heating: F1 to F5
Cooling: F1 to F3

S-56MK2E5A	S-73MK2E5A	S-106MK2E5A
220/230/240 V, 1 phase - 50 / 60 Hz		
5.6	7.3	10.6
19,100	24,900	36,200
6.3	8.0	11.4
21,500	27,300	38,900
0.035/0.035/0.035	0.055/0.055/0.055	0.080/0.080/0.080
0.035/0.035/0.035	0.055/0.055/0.055	0.080/0.080/0.080
0.36/0.35/0.34	0.52/0.51/0.50	0.72/0.70/0.68
0.36/0.35/0.34	0.52/0.51/0.50	0.72/0.70/0.68
Cross-flow fan	Cross-flow fan	Cross-flow fan
960/840/720	1,170/1,020/840	1,290/1,110/900
267/233/200	325/283/233	358/308/250
0.054	0.054	0.054
55/52/50	62/59/55	64/61/57
40/37/35	47/44/40	49/46/42
302 x 1,120 x 236	302 x 1,120 x 236	302 x 1,120 x 236
Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
Ø18	Ø18	Ø18
13	14	14

NEW

U2 TYPE 4-WAY Cassette

DC motor

Semi concealed cassette

AIR INTAKE CHAMBER



CZ-FDU3

1 [1] Air intake flange (Ø100) (field supply)
2 Air intake box CZ-ATU2*(Ø100)
3 Air intake plenum CZ-FDU3

* When using Air intake box (CZ-ATU2), Air intake plenum (CZ-FDU3) is required.

NEW PANEL DESIGN
Flat design, well-matched with interior, building.



Normal Panel : CZ-KPU3H
ECONAVI Panel : CZ-KPU3A



Technical focus

- New high performance turbo fan, new path system for heat exchanger
- Lower noise in slow fan operation
- Industry top light weight, easy piping
- Easy installation structure of the panel
- Econavi : Floor temperature and human sensor added. Activity amount detection and new circulator
- nanoe™ X : 100x for CAC (100 times more nanoe™ particle for wide commercial space). Inside cleaning by 100x nanoe™ + dry control


Flat horizontal design

The horizontal design of 4-way cassette achieves an elegant designed panel. Its slim design allow to protrude 33.5 mm from the ceiling.



Drain pump of up to 850 mm from the ceiling surface

Built in drain pump allows flexible install and design options with up to 850 mm lift. Long horizontal piping is also possible.



Easy to clean suction grille


Suction grille is able to make 90-degree turns.



360° wide & comfortable airflow

Comfort air flow control and proper energy use. Flexible Air Flow direction control by individual flap control:
-4 Flaps can be controlled individually (by standard wired remote controller*)
-Versatile air flow control to cover a wide variety of demands.


*Pre-setting is required for this function at System Test-run procedure



Temperature distribution by thermograph (cooling operation)

Simulation conditions:
14.0kW 4-way ceiling-mounted cassette type in cooling mode
/ Floor area of 225 m²
/ Ceiling height of 3 m

Ample airflow: 36 m³/min

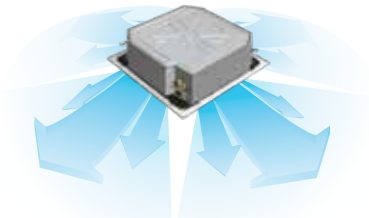

*Pre-setting is required for this function at System Test-run procedure

Model Name			S-22MU2E5BN	S-28MU2E5BN	S-36MU2E5BN	S-45MU2E5BN	S-56MU2E5BN
Power source			220/230/240 V, 1 phase - 50Hz/60Hz				
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6
		BTU/h	7,500	9,600	12,300	15,400	19,100
Heating capacity		kW	2.5	3.2	4.2	5.0	6.3
		BTU/h	8,500	10,900	14,300	17,100	21,500
Power input	Cooling	kW	0.020/0.020/0.020	0.020/0.020/0.020	0.020/0.020/0.020	0.020/0.020/0.020	0.025/0.025/0.025
	Heating	kW	0.020/0.020/0.020	0.020/0.020/0.020	0.020/0.020/0.020	0.020/0.020/0.020	0.025/0.025/0.025
Running current	Cooling	A	0.21/0.21/0.20	0.21/0.21/0.20	0.21/0.21/0.20	0.21/0.21/0.20	0.24/0.23/0.22
	Heating	A	0.20/0.20/0.19	0.20/0.20/0.19	0.20/0.20/0.19	0.20/0.20/0.19	0.23/0.22/0.21
Fan	Type		Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan
	Air flow rate (H/M/L)	m³/h	768/726/690	768/726/690	870/780/690	930/780/690	990/810/690
		L/s	213/202/192	213/202/192	242/217/192	258/217/192	275/225/192
	Motor output	kW	0.06	0.06	0.06	0.06	0.06
Sound power level (H/M/L)		dB	45/44/43	45/44/43	45/44/43	46/44/43	47/45/43
Sound pressure level (H/M/L)		dB(A)	30/29/28	30/29/28	30/29/28	31/29/28	32/30/28
Dimensions*	H x W x D	mm	256+(33.5) x 840 (950) x 840 (950)				
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)
	Drain piping		VP-25	VP-25	VP-25	VP-25	VP-25
Net weight* (Panel)		kg	19 (+5)	19 (+5)	19 (+5)	19 (+5)	19 (+5)

nanoe™X Generator Mark3

Please refer to the nanoe™ X website for the Mark 3 information.

Optional accessory

ECONAVI ready


CZ-RTC6W
CZ-RTC6WBL


CZ-RTC6
CZ-RTC6BL


CZ-RTC5B



CZ-RWS3
Remote controller


CZ-RWRU3
Receiver

High-ceiling installation (Up to 5 m for 10.6 kW and higher capacity models)

The units can be installed in rooms with high ceilings, where they provide ample floor-level heating in the winter. (See ceiling height guidelines below.)

High Ceiling (Factory settings)

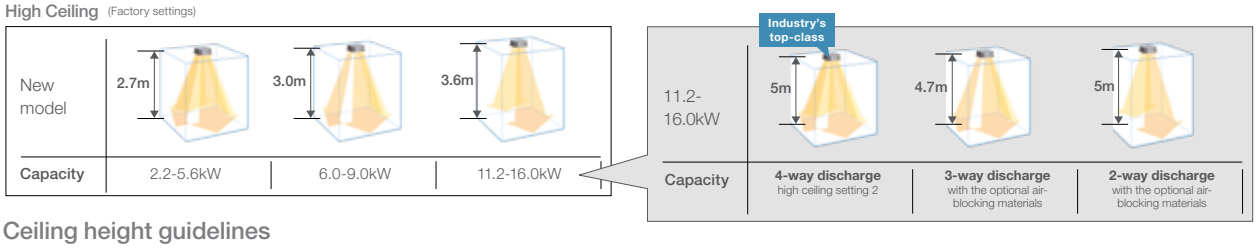

Ceiling height guidelines

*1 settings / Indoor unit	4-way discharge			3-way discharge (optional air-blocking materials)	2-way discharge (optional air-blocking materials) *2
	Factory setting 1	High ceiling setting 1	High ceiling setting 2		
2.2-5.6kW	2.7	3.2	3.5	3.8	4.2
6.0-9.0kW	3.0	3.3	3.6	3.8	4.2
11.2-16.0kW	3.6	4.3	5.0	4.7	5.0

*1 When using the unit in a configuration other than the factory settings, it is necessary to make settings on site to increase airflow.
*2 Use air-blocking materials (CZ-CFU3) to completely block two discharge outlets for 2-way airflow.

nanoe X Generator Mark 3

nanoe™ X contains plenty of OH radicals that have outstanding effects on various air pollutants, including bacteria and viruses, mould, allergens, pollen, hazadous substances, as well as deodorise odours. It also keeps moisture in your skin and hair.

nanoe™X



Invisible Air Contaminants are Suppressed

S-60MU2E5BN	S-73MU2E5BN	S-90MU2E5BN	S-112MU2E5BN	S-140MU2E5BN	S-160MU2E5BN
220/230/240 V, 1 phase - 50Hz/60Hz					
6.0	7.3	9.0	11.2	14.0	16.0
20,500	24,900	30,700	38,200	47,800	54,600
7.1	8.0	10.0	14.0	16.0	18.0
24,200	27,300	34,100	47,800	54,600	61,400
0.035/0.035/0.035	0.040/0.040/0.040	0.040/0.040/0.040	0.095/0.095/0.095	0.095/0.095/0.095	0.105/0.105/0.105
0.035/0.035/0.035	0.040/0.040/0.040	0.040/0.040/0.040	0.090/0.090/0.090	0.090/0.090/0.090	0.100/0.100/0.100
0.34/0.33/0.32	0.37/0.36/0.35	0.39/0.38/0.37	0.77/0.74/0.71	0.77/0.74/0.71	0.85/0.82/0.79
0.33/0.32/0.31	0.36/0.35/0.34	0.38/0.37/0.36	0.75/0.72/0.69	0.75/0.72/0.69	0.83/0.80/0.77
Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan
1,260/960/780	1,350/960/780	1,380/1,110/840	2,160/1,560/1,200	2,160/1,560/1,200	2,220/1,680/1,440
350/267/217	375/267/217	383/308/233	600/433/333	600/433/333	617/467/400
0.06	0.06	0.06	0.09	0.09	0.09
51/47/44	52/47/44	53/50/47	60/54/50	60/54/50	61/55/53
36/32/29	37/32/29	38/35/32	45/39/35	45/39/35	46/40/38
			319+(33.5) x 840 (950) x 840 (950)		
Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
20 (+5)	20 (+5)	20 (+5)	25 (+5)	25 (+5)	25 (+5)

Global remarks

Rated conditions: Cooling
Indoor air temperature 27°C DB / 19°C WB
Outdoor air temperature 35°C DB / 24°C WB
Rated conditions: Heating
Indoor air temperature 20°C DB
Outdoor air temperature 7°C DB / 6°C WB

* The values in ( ) for external dimensions and Net weight are the values for the optional ceiling panel.
In the case of nanoe X OFF Specifications are subject to change without notice.


Y3 TYPE 4-WAY Mini Cassette

DC motor

Mini semi concealed cassette

nanoe™ X Generator Mark3

Please refer to the nanoe™ X website for the Mark 3 information.



Panel
CZ-KPY4



Optional accessory

ECONAVI ECONAVI ready



CZ-RTC6W
CZ-RTC6WBL
CZ-RTC6WBLW



CZ-RTC6
CZ-RTC6BL
CZ-RTC6BLW



CZ-CENSC1



CZ-RTC5B



CZ-RWS3
Remote controller




CZ-RWRY3
Receiver

Technical focus

- Mini cassette fits into a 60 x 60 cm ceiling grid
- Powerful drain pump gives 850 mm lift
- Multi-directional air flow
- Easy installation
- DC fan motor with variable speed and a new heat exchanger ensures efficient power consumption
- nanoe™ X : 100x for CAC (100 times more nanoe™ particle for wide commercial space). Inside cleaning by 100x nanoe™ + dry control


Compact design

Thanks to advanced Panasonic design the panel is a compact 625 x 625 mm, offering elegant, unobtrusive installation even where space is limited.

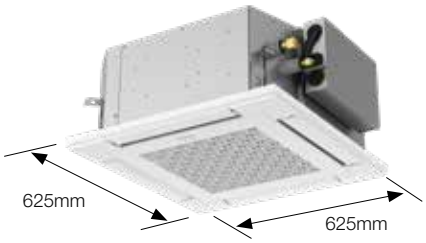


Lighter and slimmer, easier installation

When only 230 mm of indoor body height, it can easily fit in limited spaces and tight spots.
(Required 243 mm from bottom of panel to top of the unit)

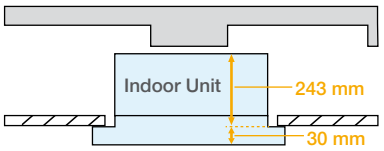


Individual flap control

Keep everyone comfortable by directing air where it's needed and away from where it isn't with individual flap control.



A drain height of up to 850 mm from the ceiling surface

The internal pump allows the drain pipe to be elevated up to 850 mm above the base of the unit.




Model Name			S-22MY3E	S-28MY3E	S-36MY3E	S-45MY3E	S-56MY3E
Power source			220/230/240 V, 1 phase - 50Hz/60Hz				
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6
		BTU/h	7,500	9,600	12,300	15,400	19,100
Heating capacity		kW	2.5	3.2	4.2	5.0	6.3
		BTU/h	8,500	10,900	14,300	17,100	21,500
Power input	Cooling	kW	0.020	0.021	0.022	0.030	0.042
	Heating	kW	0.018	0.019	0.020	0.028	0.040
Running current	Cooling	A	0.25 | 0.24 | 0.23	0.26 | 0.25 | 0.24	0.27 | 0.26 | 0.25	0.35 | 0.34 | 0.33	0.44 | 0.43 | 0.42
	Heating	A	0.22 | 0.21 | 0.20	0.23 | 0.22 | 0.21	0.24 | 0.23 | 0.22	0.32 | 0.31 | 0.30	0.41 | 0.40 | 0.39
Fan motor	Type		Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan
	Airflow rate (H/M/L)	m³/h	522/420/360	540/450/360	570/468/360	690/540/390	810/630/480
		L/s	145/117/100	150/125/100	158/130/100	192/150/108	225/175/133
	Output	kW	0.03	0.03	0.03	0.03	0.03
Sound power level (H/M/L)	Cooling	dB	48/45/43	49/45/43	50/46/43	54/49/45	57/52/48
	Heating	dB	48/45/43	49/45/43	50/46/43	54/49/45	57/52/48
Sound pressure level (H/M/L)	Cooling	dB(A)	33/30/28	34/30/28	35/31/28	39/34/30	42/37/33
	Heating	dB(A)	33/30/28	34/30/28	35/31/28	39/34/30	42/37/33
Dimensions*	H x W x D	mm	243(+30) x 575(625) x 575(625)	243(+30) x 575(625) x 575(625)	243(+30) x 575(625) x 575(625)	243(+30) x 575(625) x 575(625)	243(+30) x 575(625) x 575(625)
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)
	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20
Net weight*		kg	15(+2.8)	15(+2.8)	15(+2.8)	15(+2.8)	15(+2.8)

Global remarks	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB/ 15°C WB
	Outdoor air temperature	35°C DB/ 24°C WB	7°C DB/ 6°C WB

* The values in ( ) for external dimensions and Net weight are the values for the optional ceiling panel.
Specifications are subject to change without notice.

L1 TYPE 2-WAY Cassette

PANEL

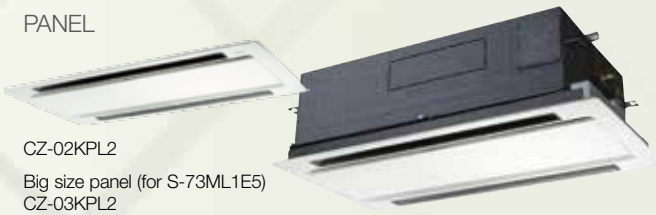

CZ-02KPL2

Big size panel (for S-73ML1E5)
CZ-03KPL2

Optional accessory



CZ-RTC6W
CZ-RTC6WBL



CZ-RTC6
CZ-RTC6BL



CZ-RTC5B



CZ-RWS3
Remote controller




CZ-RWRL3
Receiver

Technical focus

- Airflow and distribution is automatically altered depending on the operational mode of the unit
- Drain up is possible up to 500 mm via the built-in drain pump
- Simple maintenance


Auto flap control

Airflow and distribution is automatically altered depending on the operational mode (cooling or heating) of the unit.

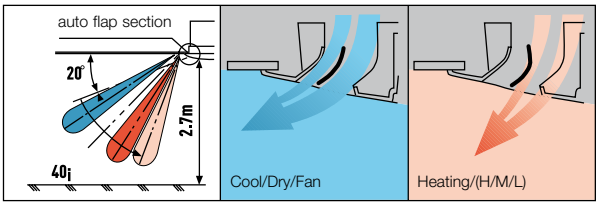

Drain up is possible up to 500 mm via the built-in drain pump.

Maintenance of the drain pump is possible from both sides, from the left side (piping side) and from the inside of the unit.

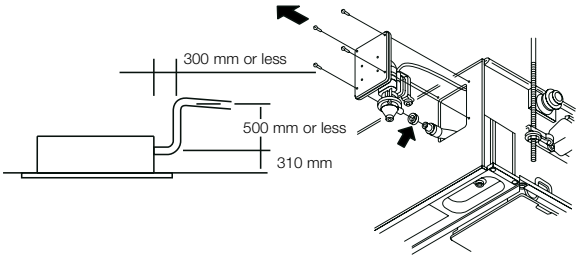

Simple maintenance

The drain pan is equipped with site wiring and can be removed. The fan case has a split construction, and the fan motor can be removed easily when the lower case is removed.

Model Name			S-22ML1E5	S-28ML1E5	S-36ML1E5	S-45ML1E5	S-56ML1E5	S-73ML1E5
Power source			1 Phase/ 50Hz					
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6	7.3
		BTU/h	7,500	9,600	12,000	15,000	19,000	25,000
Heating capacity		kW	2.5	3.2	4.2	5.0	6.3	8.0
		BTU/h	8,500	11,000	14,000	17,000	21,000	27,000
Power input	Cooling	kW	0.086/0.090/0.095	0.086/0.092/0.097	0.088/0.093/0.099	0.091/0.097/0.103	0.091/0.097/0.103	0.135/0.145/0.154
	Heating	kW	0.055/0.058/0.062	0.055/0.060/0.064	0.057/0.061/0.066	0.060/0.065/0.070	0.060/0.065/0.070	0.100/0.109/0.117
Running current	Cooling	A	0.45/0.45/0.45	0.44/0.45/0.45	0.44/0.45/0.45	0.45/0.45/0.45	0.45/0.45/0.45	0.64/0.65/0.66
	Heating	A	0.29/0.29/0.30	0.28/0.29/0.30	0.28/0.29/0.30	0.29/0.29/0.30	0.29/0.29/0.30	0.46/0.48/0.49
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	480/420/360	540/480/420	580/520/460	660/540/480	660/540/480	1,140/960/840
		L/s	133/117/100	150/133/117	161/144/128	183/150/133	183/150/133	317/267/233
	Motor output	kW	0.03	0.03	0.03	0.03	0.03	0.05
Sound power level (H/M/L)		dB	40/38/35	44/40/37	45/42/39	46/44/40	46/44/40	49/46/44
Sound pressure level (H/M/L)		dB(A)	30/27/24	33/29/26	34/31/28	35/33/29	35/33/29	38/35/33
Dimensions *	H x W x D	mm	350+(8)x840 (1,060) x600 (680)	350+(8)x840 (1,060) x600 (680)	350+(8)x840 (1,060) x600 (680)	350+(8)x840 (1,060) x600 (680)	350+(8)x840 (1,060) x600 (680)	350+(8)x 1,140 (1,360) x600 (680)
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)
	Drain piping		VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
Net weight *		kg	23 (+5.5)	23 (+5.5)	23 (+5.5)	23 (+5.5)	23 (+5.5)	30 (+9)

Global remarks	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

* The values in ( ) for external dimensions and Net weight are the values for the optional ceiling panel.
Specifications are subject to change without notice.

D1 TYPE 1-WAY Cassette

DC motor

Semi concealed slim cassette

PANEL



CZ-KPD2

Optional accessory



CZ-RTC6W
CZ-RTC6WBL

CZ-RTC6
CZ-RTC6BL

CZ-RTC5B

CZ-RWS3
Remote controller


CZ-RWRD3
Receiver

Technical focus

- Ultra-Slim profile
- Suitable for standard and high ceilings
- Built-in drain pump provides 590 mm lift from ceiling
- Easy to install and maintain
- Hanging height can be easily adjusted
- Uses a DC fan motor to improve energy-efficiency

Drain height

A built-in drain pump provides up to 590 mm lift from ceiling height for flexible install options.

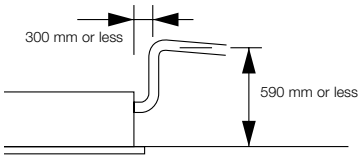

With 3 types of air-blow systems, the units can be used in various ways.



(1) One-direction “down-blow” system

Powerful one-direction “down-blow” system reaches the floor even from high ceilings (up to 4.2 m).



(2) Two-direction ceiling-mounted system

“Down-blow” and “front-blow” systems are combined in a ceiling-mounted unit to blow air over a wide area.



(3) One-direction ceiling-mounted system

This powerful ceiling-mounted “front-blow” system efficiently air-conditions the space in front of the unit.
(Additional accessories required)

Model Name			S-28MD1E5	S-36MD1E5	S-45MD1E5	S-56MD1E5	S-73MD1E5
Power source			220/230/240 V, 1 phase - 50 / 60 Hz				
Cooling capacity		kW	2.8	3.6	4.5	5.6	7.3
		BTU/h	9,600	12,000	15,000	19,000	25,000
Heating capacity		kW	3.2	4.2	5.0	6.3	8.0
		BTU/h	11,000	14,000	17,000	21,000	27,000
Power input	Cooling	kW	0.050/0.051/0.052	0.050/0.051/0.052	0.050/0.051/0.052	0.058/0.060/0.061	0.086/0.087/0.089
	Heating	kW	0.039/0.040/0.042	0.039/0.040/0.042	0.039/0.040/0.042	0.046/0.048/0.049	0.075/0.076/0.077
Running current	Cooling	A	0.40/0.39/0.39	0.40/0.39/0.39	0.40/0.39/0.39	0.46/0.46/0.46	0.71/0.70/0.69
	Heating	A	0.36/0.35/0.35	0.36/0.35/0.35	0.36/0.35/0.35	0.42/0.41/0.41	0.66/0.65/0.63
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	720/600/540	720/600/540	720/660/600	780/690/600	1,080/900/780
		L/s	200/167/150	200/167/150	200/183/167	217/192/167	300/250/217
	Motor output	kW	0.05	0.05	0.05	0.05	0.05
Sound power level (H/M/L)		dB	47/45/44	47/45/44	47/46/45	49/47/45	56/51/47
Sound pressure level (H/M/L)		dB(A)	36/34/33	36/34/33	36/35/34	38/36/34	45/40/36
Dimensions *	H x W x D	mm	200+(20) x 1,000 (1,230) x 710 (800)	200+(20) x 1,000 (1,230) x 710 (800)	200+(20) x 1,000 (1,230) x 710 (800)	200+(20) x 1,000 (1,230) x 710 (800)	200+(20) x 1,000 (1,230) x 710 (800)
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)
	Drain piping		VP-25	VP-25	VP-25	VP-25	VP-25
Net weight *		kg	21 (+5.5)	21 (+5.5)	21 (+5.5)	21 (+5.5)	22 (+5.5)

Global remarks	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

* The values in ( ) for external dimensions and Net weight are the values for the optional ceiling panel.
Specifications are subject to change without notice.

T2 TYPE Ceiling Mounted

DC motor



Optional accessory

ECONAVI

ECONAVI ready



CZ-RTC6W
CZ-RTC6WBL

CZ-RTC6
CZ-RTC6BL

CZ-CENSC1

CZ-RTC5B

CZ-RWS3
Remote controller

CZ-RWRT3
Receiver

Technical focus

- Lower sound levels
- Standardised height and depth for all models
- Long and wide air distribution
- Easy to install and maintain
- Fresh air knockout


Energy-saving technology Delivering top-class efficiency

Optimization of the shape of the casing and fan assures bigger air flow and higher efficiency.

Energy-saving performance is top class in the industry.

Top Class Energy Saving


Large Diagonal Air Flow Fan

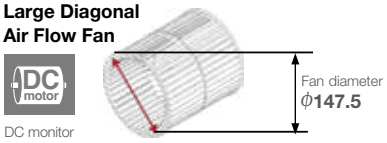

Comfortable, long-distance air flow distribution

The shape of the outlet has been optimized to provide long-distance air flow distribution. Even in deep spaces, air flow reaches every corner for exceptionally comfortable air conditioning.


High Ceiling Setting *Setting by remote control	Air flow distance
	140
4.3m	13m



*Results are based on specific testing conditions.

Multiple piping directions for flexible installation

The 5-directional drain pipe and 3-directional refrigerant pipe make installation much easier. And the neat fit with walls and ceilings assures more installation flexibility.

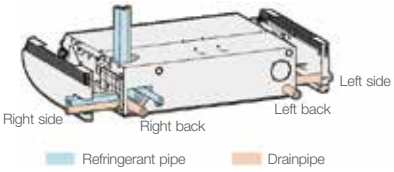

Model Name			S-36MT2E5A	S-45MT2E5A	S-56MT2E5A	S-73MT2E5A	S-106MT2E5A	S-140MT2E5A
Power source			220 / 230 / 240 V, 1 phase - 50 / 60 Hz					
Cooling capacity		kW	3.6	4.5	5.6	7.3	10.6	14.0
		BTU/h	12,300	15,400	19,100	24,900	36,200	47,800
Heating capacity		kW	4.2	5.0	6.3	8.0	11.4	16.0
		BTU/h	14,300	17,100	21,500	27,300	38,900	54,600
Power input	Cooling	kW	0.035/0.035/0.035	0.040/0.040/0.040	0.040/0.040/0.040	0.055/0.055/0.055	0.080/0.080/0.080	0.100/0.100/0.100
	Heating	kW	0.035/0.035/0.035	0.040/0.040/0.040	0.040/0.040/0.040	0.055/0.055/0.055	0.080/0.080/0.080	0.100/0.100/0.100
Running current	Cooling	A	0.37/0.36/0.35	0.39/0.38/0.37	0.39/0.38/0.37	0.45/0.44/0.43	0.69/0.67/0.65	0.82/0.79/0.77
	Heating	A	0.37/0.36/0.35	0.39/0.38/0.37	0.39/0.38/0.37	0.45/0.44/0.43	0.69/0.67/0.65	0.82/0.79/0.77
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	840/720/630	900/750/630	900/750/630	1,260/1,080/930	1,800/1,500/1,380	1,920/1,680/1,440
		L/s	233/200/175	250/208/175	250/208/175	350/300/258	500/417/383	533/467/400
	Motor output	kW	0.043	0.043	0.043	0.074	0.111	0.111
Sound power level (H/M/L)		dB	54/50/48	55/51/48	55/51/48	57/53/51	60/55/54	62/58/55
Sound pressure level (H/M/L)		dB(A)	36/32/30	37/33/30	37/33/30	39/35/33	42/37/36	44/40/37
Dimensions	H x W x D	mm	235 x 960 x 690	235 x 960 x 690	235 x 960 x 690	235 x 1,275 x 690	235 x 1,590 x 690	235 x 1,590 x 690
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
Net weight		kg	27	27	27	33	40	40

Global remarks	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

P1 TYPE Floor Standing



Optional accessory



CZ-RTC6W
CZ-RTC6WBL



CZ-RTC6
CZ-RTC6BL



CZ-RTC5B



CZ-RWS3
Remote controller




CZ-RWRC3
Receiver


Technical focus

- Pipes can be connected to either side of the unit from the bottom or rear
- Easy to install
- Front panel opens fully for easy maintenance
- Removable air discharge grille gives flexible air flow

Effective perimeter air conditioning



A wired remote control (CZ-RTC4/CZ-RTC5B) can be installed in the body

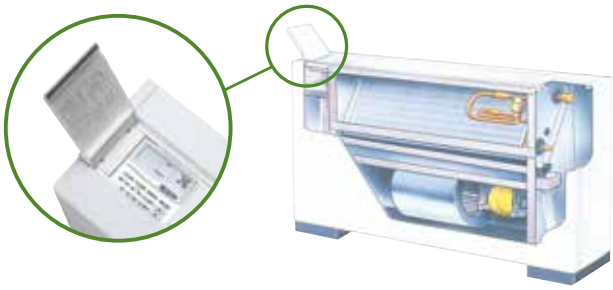


Model Name			S-22MP1E5	S-28MP1E5	S-36MP1E5	S-45MP1E5	S-56MP1E5	S-71MP1E5
Power source			220/230/240 V, 1 phase - 50 / 60 Hz					
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6	7.1
		BTU/h	7,500	9,600	12,000	15,000	19,000	24,000
Heating capacity		kW	2.5	3.2	4.2	5.0	6.3	8.0
		BTU/h	8,500	11,000	14,000	17,000	21,000	27,000
Power input	Cooling	kW	0.051/0.056/0.061	0.051/0.056/0.061	0.079/0.085/0.091	0.116/0.126/0.136	0.116/0.126/0.136	0.150/0.160/0.170
	Heating	kW	0.036/0.040/0.045	0.036/0.040/0.045	0.064/0.070/0.076	0.079/0.091/0.101	0.079/0.091/0.101	0.110/0.120/0.130
Running current	Cooling	A	0.24/0.25/0.26	0.24/0.25/0.26	0.37/0.38/0.39	0.54/0.56/0.58	0.54/0.56/0.58	0.70/0.72/0.73
	Heating	A	0.17/0.18/0.19	0.17/0.18/0.19	0.30/0.31/0.32	0.37/0.41/0.43	0.37/0.41/0.43	0.52/0.54/0.56
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	420/360/300	420/360/300	540/420/360	720/540/480	900/780/660	1,020/840/720
		L/s	117/100/83	117/100/83	150/117/100	200/150/133	250/217/183	283/233/200
	Motor output	kW	0.01	0.01	0.02	0.02	0.03	0.06
Sound power level (H/M/L)		dB	44/41/39	44/41/39	50/46/40	49/46/42	50/47/42	52/49/46
Sound pressure level (H/M/L)		dB(A)	33/30/28	33/30/28	39/35/29	38/35/31	39/36/31	41/38/35
Dimensions	H x W x D	mm	615 x 1,065 x 230	615 x 1,065 x 230	615 x 1,065 x 230	615 x 1,380 x 230	615 x 1,380 x 230	615 x 1,380 x 230
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)
	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
Net weight		kg	29	29	29	39	39	39

Global remarks	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

R1 TYPE Concealed Floor Standing



Optional accessory



CZ-RTC6W
CZ-RTC6WBL



CZ-RTC6
CZ-RTC6BL



CZ-RTC5B



CZ-RWS3
Remote controller




CZ-RWRC3
Receiver

Technical focus

- Chassis unit for discrete customisable installation
- Complete with removable filters
- Pipes can be connected to the unit either from the bottom or rear
- Easy to install

Perimeter air conditioning with high interior quality



Model Name			S-22MR1E5	S-28MR1E5	S-36MR1E5	S-45MR1E5	S-56MR1E5	S-71MR1E5
Power source			220/230/240 V. 1 phase - 50. 60 Hz					
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6	7.1
		BTU/h	7,500	9,600	12,000	15,000	19,000	24,000
Heating capacity		kW	2.5	3.2	4.2	5.0	6.3	8.0
		BTU/h	8,500	11,000	14,000	17,000	21,000	27,000
Power input	Cooling	kW	0.051/0.056/0.061	0.051/0.056/0.061	0.079/0.085/0.091	0.116/0.126/0.136	0.116/0.126/0.136	0.150/0.160/0.170
	Heating	kW	0.036/0.040/0.045	0.036/0.040/0.045	0.064/0.070/0.076	0.079/0.091/0.101	0.079/0.091/0.101	0.110/0.120/0.130
Running current	Cooling	A	0.24/0.25/0.26	0.24/0.25/0.26	0.37/0.38/0.39	0.54/0.56/0.58	0.54/0.56/0.58	0.70/0.72/0.73
	Heating	A	0.17/0.18/0.19	0.17/0.18/0.19	0.30/0.31/0.32	0.37/0.41/0.43	0.37/0.41/0.43	0.52/0.54/0.56
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m^3/h	420/360/300	420/360/300	540/420/360	720/540/480	900/780/660	1,020/840/720
		L/s	117/100/83	117/100/83	150/117/100	200/150/133	250/217/183	283/233/200
	Motor output	kW	0.01	0.01	0.02	0.02	0.03	0.06
Sound power level (H/M/L)		dB	44/41/39	44/41/39	50/46/40	49/46/42	49/46/42	52/49/46
Sound pressure level (H/M/L)		dB(A)	33/30/28	33/30/28	39/35/29	38/35/31	39/36/31	41/38/35
Dimensions	H x W x D	mm	616 x 904 x 229	616 x 904 x 229	616 x 904 x 229	616 x 1,219 x 229	616 x 1,219 x 229	616 x 1,219 x 229
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)
	Gas 410 A	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)
	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
Net weight		kg	21	21	21	28	28	28

Global remarks	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

Smart Connectivity and Control Solutions

Panasonic offers a range of smart connectivity and control solutions for residential and commercial applications that allows you to conveniently manage and monitor air conditioning units in single or multiple locations from one mobile device.

Wide Range of Smart Control Solutions for All Needs

Whether you need to control multiple sites, a single office, or your home, we offer a range of innovative smart control solutions for a variety of needs.



Panasonic Comfort Cloud

Intuitive and scalable air conditioning control solution using a personal mobile device.



VRF Smart Connectivity+

Offers efficient energy management with high indoor air quality(IAQ) control.



Panasonic AC Smart Cloud

Monitor and manage energy consumption of multiple location through a cloud computing system.

For Residential



Panasonic
Comfort Cloud

Personal Control Solutions

Panasonic Comfort Cloud

Remotely manage and monitor multiple air conditioning units in your home

Easily control and access all features of the air conditioning units with smart centralised control.



CZ-CAPWFC1

Network adaptor. Available for all types of VRF indoor units.





CZ-RTC6WBLW
CZ-RTC6BLW

WLAN remote controller

*Available for particular types of VRF indoor units. Please consult with Panasonic sales engineers.

For Light Commercial



Panasonic
Comfort Cloud

VRF Smart
Connectivity+

Cost effective Energy Management Solution

Connectable up to 200 Units with just 1 device

Multiple location control at your convenience with Comfort Cloud

Gain control of multiple zones and sites intuitively adjusting temperature by areas with differentiated user rights settings.

Indoor Air Quality(IAQ) and efficient energy usage with VRF Smart Connectivity+

- Ultimate cooling comfort with sensing technology and automatic IAQ control.
- Simplified Plug & Play installation with BMS connection for better energy consumption.

For Multiple Building Management



Panasonic AC
Smart Cloud

Full Control of All Installations From A Single Internet Connection

Panasonic AC Smart Cloud

Manage and monitor energy consumption patterns

Analyse energy usage, running time and optimise temperatures to reduce energy costs.

Centralised control solution with zero downtime

Receive real-time status updates to prevent breakdowns.

Flexible and scalable solution for expanding businesses and multi sites

Adaptable solutions that can easily be upgraded for new features, meet user demand and better IT management.

Panasonic Comfort Cloud

Control air conditioning units from wherever and whenever with your smartphone, by using Panasonic Comfort Cloud and WLAN smart adaptor.
This scalable solution is ideal for one system, one site or multiple locations. Coupling the adapter with the already feature rich systems, makes it an ideal solution for both residential and commercial applications.



For Residential	For Light Commercial
Remotely manage and monitor air conditioning units from anywhere anytime.	Gain control of multiple zones and sites intuitively up to 200 indoor units.

Panasonic Comfort Cloud features

From 1 to 200 units

User can control up to 200 indoor units. 10 different sites, with up to 20 units / groups per site.



Multiple User

The Panasonic Comfort Cloud App allows multiuser access control. Restrict user access to specific units.



Easy Scheduling

Complex weekly scheduling made simple. Not only for one units, but across multiple sites and from a smartphone.



Custom timer according to your working day and hour

Error Codes

Error code notification through the App, provides early notification and allows for faster repair.



Application examples



Centralised control from reception.



Multiple location control for small businesses.

System configuration

Network Adaptor

CZ-CAPWFC1



CZ-CAPWFC1: Available for all types of VRF

CZ-RTC6WBLW
CZ-RTC6BLW




WLAN remote controller

Connection Diagram



Indoor Unit

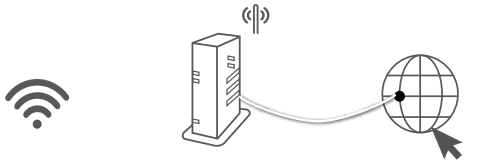

In conformity with IEEE 802.11

*Available for particular types of VRF indoor units. Please consult with Panasonic sales engineers.

WLAN smart adaptor specification

	CZ-CAPWFC1
Input Voltage	DC 12V (Supplied from indoor unit)
Power Consumption	Maximum 2.4W
Size [H x W x D]	120 x 70 x 25mm
Weight	190g (including communications lines)
Interface	Wireless LAN
Wireless LAN Standard	IEEE 802.11 b/g/n
Frequency range	2.4GHz band
Encryption	WPA2-PSK(TKIP/AES)
Operation range	0-55°C, 20 - 80RH%

Panasonic Comfort Cloud App

Download on the App Store

GET IT ON Google Play

Scan QR code to download free Panasonic Comfort Cloud App

Compatible Device and Browsers

1. IOS 9.0 or above 2. Android™ 4.4 or above

VRF Smart Connectivity+

Through thorough energy management, Panasonic's VRF Smart Connectivity+ is a completely new, state-of-the-art solution providing energy saving and comfort as well as simple installation, operation and running.



Dramatic reduction of OpEx with outstanding IAQ.
3 built-in sensors: Temperature, RH and occupancy.
ZigBee wireless sensors: CO_2 / temperature / RH%, window / door, ceiling / wall / water leakage.
Relay Pack, Hotel Room Controller.

Ultimate customisation.
Customisable colour background.
Custom display/icons, messages.
Programmable logic (also stand alone).
Various controls and various external connection devices.

User-/owner-friendly.
Colour touch screen.
Simple and easy to use.
22 languages.
Easy-to-understand error description.

Easy design and Plug & Play to reduce CapEx.
Simple Plug & Play VRF connection to Building Energy Management System (BEMS).
Stand alone or BEMS connected.
Easy installation of ZigBee sensors.

VRF Smart Connectivity+ offers efficient energy management and a new air conditioning control solution with high IAQ (indoor air quality).

Panasonic Schneider Electric

Energy management system for rooms.

Each room is monitored by high-precision sensors, making it possible to make every room's temperature comfortable without wasting energy.

Management system for the entire building.

A Building Energy Management System (BEMS) can also be connected for Plug & Play centralised control of the building's entire energy consumption.

1 Quality air control

Optimum IAQ is realized using the CO_2 and humidity sensors. The interior environment remains comfortable, while heating and cooling costs are minimized.
The CO_2 sensor can control ventilation systems, which contribute to improving the room's air quality.

2 Easy installation and integration

A remote controller is all that's required for occupancy control and optimum automatic indoor air quality (IAQ) control. Simple operation with a rented interface further contributes to increased energy efficiency and productivity for reduced capital expenditure (CapEx) and operating expense (OpEx).

3 Other equipment control

One room controller manages various devices including lighting and the blinds. A ventilation system and other external connection devices can be connected by using HRC or SE8350 so that various control is possible with this controller alone, even without BMS.

VRF Smart Connectivity+: SER8150.





Door/window sensor.
Door and window contact detection sensor to monitor opening and closing.



Wall/ceiling motion/temperature/humidity sensor.
Wall and ceiling sensor to detect the presence or absence of occupants.



CO_2 /temperature/humidity sensor.
Monitor indoor air quality, review data on interfacing devices, and control fresh air inside customisable zones.




Water leakage sensor.
Two sensing pads under the body activate when water is present between the two pads. Detecting the water, the sensor reports the event to the controller (and BEMS).



Hotel Room Controller (HRC).
The Hotel Room Controller controls connected guest room devices and aggregates data, making it visible to guest room and property management systems.

Energy management system for rooms


By installing a wall/ceiling motion temperature sensor, window/door sensor, and CO_2 sensor in the room, ideal, waste-free air conditioning is achieved.

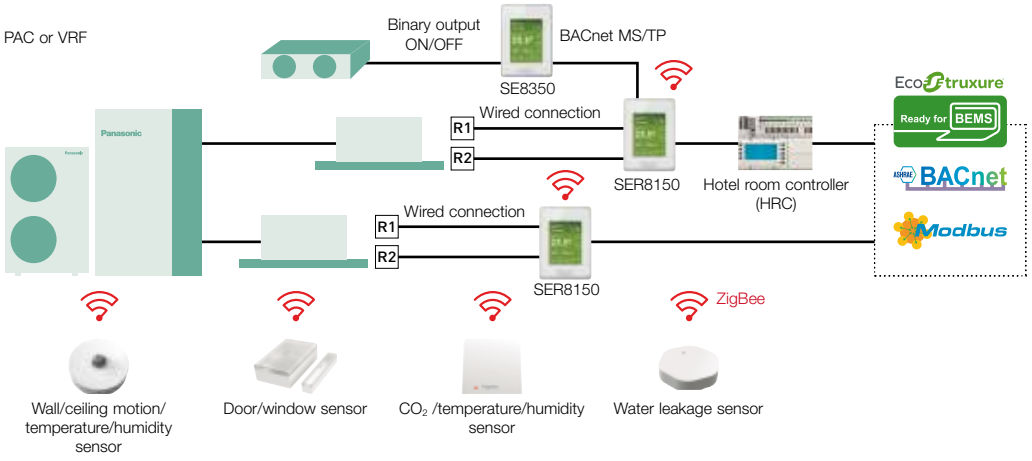

Sensing and control technology

Using sensors from Schneider Electric, high-quality occupancy control and automatic IAQ control are realised. The sensors detect the presence or absence of occupants, and the opening and closing of doors and windows to achieve the most efficient energy management for exceptional air-conditioned comfort.
Flexible installation is possible to match different applications and building features such as walls, ceilings and proximity to doors and windows. No wiring means extra installation versatility.

Batteries last for up to five years (10-year battery for CO_2 sensor) and are easy to install and replace.

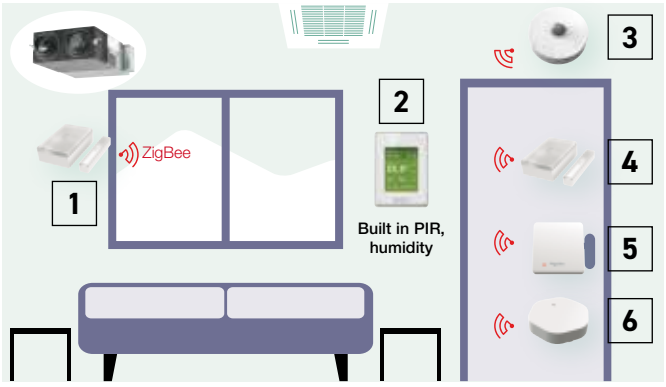

1 | Window sensor (option).
2 | Room controller.
3 | Ceiling motion sensor (option).
4 | Door sensor (option).
5 | CO_2 sensor (option).
6 | Water leakage sensor (option).



Pana Net Con, RH, No PIR, SE Brand, R1R2.
SER8150R0B1194

Pana Net Con, RH, PIR, SE Brand, R1R2.
SER8150R5B1194



Wireless ZigBee® Pro communication card.
VCM8000V5094P



Hotel room expansion module 14 indoor units.
HRCEP14R



Hotel room controller 28 indoor units.
HRCPBG28R



Hotel room controller w/display 42 indoor units.
HRCPDG42R

* Those accessories require system integrator support on site.



Sensor with room CO_2, temperature and humidity.
SED-CO2-G-5045

Sensor with room temperature and humidity.
SED-TRH-G-5045



Door/window sensor.
SED-WDC-G-5045



Wall/ceiling motion/temperature/ humidity sensor.
SED-MTH-G-5045



Water leakage sensor.
SED-WLS-G-5045



Cover frame. Silver.
FAS-00



Cover frame. White.
FAS-01



Cover frame. Glossy translucent white.
FAS-03



Cover frame. Light tan wood.
FAS-05



Cover frame. Dark brown wood
FAS-06



Cover frame. Dark black wood.
FAS-07



Cover frame. Brushed steel finish.
FAS-10

Up to 5 year battery life (batteries included). Battery life of CO_2 sensor up to 10 years. Battery level data point.

Smart management solutions



1 Hotels

Room key card or key cardless solutions for hotels.
The SER8150 and ZigBee sensor automatic detection function offer optimal air conditioning regardless of whether there is a hotel room key or not. Sensors detect the presence or absence of occupants and the opening and closing of doors and windows for the optimum air-conditioned environment guests expect. Automatic control ensures the most efficient operation when guests are away or when windows are open. This contributes to an appreciable reduction in operation costs.



2 Small and medium offices

CO_2 sensors (option) and humidity sensors.
CO_2 sensors (option) take measurements in units of ppm, and humidity sensors enable fine air quality control. This creates the most comfortable space for occupants while contributing to improved employee satisfaction.



3 Super markets

Humidity sensors.
Humidity sensors enable automatic dehumidification for the optimum IAQ regardless of climatic conditions. This creates an even more comfortable environment for customers, employees, and products themselves.


Innovative and unrivalled advantages




Colour and design to match office interiors.
Colour combinations and design can be set to match different facilities.



Easy-to-understand error description.
Error description during an emergency is easy to understand, enabling staff to respond quickly.



Customisation in 22 languages possible.
The display can be customised to match the native languages of guests to enable smooth, stress-free communication for hospitality at its finest.



Programmable logic.
Full customisation of remote controller logic possible, and updating to match conditions.

Panasonic AC Smart Cloud

With Panasonic AC Smart Cloud, have your business under control, and start saving!



Flexible and scalable solution

- **Energy saving**
- **Zero downtime**
- **Site(s) management**

Centralise control of your business premises, from wherever you are, 24/7/365.
It doesn't matter how many sites you have, or where they are!
The AC Smart Cloud system from Panasonic allows you to have complete control of all your installations, from your tablet or from your computer.
In a simple click, all your units from several locations, receive status updates in real-time of all your installations, preventing breakdowns and optimising costs.

Flexible solution for your business.

Every time | Everywhere | Multiplatform | Internet browser

Scalable solution for your business.

Small to large | 1 to multi sites | Upgrade features* | PAC / VRF


* Customised to meet user demand / Continuous upgrades: new functions and product introductions / IT smart management.

Panasonic AC Smart Cloud offers continuous improvement always thinking about users


New e-CUT function

E-CUT functions are newly available in Panasonic AC Smart Cloud.
5 energy saving settings reduces automatically its energy consumption.


1. Set temperature auto return.
When you want to return to the set temperature after a certain time even if the temperature is changed.

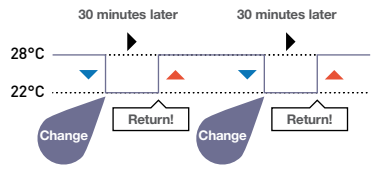


2. Unattended auto shut OFF.
When you want to operate outside of a schedule but to monitor and stop automatically.

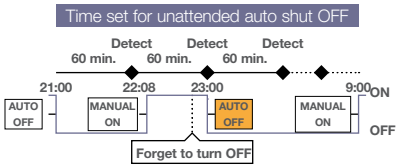


3. Set temperature range limit.
When you want to limit the temperatures that can be set.

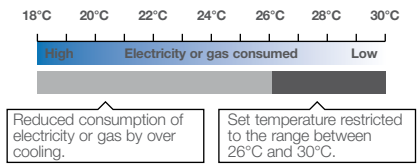

4. Energy saving timer / Efficient operation setting.
Specify time slots when you want operation capacity reduced.



5. Demand / peak shaving settings/ Peak cut settings.
Specify time slots when you want operation capacity of the outdoor units reduced.



Key functions and uniqueness

Multi site monitoring.
- It doesn't matter how many sites you have, easy to manage, operate, compare sites, locations, rooms.



Schedule setting.
- Yearly / weekly / holiday timer setting as you want




Powerful statistics for energy savings.
· Power consumption, capacity, efficiency level can be compared with different parameters (Yearly / monthly / weekly / daily bases)

Maintenance notification.
· Error notification by email and with floor layout
· Maintenance notification of PAC / VRF outdoor units
· Remote service checker function





User customisation[1].
Site administrator can create users as desired and assign customised profiles.

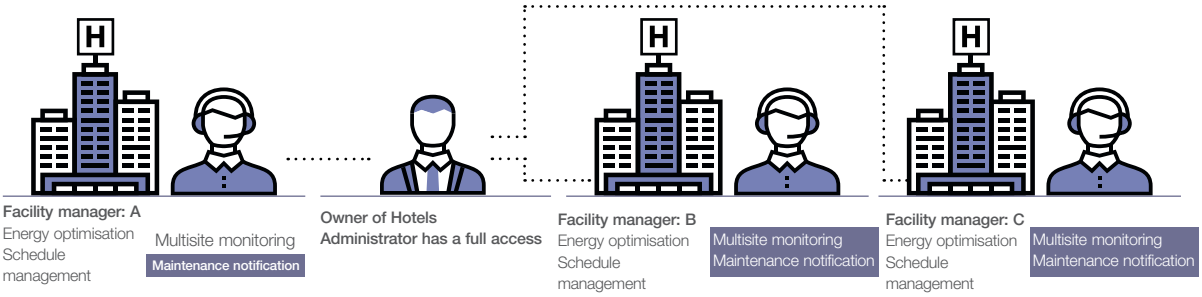

Main functions per user type

Function / Main Tab	Sub-Tab	Basic type (Eg.: Owners, facility managers)	Professional type (Eg.: Installers, maintenance companies)
AC setting	I_U / O_U operation details	✔	✔
	Cloud adapter (CZ-CFUSCC1) details	✔	✔
	AC maintenance		✔
	Map view	✔	✔
Energy saving function	NEW e-CUT	✔	✔
Schedule	Yearly, weekly schedule setting / view	✔	✔
Powerful statistics	Power consumption	✔	
	Capacity	✔	
	Efficiency ranking	✔	


Function / Main Tab	Sub-Tab	Basic type (Eg.: Owners, facility managers)	Professional type (Eg.: Installers, maintenance companies)
Maintenance function	Notification overview / details	✔	✔
	Maintenance settings	✔	✔
	Map view	✔	✔
	Remote service checker		✔
User account [1]	New / update user registration	✔	
System setting	Distribution group overview / details	✔	
	Cut OFF request	✔	
	Map editor		✔

Remote service checker function

For professional profile

Zero down time
- Quick analysis & response
- Time & Cost saving for service maintenance task

Recording service checker parameters from wherever you are!
· Data duration: Maximum 120 minutes
· Data frequency: 10 – 90 seconds
· Mode selection: With test run or Without test run
· Count down schedule setting available

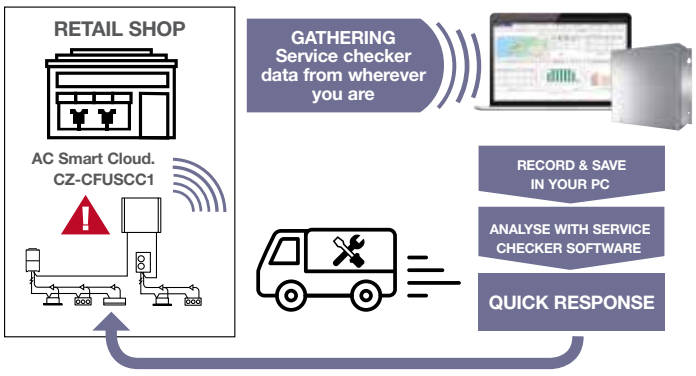

Panasonic AC Smart Cloud parts lists

*** Cloud service fee is additionally required. Please contact an authorised Panasonic dealer.**

CZ-CFUSCC1	AC Smart Cloud communication adaptor. Up to 128 groups. 128 units control

1) Please contact an authorized Panasonic dealer.

FSV Controllers

A wide variety of control options to meet the requirements of different applications.

Operation system	Individual control systems			
Requirements	Simplified high-spec operation	High-spec operation	Normal operation	Operation from anywhere in the room
External appearance				
Type, model name	Simplified high-spec Wired Remote Controller with Bluetooth	High-spec Wired Remote Controller	Timer Remote Controller (Wired)	Wireless Remote Controller
	CZ-RTC6W/CZ-RTC6WBL/ *CZ-RTC6WBLW (White) CZ-RTC6/CZ-RTC6BL/ *CZ-RTC6BLW (Black) *Available for particular types of VRF indoor units.	CZ-RTC5B	CZ-RTC4	Controller: CZ-RWS3 Receiver: CZ-RWRU3 CZ-RWRY3 CZ-RWRL3 CZ-RWRD3 CZ-RWRT3 CZ-RWRC3
Built-in thermostat	●	●	●	—
nanoe™ X on/off control *not applies to Floor Console	●	●	—	●
ECONAVI ON/OFF control	●	●	●	●
Number of indoor units which can be controlled	1 group, 8 units	1 group, 8 units	1 group, 8 units	1 group, 8 units
Use limitations	· CZ-RTC6(W) : Up to 2 controllers can be connected per group (only combination possible with CZ-RTC6(W)) · CZ-RTC6(W)BL/CZ-RTC6(W)BLW : Up to 1 controller can be connected per group	· Up to 2 controllers can be connected per group (When using ECONAVI sensor, only one remote controller is possible to connect at indoor unit)	· Up to 2 controllers can be connected per group (When using ECONAVI sensor, only one remote controller is possible to connect at indoor unit)	· Up to 2 controllers can be connected per group.
Function ON/OFF	●	●	●	●
Mode setting	●	●	●	●
Fan speed setting	●	●	●	●
Temperature setting	●	●	●	●
Air flow direction	●	●	●	●
Permit/Prohibit switching	—	—	—	—
Weekly program *	●	●	●	—

All specifications are subject to change without notice.
*(CZ-RTC6(W)BL/CZ-RTC6(W)BLW with H&C Control App)

ECONAVI Sensor

Providing outstanding energy-saving performance, Panasonic's inverter VRF System can be connected to ECONAVI to detect when energy is being wasted.ECONAVI senses the presence or absence of people and the level of activity in each area of an office. When unnecessary heating or cooling is detected, indoor units are individually controlled to match office conditions for energy-saving operation.





ECONAVI Sensor
CZ-CENSC1

Detection of the level of activity enables optimum power saving

Activity or absence of people at their desks and the level of activity in the office are detected in real time. Cooling or heating is automatically adjusted for optimum operation required to lower power consumption.

Sensor is remotely located to maximize the energy saving effect

Pillars, walls, cabinets and other fittings obstruct the sensors, reducing the area of detection and lowering the energy-saving effect. Taking into consideration blind spots, Panasonic enables the optimum layout for sensors in any office.

Remote temperature sensor

- This is a remote sensor which can be used with indoor units. Use it to detect the room temperature when no remote controller sensor or body sensor is used (connection to a system without a remote controller is possible).
- For joint use with a remote control switch, use the remote control switch as main remote controller.



CZ-CSRC3

Timer operation	Centralised control systems				
Daily and weekly program	Operation with various functions from a central location	Only ON/OFF operation from a central location	Simplified load distribution ratio (LDR) for each tenant	BMS System PC Base	Connection with 3rd Party Controller
			10.4 in. touch screen panel color LCD	**P-AIMS Software** Up to 1024 units	**Seri-Para I/O unit for outdoor unit**
				 CZ-CSWKC2	 CZ-CAPDC2
Schedule Timer	System Controller	ON/OFF Controller	Intelligent Controller		
CZ-ESWC2	CZ-64ESMC3	CZ-ANC3	CZ-256ESMC3 (CZ-CFUNC2)	**Optional software**	**Interface Adaptor**
—	—	—	—	 CZ-CSWAC2 for Load distribution CZ-CSWWC2 for Web application CZ-CSWGC2 for Object layout display CZ-CSWBC2 for BACnet software interface *PC required (field supply)	 CZ-CAPC3
—	—	—	—		
—	●	—	●		**Seri-Para I/O unit for each indoor unit**
64 groups, max. 64 units	64 groups, max. 64 units	16 groups, max. 64 units	64 units x 16 systems, max. 256 units		 CZ-CAPBC2
· Required power supply from the system controller · When there is no system controller, connection is possible to the T10 terminal of an indoor unit.	· Up to 10 controllers, can be connected to one system. · Main unit/sub unit (1 main unit + 1 sub unit) connection is possible. · Use without remote controller is possible.	· Up to 8 controllers (4 main units + 4 sub units) can be connected to one system. · Use without remote controller is impossible.	· A communication adaptor (CZ-CFUNC2) must be installed for three or more links.		**Communication Adaptor**
—	●	●	●		 CZ-CFUNC2
—	●	—	●		
—	●	—	●		**LonWorks Interface**
—	●	—	●		 CZ-CLNC2
—	●	—	●		
—	●	●	●		
●	●	—	●		

Panasonic Total Air Conditioning Management System
P-AIMS

P-AIMS basic software / CZ-CSWKC2

Up to 1024 indoor units can be controlled by one PC



Functions of basic software

- Standard remote control for all indoor units
- Many timer schedule programs can be set on the calender
- Detailed information display for alarms
- CSV file output with alarm history, operating status.
- Automatic data backup to HDD




With 4 upgrade packages the basic software can be upgraded to suit individual requirements.
For Load Distribution software, digital power meter c/w pulse require (field supply)



CZ-CFUNC2



The P-AIMS is ideal for large areas/buildings such as shopping centers, universities and office buildings.
Each line can have max.8 communication adaptors units, and control max.512 units.
In total, 1024 indoor units can be controlled by 1 “P-AIMS” PC.

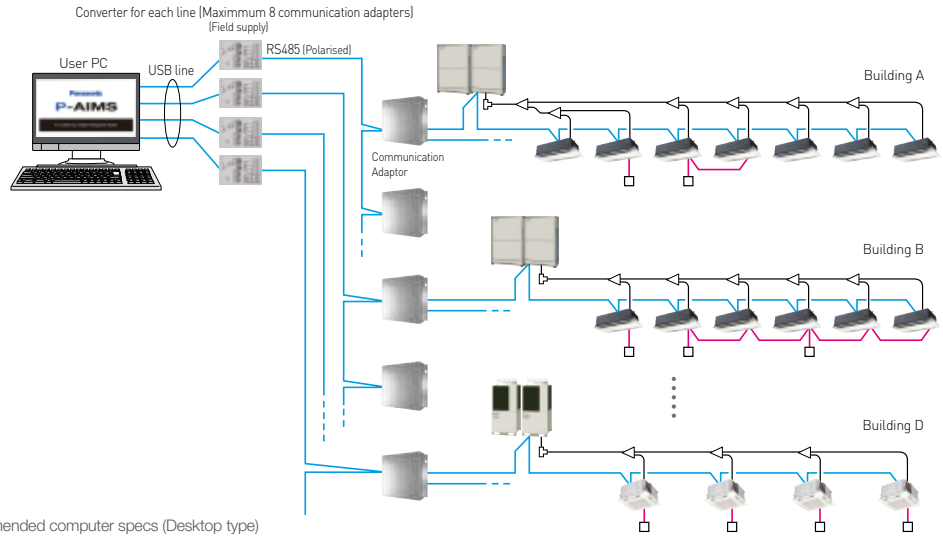

Recommended computer specs (Desktop type)

Operating system	Windows 10 Pro 64bit
CPU	Intel Core™ i5-6500 3.20GHz or higher (Recommended computer) Intel Core™ i7-7700 3.60GHz or higher (When installing Layout Display Software or using 512 or more indoor units)
Memory	8GB or larger
HDD	SSD (Solid State Drive) 250GB or larger
Monitor	1920 × 1080 (full HD) Recommended (1280 × 1024 (SXGA) minimum)
(Built-in speaker)	1920 × 1080 (full HD) Required (when installing Layout Display Software)
External HDD	500GB or larger (An external power supply type is preferable because the HDD will be used for backing up data.)
LAN	Network adaptor equipped machine (when Web Software or BACnet Communication Software installed)
UPS (Field Supply)	Select a UPS with a sine output wave form

Intelligent Controller (CZ-256ESMC3)



Touch panel

Dimensions
H 240 x W 280 x D 85 mm
Power supply AC 100 to 240 V (50/60 Hz)
LCD: 10.4 in. TFT, XGA(1024 x 768), LED backlight
UPS (Field Supply):select UPS with a sine output wave form

Product features

- 10.4 in., large, easy-to-use color LCD
  - With smartphone like operations, such as swiping and flicking
- Enhanced energy-saving control functions
  - Packed with demand functions
  - Set temperature auto return settings, Auto shutoff, Set temperature range limit settings
- Energy visualization
  - Displays electricity & gas usage distribution
  - Supports energy-saving plans with graph display function

New features

- Max 256 indoor unit [4 links x 64 units] can be controlled. In case of three or more links [more than 128 units], a communication adaptor CZ-CFUNC2 must be installed for three or more links.
- Operation is possible as batch, in zone units, and in group units.
- ON/OFF, operation mode setting, temperature setting, for fan speed setting, air flow direction setting (when used without a remote controller) and remote controller local operation prohibition [prohibition 1,2,3,4] can be done
- Graph display [trends, comparisons]
- ECONAVI ON/OFF
- Outdoor unit quiet operation ON/OFF
- Energy-saving functions
- Event control [such as equipment linkage]
- Limitation contents for prohibited operation

Prohibition means limitation of the operation contents from the remote controller. It is also possible to change the prohibition items.

Limitation contents
(Limitations can be user defined)

Individual	There is no limitation for the operation of the remote controller. However, the contents will be changed to the contents of the controller operated last. (Last-pressed priority.)
Prohibition 1	The remote controller cannot be used for ON/OFF. (All other operations are possible from the remote controller.)
Prohibition 2	The remote controller cannot be used for ON/OFF, operation mode change and temperature setting. (All other operations are possible from the remote controller.)
Prohibition 3	The remote controller cannot be used for operation mode change and temperature setting. (All other operations are possible from the remote controller.)
Prohibition 4	The remote controller cannot be used for operation mode change. (All other operations are possible from the remote controller.)

- Remote control

The LAN terminal on this unit enables you to connectit to a network. Connecting to internet will enable you to operate the unit and check the status using a PC from remote location.

- Power Distribution function


You can view cumulative electrical consumption per indoor unit or in a area.
Digital power meter with pulse require (Field Supply) for this function

Gateway for Panasonic Communication Adaptor

IntesisBox®

Gateway for Panasonic FSV systems integration into BACnet / KNX / Modbus / Home Automation networks

Easily connect with integrated controllers to become part of your building management system.

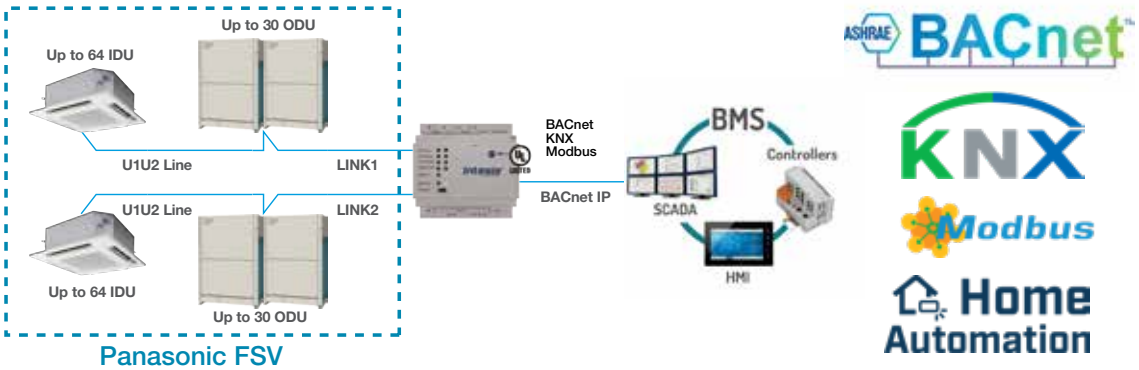

For further information, please check IntesisBox website. https://www.intesisbox.com/

Panasonic VRF Global Project References

Panasonic air conditioning systems provides comprehensive solutions to businesses around the world. Harnessing our advanced technology and extensive on-site expertise, we serve clients in a diverse range of environments throughout the world.

HOTEL

Australia Travelodge Hobart



Air Conditioning System:
VRF 3-way FSV MF2 series 8 systems
Indoor Units: 116 units
Cooling Capacity:
302 kW / 86 USRT



Indonesia Patra Jasa Hotel



Air Conditioning System:
VRF 2-way FSV ME1 series 14 systems
Indoor Units: 132 units
Cooling Capacity:
677 kW / 193 USRT



Spain Hotel Claris 5 GL



Air Conditioning System:
VRF 2-way ME1&LE1 series 11 systems
VRF 3-way MF1 series 14 systems
Indoor Units: 233 units
Cooling Capacity: 769 kW / 218 USRT




Spain Monument Hotel



Air Conditioning System:
VRF 2-way ME1 series 4 systems, VRF 3-way 12 systems
Indoor Units: 171 units
Cooling Capacity:
592 kW / 168.33 USRT



Spain LAVIDA Hotel PGA Cataluña Resort



Air Conditioning System:
VRF 2-way FSV ME2 series 2 systems
Indoor Units: 54 units
Cooling Capacity: 236 kW / 67 USRT

Russia River Park Hotel



Air Conditioning System:
VRF 2-way ME1 series 47 systems
Indoor Units: 96 units
Cooling Capacity: 788 kW / 224 USRT

Germany The LEGOLAND Castle Hotel



Air Conditioning System:
VRF 3-way MF2 series 12 systems
Indoor Units: 144 units
Cooling Capacity:
592 kW / 168.33 USRT



Ireland K Club, Co. Kildare



Air Conditioning System:
VRF 3-way FSV MF2 series 10 systems
Indoor Units: 70 units
Cooling Capacity: 200 kW / 56.87 USRT

OFFICE

Malaysia Gapruna project



Air Conditioning System:
VRF 2-way FSV ME1 series 109 systems
Indoor Units: 537 units
Cooling Capacity:
5,370 kW / 1,526 USRT



Malaysia Plaza 33 Office Block A



Air Conditioning System:
VRF 2-way FSV ME1 series 99 systems
Indoor Units: 153 units
Cooling Capacity:
3,667 kW / 1,042 USRT



Thailand Areeya



Air Conditioning System:
VRF 2-way FSV ME1 series 19 systems
Single split system 67 systems
Indoor Units: 85 units
Cooling Capacity:
1,519 kW / 432 USRT



HongKong King Yip Road



Air Conditioning System:
VRF FSM LA1 series 136 systems
Indoor Units: 294 units
Cooling Capacity:
2,108 kW / 599 USRT



England Soapworks



Air Conditioning System:
VRF 3-way MF2 series 77 systems
with ERV 167 systems



Spain PTA Malaga



Air Conditioning System:
VRF 2-way ME1 series 20 systems
Indoor Units: 74 units
Cooling Capacity:
908 kW / 258 USRT



Russia Russian Government Building



Air Conditioning System:
VRF 2-way ME1 series 42 systems
Indoor Units: 277 units
Cooling Capacity:
2,045 kW / 581 USRT

New Zealand IAG Christchurch



Air Conditioning System:
VRF 3-PIPE FSV MF2 series: 25 systems
Indoor Units: 132 units
Cooling Capacity:
976 kW / 278 USRT



RETAIL

Italy Le Centurie CENTRO COMMERCIALE



Air Conditioning System:
VRF 3-way MF1 series
18 systems
Indoor Units: 57units
Cooling Capacity:
656 kW / 186 USRT



India Sai Aarav Motors, Mehsana



Air Conditioning System:
VRF 2-way FSV ME1 series 3 systems
Indoor Units: 19 units
Cooling Capacity: 156 kW / 44 USRT

Russia Sun City Mall



Air Conditioning System:
VRF 2-way ME1 series
47 systems
VRF 3-way 12 systems
Indoor Units: 283 units
Cooling Capacity:
1,605 kW / 456 USRT



SCHOOL

United States Shippensburg University



Air Conditioning System:
VRF 3-Way MF1 series
55 systems
Indoor Units: 530 units
Cooling Capacity:
1,498 kW / 426 USRT



SCHOOL

Malaysia Xiamen University



Air Conditioning System:
VRF FSV Systems 110 systems
Indoor Units: 1,349 units
Cloud adapter: CZ-CFUSCC1 17pcs

Russia Technopark of Nobosibirsk Academgorodok



Air Conditioning System:
VRF 2-way ME1 series 38 systems,
VRF 3-way 12 systems
Indoor Units: 234 units
Cooling Capacity:
1,487 kW / 422 USRT



HOSPITAL

Indonesia Bekasi Hospital



Air Conditioning System:
VRF 2-way FSV ME1 series
42 systems
Indoor Units: 283 units
Cooling Capacity:
1,834 kW / 524 USRT



Indonesia Persada Hospital



Air Conditioning System:
VRF 2-way FSV ME1 series
21 systems
Indoor Units:116 units
Cooling Capacity:
989 kW / 281 USRT



HOSPITAL

France Clinique Dentaire Ablis (Dental Clinic)



Air Conditioning System:
mini VRF 2-way mini FSV LE1 series 3 systems
Cooling Capacity:
36.3 kW / 10.3 USRT

RESIDENTIAL

China Star River Group Luxury Condominium



Air Conditioning System:
VRF Master series 966 systems
Indoor Units: 3,948 systems
Cooling Capacity:
16,737 kW / 4,755 USRT



Singapore Punggol Eco-Town



Air Conditioning System:
Inverter multi-split
room air conditioner
Indoor Units:
Wall mounted S series (with ECOVAVI)
Control System: Panasonic HEMS



Hong Kong Gloucester Road Project



Air Conditioning System:
VRF FSM LA1 series 67 systems
Twenty series 105 systems
Indoor Units: 255 units
Cooling Capacity: 1,391 kW / 395 USRT

Hong Kong The Green Project



Air Conditioning System:
VRF FSM LA1 series 239 systems
Twenty series 538 systems
Indoor Units: 999 units
Cooling Capacity:
6,425 kW / 1,825 USRT



India Royal Orchids Eco-Green Homz



Air Conditioning System:
VRF 2-way FSV ME1 series
22 systems
Indoor Units: 139 units
Cooling Capacity:
802 kW / 228 USRT



India Heera Windfaire



Air Conditioning System:
VRF 2-way FSV ME1 series 96 systems,
VRF 3-way 12 systems
Indoor Units: 479 units
Cooling Capacity: 2,184kW / 620 USRT

Panama Mosaic Building PANAMA PACIFICO



Air Conditioning System:
VRF 2-way FSV LE1 series 156 systems
Indoor Units: 357 units
Cooling Capacity: 2,338 kW / 664 USRT

MEMO

MEMO